

An Innovative ID Card Printer Technology Leader





AN INNOVATIVE ID CARD PRINTER TECHNOLOGY LEADER

IDP, one of the ID Card Printer industry, has been dedicated to make a better ID Card Printer with diverse and innovative approaches with its technology.

IDP, one of the pioneers of ID Card printing technology, has developed and manufactured ID card printers since 2005. We differentiate ourselves by providing high quality products with the latest mechanical, electronic and software technologies and by providing the best technical supports and warranties. Our card printers support not only graphic quality color printing and laminating but also all kinds of encodings such as magnetic stripe and contact and contactless smart card.

These printers are used for all kind of cards like employee badges, student IDs, payment cards, access control card, leisure membership cards and customer loyalty cards etc.

IDP aims at making plastic card printing widely available and affordable by offering simple, on-demand and customized printing solutions that bring quality to the largest scope of business users.

We wish you and us become good partners in this industry.

smart 70
Whatever you want or need!

smart 51

smart 30

WISE
Wise Choice for the Highest Quality

Laser Personalization System
CLM-S70

smart Series

manufactured by IDP Corporation, is a highly engineered dye-sublimation ID Card printer which provides you with maximum efficiency for production of plastic cards in commercial and government applications.

SMART series is designed to support a flexible user environment, which makes it easy to choose the correct printer and save money. You can easily add a flipper or laminator, for dual sided printing or laminating, and various encoders such as magnetic stripe, contact and contactless. The enhanced FINE™ Imaging Technology of the SMART series enables you to print high quality images. The SMART Series will be a perfect choice for Employee IDs, Membership Cards, Access Control Badges, Secure Government Credentials, Social Services Cards, and even the instant issuance of Banking cards.

Please come and experience the flexibility and quality of the SMART series.



TECHNOLOGY

- Clear printing by FINE™ Imaging Technology
- Instant direct heating mechanism for lamination *Patent
- Field upgradable options for dual sided printing and laminating
- Field upgradable encoders for magnetic stripe, contact and contactless smart card
- Automatic ribbon recognition and no need for sensors & motors calibration
- Eco friendly rewritable printing (SMART-30R)
- 500 cards & scratch free (SMART-70) *Patent
- High-durability: Metal frame & shaft, all bearing (SMART-51 & 70)

SOFTWARE

- SMART SDK, to develop customized applications
- SMART Utilities, to check working states and adjust configurations
- Smart ID for designing and issuing cards
- On-Line technical support


CONVENIENCE

- User friendly design for desktop environment
- LCD & LED for status display of printer
- Easy Thermal Print Head (TPH) replacement
- Front input and output hoppers (SMART-30 & 51)
- Drop-in ribbon cartridge (SMART-30 & 51)
- Full modular design (SMART-70)
- Drawer type ribbon cartridge (SMART-70)



EASY
ISSUAING

Smart ID ensures appropriate card issuance and data management with SMART series printers at no extra cost. This application allows you to design and issue a desired card conveniently. It can be easily used with simple essential functions. Also, it is designed for advanced user to use a variety of detailed functions.



- Design and print (Image, Photo and Text)
- 1D & 2D Barcode printing
- Auto portrait (Auto face detection, adjustment of size & position)
- Printing of sequential numbers
- Card design templates
- Plug-in for supporting external devices (Sign pad, Camera, Scanner)
- Convenient card issuance and data management
- Magnetic stripe (MS), contact & contactless smart card encoding by using plug-in program

Smart ID is a software which is provided with Smart ID Card Printer.




HIGH
SECURITY

SMART series provides effective security features for access control and data encryption.



- SMART series has a password verification function to provide administrator and user authentications.
- SMART series can set a specific authorized PC for encoding and printing cards.
- SMART series can encrypt data transmitted on USB and can support SSL (Secure Socket Layer) protocol on ethernet communications.
- SMART-70 series is equipped with physical lock and Kensington lock system on each station to increase security.



POWERFUL
NETWORKING

SMART series can utilize the network printer server for encoding and printing cards.



- SMART Ethernet module can not only print cards but also encode MS, contact and contactless smart card through the network.
- SMART Ethernet module has OCP(Open Card Print) protocol which can encode and print cards by using commands on multiple platforms without installing the printer driver.
- Available encoding the contact & contactless smart card by Ethernet.


*App developed by OCP (Open Card Print) on Android or iOS mobile device



Beyond Expandability,

Ultimate ID Card Printer Solution

smart 70 is a high-performance large capacity ID card printer designed by the unique modular concept that can support various printer configurations to meet different user requirements.

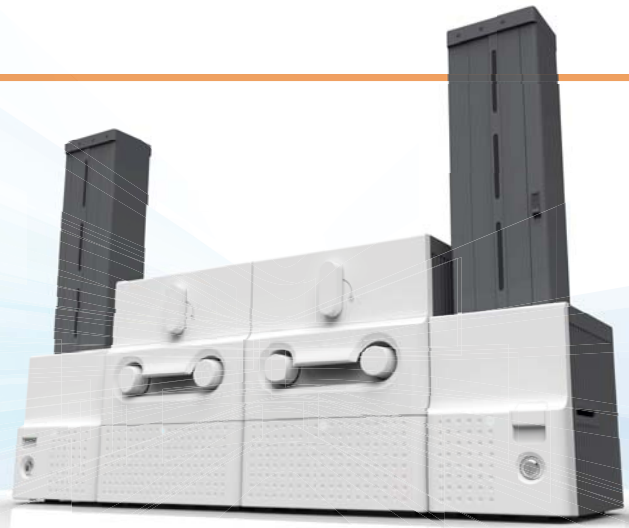

500 cards can be continuously printed, laminated and encoded on various cards.

SMART-70 consists of 5 different modules (Input Hopper, Printer, Hybrid Flipper, Laminator, Output Hopper) that can be configured in various combinations according to different customer requirements. Required modules can be easily added to extend functions depending on your needs.

FLEXIBILITY

• Single sided Printing



• Single sided Printing & Laminating



• Dual sided Printing, Encoding



• Dual sided Printing, Encoding & Laminating



• Single sided Multi-Printing / • Dual sided Multi-Printing, Laminating & Encoding



• Stand-alone Laminating



Multi - Printer Combination



364 cards/hour

Partial Area Printing (YMCKO)



288 cards/hour

Full Area Printing (YMCKO)

Extremely High Speed Printing

Input Hopper +
PRINTER (YMC) + PRINTER (KO)



* For Single sided Partial area or Full area Color Printing

Versatile Hopper



- High Volume In/Output Hopper (500 or 300 cards Cartridge Selectable)
- Multi- Hopper
- Residual Q'ty Sensor
- Physical Lock & Kensington Lock
- Scratch Free




- Input Hopper

To disperse the weight of the stacked cards, the card mallet pushes cards to the weight dispersion point and the lowest card is drawn out by hook. This process prevents the stacked cards from making scratches on the lower cards' surface.



- Output Hopper

When a card is put in the output hopper, to protect the card's surface, the loaded cards are raised by the support beam which is operated by the internal CAM.



FEATURES

- Input Hopper**
 - Large Capacity
Max. 500 cards
 - Scratch Free
 - Hook for Card-In
 - Residual Q'ty Sensor
 - Near empty & empty alert notifications
 - High Durability / Indicator LED
 - Physical Lock & Kensington Lock
- Printer**
 - High Speed Printing
Max. 1,000 cards/h (Mono), Max. 225 cards/h (YMCKO)
 - Enhanced FINE™ Imaging Technology
 - Drawer type ribbon cartridge
 - Installable MS & Contactless Encoder
 - LCD & Button / Indicator LED
 - High Durability
 - Physical Lock & Kensington Lock
- Hybrid Flipper**
 - Installable Encoding modules
Contact & Contactless Smartcard Encoder
 - Image Scanning & Barcode Recognition
Dual Sided Image Scanning (600 / 300 dpi),
1D & 2D Barcode Recognition (Front / Back)
 - Card Flipper
 - High Durability, Indicator LED
 - Error Card Bin* (Max. 30 cards)
 - Physical Lock & Kensington Lock
- Laminator**
 - No warming-up time
 - Instant direct heating mechanism
 - Scratch Free
 - Drawer type film cartridge
 - LCD & Button / Indicator LED
 - High Durability
 - Physical Lock & Kensington Lock
- Output Hopper**
 - Large Capacity
Max. 500 cards
 - Scratch Free
 - Residual Q'ty Sensor
 - Full Space alert notifications
 - High Durability
 - Indicator LED
 - Physical Lock & Kensington Lock
- Stacker**
Max. 100 cards



Input Hopper



Printer



Hybrid Flipper



Laminator



Output Hopper



Full Modular

Easily Upgradable, No need for Tools or IT technician
Just connect each station and synchronize

* If encoder or scanner options are not selected, Error card bin will be provided.

Multiple Hopper Ideal for KIOSK

max. **"3,000"**
cards loading

up to **"6"** different
type cards loading

Stand-alone Laminator

TURN ON
and
JUST LAMINATION NOW!

No Need Device Driver or PC

High Durability

Metal Frame



Metal Shaft & All Bearing

Ideal solution for printing high-quality ID cards in moments.

Single-sided SMART-51 (51S) can be transformed into a dual-sided printer (51D) or into dual-sided printer with laminator (51L) by applying Flipper module or Laminator module at the back of the printer which can be easily installable. SMART-51 Laminator is a good option for printing and laminating at the same time which enables to produce extra security long-life ID cards with customizable security patch films. With DLW (Direct Laminating in a Wink) technology, SMART-51 Laminator ensures most stable & fast laminating with premium quality protection for ID cards.

- New Input Hopper (up to 200 cards loading)
- Removable Output Hopper (*Option)
- Support of Transparent Cards
- Cartridge type Laminate Film Loading
- Support CR79 Cards
- Top-side Mag Encoding
- All-in-One type Lock System (*Option)
- Kensington Security Lock (*Option)
- Rear-side Stacker (up to 100 cards, *Option)



Single sided ID CARD PRINTER **smart-51S**



Dual sided ID CARD PRINTER **smart-51D**



Laminating ID CARD PRINTER **smart-51L**



- Color & Mono Single Sided Printing
- Print Speed: Max. 17 sec./card (YMCKO)
- 300dpi with Edge-to-Edge Printing
- 2 Lines LCD with 2 LED Buttons for Front Operation
- Support of Transparent Cards
- Low Cost Security with UV Printing
- Installable Encoders: MS, Contact & Contactless
- Upgradable Modules: Flipper, Laminator & Ethernet

- Single or Dual Sided Printing
- Print Speed: Max. 22 sec./card (YMCKOK)
- 300dpi with Edge-to-Edge Printing
- 51S Field Upgradable to 51D
- 2 Lines LCD with 2 LED Buttons for Front Operation
- Low Cost Security with UV Printing
- Installable Encoders: MS, Contact & Contactless
- Upgradable Modules: Laminator & Ethernet

- Single or Dual Sided Printing and Laminating
- Instant Direct Heating Lamination *patent
- Printing & Laminating Speed: Max. 22 sec./card (YMCK & Single Lamination)
- 300dpi with Edge-to-Edge Printing
- 51S & 51D Field Upgradable to 51L
- 2 Lines LCD with 2 LED Buttons for Front Operation
- Holographic Lamination for Visual Security & Card Durability
- Installable Encoders: MS, Contact & Contactless
- Upgradable Modules: Ethernet

- New Input Hopper
200 cards with cover open, 100 cards in default



- Removable - Output Hopper



- Improvement of Print speed
- Enhanced FINE™ Imaging Technology
- State-of-the-art CPU
- Reduced Printing Noise
- All-in-one Lock system (*Option)
- Easy to Handle Laminate Film Cartridge

- Rear-side Stacker
(up to 100 cards, *Option)



- Top-side Mag Encoding (*Option)
- Support of Transparent Card
- Support CR79 Type (Factory-installed, *Option)



Simple and Easy for everyone to use

SMART-30 Series value class ID card printer for everyone which is a perfect solution for printing ID cards at a low budget. SMART-30S (single-sided), SMART-30D (dual-sided) and SMART-30R (rewritable) printer models are available.

SMART-30 Rewritable printer is an ideal solution for printing temporary information on ID cards.

Applications

- Employee ID card
- Student ID
- Payment card
- Health card
- Leisure resort pass card
- Identification card
- Transport pass card
- Loyalty card / Event card



Single sided ID CARD PRINTER **smart-30S**



- Color & Mono Single Sided Printing
- Print Speed: Max. 23 sec./card (YMCKO)
- 300dpi with Edge-to-Edge Printing
- LED Button for Front Operation
- Low Cost Security with UV Printing
- Installable Encoders: MS, Contact & Contactless
- Upgradable Modules: Flipper & Ethernet

Dual sided ID CARD PRINTER **smart-30D**




- Single or Dual Sided Printing
- Print Speed: Max. 29 sec./card (YMCKOK)
- 300dpi with Edge-to-Edge Printing
- Field Upgradable by Installation of Flipper on SMART-30S
- LED Button for Front Operation
- Low Cost Security with UV Printing
- Installable Encoders: MS, Contact & Contactless
- Upgradable Modules: Ethernet

Rewritable ID CARD PRINTER **smart-30R**



- Direct Thermal Rewritable Method
- Rewrite Speed: Max. 12 sec./card
- LED Button for Front Operation
- Installable Encoders: MS, Contact & Contactless
- Upgradable Modules: Ethernet

High-Security

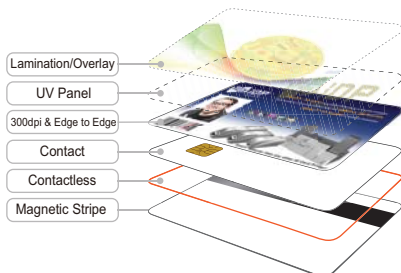

Networking



Available encoding the contact & contactless smart card by Ethernet

Rewritable



Provides a cost effective solution!

Applications

- ID / Membership
- Access control / Security
- Healthcare
- Banking Card
- Transportation
- Retail
- Gift / Promotion / Loyalty

Print with Security



UV Printing



Media Cassettes



Security Erase

Reverse-transfer printing process



Consumables



Ink Ribbon & Retransfer Film

Retransfer class ID CARD PRINTER **WISE-CXD80**



FEATURES

- Color & Mono Single or Dual Sided Printing
- Print Speed : 29 sec./card (YMCK)
- Detachable and anytime-refillable hopper
- Intuitive and flexible function LCD panel
- Removable and water-washable cleaning roller
- Security locks on hopper & front door
- Kensington lock
- Inline encoding and lamination (with optional unit)
- Environmentally friendly compact design

Retransfer class ID CARD PRINTER **WISE-CL600**

The superior quality of lamination printing for high security








WISE-CL600 Laminator

WISE-CXD80 Printer

Specifications

Model		WISE-CXD80S (Single side)	WISE-CXD80D (Dual sides)
Printing	Print Type	Dye Sublimation / Resin Thermal Retransfer	
	Print Area	Full Bleed (Real edge-to-edge)	
	Resolution	300 dpi	
Card	Card Feeding	Automatic	
	Card Size	ISO CR80 (54mm x 86mm / 2.12"x3.38")	
	Card Thickness	0.25mm(10mil) ~ 1.0mm(40mil)	
	Card Type	PVC, Composite PVC, PET	
Print Speed	YMCK	29 sec./card (124 cards/hour)	29 sec./card (124 cards/hour)
	YMCKK	-	40 sec./card (90 cards/hour)
Capacity	Input & Output	100 cards each(0.76mm)	
System	Supported Platform	Microsoft Windows 2000 Pro., XP, Vista, Windows Sever 2003 R2 SP2, Sever 2008	
	Communication	USB2.0, Ethernet fitted as standard	
	Power Supply	Max. 3A (100V to 120V), Max. 1.5A (220V to 240V)	
	Temperature/Humidity	15~35 °C / 35~70%	
Dimensions	Dimensions (WxLxH)	343mm (13.5") x 322mm (12.7") x 335mm (13.2")	
	Weight (kg/lbs)	13.0 / 28.7 (without optional unit)	15.5 / 34.2 (without optional unit)
Ribbon		YMCK (1,000 prints), YMCKK (750 prints), YMCKUV (750 prints), YMCKPO (750 prints)	
		Retransfer Film (1,000 prints)	
Options		Magnetic stripe Encoding (HiCo/LoCo), Contact chip Encoding (Read/Write)	
		Contactless Encoding, Bend Remedy Unit, Lamination Unit (*WISE-CL600)	
Certifications		CE, FCC, KC	

COLOR RIBBONS

 YMCKO 500 Cards/Roll Full Color Ribbon with Resin Black & Overlay
 YMCKOK 500 Cards/Roll Full Color Ribbon with Resin Black, Overlay & Black for Back Side
 YMCFKO 500 Cards/Roll Full Color Ribbon with UV Panel, Resin Black and Overlay
 HYMCKO 1000 Cards/Roll Half Panel Size Color Ribbon with Resin Black and Overlay
 YMC 1000 Cards/Roll Full Color Ribbon





MONO RIBBONS

KO	1500 Cards/Roll	Black with Overlay
K	3000 Cards/Roll	Black
W	3000 Cards/Roll	White
B	3000 Cards/Roll	Blue
R	3000 Cards/Roll	Red
MG	3000 Cards/Roll	Metallic Gold
MS	3000 Cards/Roll	Metallic Silver
SO	3000 Cards/Roll	Scratch-Off

SECURITY FILMS

HPF	500 Cards/Roll	Hologram Patch Film
CPF	500 Cards/Roll	Clear Patch Film

COLOR RIBBONS

 YMCKO 250 Cards/Roll Full Color Ribbon with Resin Black & Overlay
 YMCKOK 200 Cards/Roll Full Color Ribbon with Resin Black, Overlay & Black for Back Side
 YMCFKO 200 Cards/Roll Full Color Ribbon with UV Panel, Resin Black and Overlay
 HYMCKO 350 Cards/Roll Half Panel Size Color Ribbon with Resin Black and Overlay





MONO RIBBONS


KO	600 Cards/Roll	Black with Overlay
K	1200 Cards/Roll	Black
W	1200 Cards/Roll	White
B	1200 Cards/Roll	Blue
R	1200 Cards/Roll	Red
MG	1200 Cards/Roll	Metallic Gold
MS	1200 Cards/Roll	Metallic Silver
SO	1200 Cards/Roll	Scratch-Off

SECURITY FILMS

HPF	250 Cards/Roll	Hologram Patch Film
CPF	250 Cards/Roll	Clear Patch Film

Cleaning Kits & White Card

			
Long Cleaning Card	Short Cleaning Card	Cleaning Swab	Cleaning Pen
Automatic Cleaning	Manual Cleaning	Print Head & Roller Cleaning	Print Head Cleaning


Primuss Card
PVC, CR80

smart-70 Printer

Printing	Print Type	Direct Dye-Sublimation
	Print Area	Edge to Edge
	Resolution	300dpi
Card	Card Feeding	Automatic
	Card Size	ISO CR80 (54mm x 86mm / 2.12" x 3.38")
	Card Thickness	0.38mm (15mil), 1.2mm (47mil)
	Card Type	PVC, Composite PVC, PET
Print Speed	Monochrome	3.6 sec./card (1,000 cards/hour)
	YMCKO	Max. 16 sec./card (225 cards/hour)
	YMCKOK	Max. 22 sec./card (164 cards/hour)
Capacity	Input Hopper: Card	500 cards
	Output Hopper: Card	Stacker : 100 cards / *Optional Output Hopper : 500 cards
System	Memory	64MB RAM
	Interface	2 Line LCD / 4 Buttons / 1 LED Indicator
	Supported Platforms	MS Windows 7/ 8 /10, Mac OS, Linux
	Communication	USB, 2 USB Host, Ethernet
	Power Supply	Free voltage (AC 100/ 220V, 50~60Hz)
	Power Consumption	24V, 2A
	Temperature/Humidity	15~35°C / 35~70%
Encoding Options	Magnetic	ISO 7811 (Track I, II, III Read/ Write, HiCo/ LoCo), JIS II
	Contactless	MIFARE, ISO 14443 (Type A/ B), ISO 15693, DESFIRE, iCLASS
Security	Physical Lock	Ribbon
	S/W	PC authentication, Password authentication
	Station Itself	Kensington Lock
Dimensions	Millimeter	240 (W) x 214 (L) x 305 (H)
	Inch	9.5 (W) x 8.4 (L) x 12 (H)
Weight	kg/lbs	Approx. 6.3 kg/13.9 lbs

*Print Speed : May change under specific condition.

smart-70 Laminator

Laminating	Type	Direct Heating Lamination
	Speed	16.5 sec./card (Single-sided Laminating)
Laminating Film	Type	Clear, Holographic
	Thickness	0.6mil, 1.0mil
	Capacity	500 cards/Roll
System	Interface	2 Line LCD / 4 Buttons / 1 LED Indicator
	Communication	USB, RS-232C
	Power Supply	Free Voltage (AC 100/ 220V, 50~60Hz) / 24V, 2.3A
	Power Consumption	24V, 2.3A
	Temperature/Humidity	15~35°C / 35~70%
Security	Physical Lock	Laminating Film
	Station Itself	Kensington Lock
Dimensions	Millimeter	240 (W) x 214 (L) x 305 (H)
	Inch	9.5 (W) x 8.4 (L) x 12 (H)
Weight	kg/lbs	Approx. 6.1 kg/13.4 lbs

smart-70 Hybrid Flipper

Encoding Options	Contact	ISO 7816 A/B/C Card, ISO 7816 1/2/3/4 Microprocessor Card
	Contactless	ISO 14443 (Type A/B), Mifare, DEFIRE, iCLASS, ISO 18092(NFC), Felica
Scanner Options	Image Scanner	Selectable 300 & 600 dpi Dual-sided image scanning resolution,
	Scanning Speed	4.5sec/card (300 dpi), 6sec/card (600 dpi)
	Barcode Recognition	1D & 2D Barcode Recognition (Front/Back)
System	Communication	USB
	Power Supply	Free Voltage (AC 100/ 220V, 50~60Hz)
	Power Consumption	24V, 2A
	Temperature/Humidity	15~35°C / 35~70%
Security	Physical Lock	Encoder or Error Card
	Station Itself	Kensington Lock
Dimensions	Millimeter	110 (W) x 204 (L) x 305 (H)
	Inch	4.3 (W) x 8.0 (L) x 12 (H)
Weight	kg/lbs	Approx. 2.8 kg/6.2 lbs. (Without Optional modules)
Error Card Bin Ejection device for faulty card is equipped inside Flipper (Max. 30 cards)		* If encoder or scanner options are not selected, Error Card Bin will be provided.

smart-70 Input/Output Hopper

Capacity	Input / Output	500 or 300 cards Cartridge Selectable
	Feeding	Automatic
Card	Size	ISO CR80 (54mm x 86mm / 2.12" x 3.38")
	Thickness	0.38mm (15mil), 1.2mm (47mil)
	Type	PVC, Composite PVC, PET
Sensor	Residual Q'ty Sensor	Input: Near Empty & Empty / Output: Full Space
	Detection Sensor	Cartridge Mount Status Detectable
System	Communication	USB, RS-232C
	Power	Free Voltage (AC 100/ 220V, 50~60Hz) / 24V, 2A
	Temperature/Humidity	15~35°C / 35~70%
Security	Physical Lock	Cartridge
	Station Itself	Kensington Lock
Dimensions	Input Hopper (W x L x H)	170 x 204 x 548 mm / 6.7 x 8.0 x 21.6 inch
	Output Hopper (W x L x H)	149 x 204 x 548 mm / 5.9 x 8.0 x 21.6 inch
Weight	Input Hopper (kg/lbs)	Approx. 3.7 kg/8.2 lbs
	Output Hopper (kg/lbs)	Approx. 3.5 kg/7.6 lbs

smart -51 & 30 Series

Model		Standard Class			Value Class			
		SMART-51S	SMART-51D	SMART-51L	SMART-30S	SMART-30D	SMART-30R	
		Single Sided	Dual Sided	Dual Sided & Laminator	Single Sided	Dual Sided	Rewritable	
Printing	Print Type	Dye-Sublimation			Dye-Sublimation		Thermal Transfer	
	Print Area	Edge to Edge						
	Resolution	300dpi						
	Dual Side Printing	Option (with Flipper)	Yes	Yes (Flipper Installed)	Option (with Flipper)	Yes	No	
Card	Card Feeding	Automatic						
	Card Size	ISO CR80 or ISO CR79 (Option-Factory installed)			ISO CR80			
	Card Thickness	0.38mm (15mil), 1.0mm (40mil)			0.38mm (15mil), 0.76mm (30mil)			
	Card Type	PVC, PET, Composite PVC	PVC, PET, Composite PVC	PVC, PET, Composite PVC	PVC, PET, Composite PVC	PVC, PET, Composite PVC	Rewritable Thermo-chromic Material	
Print Speed	Monochrome	5 sec./card (720 cards/hour)	5 sec./card (720 cards/hour)	5 sec./card (720 cards/hour)	5 sec./card (720 cards/hour)	5 sec./card (720 cards/hour)	Max. 12 sec./card (300 cards/hour)	
	YMCKO	Max. 17 sec./card (212 cards/hour)	Max. 17 sec./card (212 cards/hour)	Max. 17 sec./card (212 cards/hour)	Max.23 sec./card (156 cards/hour)	Max. 23 sec./card (156 cards/hour)	-	
	YMCKOK	-	Max. 22 sec./card (164 cards/hour)	Max. 22 sec./card (164 cards/hour)	-	Max. 29 sec./card (124 cards/hour)	-	
Laminating	Mode	-	-	Single & Dual	-	-	-	
	Film (Clear & Holographic)	-	-	0.6mil, 1.0mil	-	-	-	
	Speed	Simultaneous	-	-	22 sec./card (YMCK)	-	-	-
		(Single Lamination)	-	-	32 sec./card (YMCKK)	-	-	-
		One by One	-	-	43 sec./card (YMCK)	-	-	-
(Single Lamination)	-	-	53 sec./card (YMCKK)	-	-	-		
Capacity	Input Hopper: Card	100 Cards / 200 Cards with cover open			80			
	Output Hopper: Card	Front : 40 Cards / Rear : 100 Cards (Optional Rear-side Stacker)			25			
System	Memory	64MB RAM						
	Display	2 Line LCD			-			
	Control Panel	2 LED Buttons			1 LED Button			
	Supported Platforms	Microsoft Windows 7/ 8 /10, Mac OS, Linux						
	Communication	USB, Ethernet (Option)						
	Power Supply	Free Voltage (AC 100/ 220V, 50~60Hz)						
	Power Consumption	48	48	96	48	48	48	
	Temperature/Humidity	15~35℃ / 35~70%						
Dimensions	Millimeter (WxLxH)	165 x 390 x210	165 x 498 x 210	165 x 675 x 210	172 x 377 x 190	172 x 472 x 190	172 x 377 x 190	
	Inch (WxLxH)	6.5 x 15.4 x 8.3	6.5 x 19.6 x 8.3	6.5 x 26.6 x 8.3	6.8 x 14.8 x 7.5	6.8 x 18.6 x 7.5	6.8 x 14.8 x 7.5	
Weight	Kg/lbs	4.5 / 10	5.2 / 11.5	8.8 / 19.4	3.4 / 7.5	4.2 / 9.5	3.4 / 7.5	
Encoding Options	Magnetic	ISO 7811 (Track I, II, III Read/ Write, HiCo/ LoCo), JIS II						
	Contact	ISO 7816 (ID-1)						
	Contactless	MIFARE, ISO 14443 (Type A/ B), ISO 15693, DESFIRE, iCLASS						
Certifications	Certifications	CB, CE, FCC, KC, CCC			CB, CE, FCC, KC, C-tick			

*Print Speed : May change under specific condition.

Specifications and availability may change without notice.

IDP Corp., Ltd.

- OFFICE : #601, 50, Digital-ro 33-gil, Guro-gu,
Seoul, Korea, 08377
- TEL : +82-2-6099-3700 • FAX : +82-2-6099-3717
- E-mail : sales@idp-corp.com

IDP Americas, Inc.

- OFFICE : 200 Circuit Drive, North Kingstown, RI 02852
- TEL : +1-401-400-7111 • FAX : +1-401-667-7445
- E-mail : sales.na@idpnorthamerica.com

IDP Middle East

- OFFICE : 13F, Jafza View 18, Downtown Jebel Ali
P.O.Box 17588, Dubai - U.A.E.
- TEL : +971-4-889-5900
- E-mail : manupark@idp-corp.com