

# PS SERIES

## 6 Amp and 10 Amp, 24 Volt Power Supplies

The PS Series are independently configurable power supplies, allowing you to pair any input with any output, and feature LED diagnostics for troubleshooting.


The PS Series is a remote power supply line from Honeywell and is a direct replacement for the 5495/5499. The HPF-PS6B, SK-PS6 are 6 amp and the HPF-PS10B, SK-PS10 are 10 amp, remote power supplies with battery charger that may be connected to any 12 or 24 volt fire alarm control panel (FACP) or used as a standalone power supply. The PS Series provides 24 VDC power for NACs (notification appliance circuits) configured as either Class B or Class A (requires the ZNAC-PS option card) with multiple sync protocol options. The PS Series also provides auxiliary power, constant or resettable, suited for detectors, annunciators, door holders, and other fire alarm system peripherals. The PS Series cabinet can hold two 7 AH or 18 AH batteries and can charge up to 33 AH batteries in a separate cabinet.

### FEATURES AND BENEFITS

- Up to five (6 amp model) or seven (10 amp model) independently-configurable, power-limited output circuits for:
  - Class B and/or Class A NACs
  - Class B and/or Class A resettable or non-resettable 24V auxiliary power
  - door holder power
- Converts from Class B to Class A wiring without losing any outputs using the ZNAC-PS converter card (sold separately)
- Optimal for powering four-wire smoke detectors, annunciators, and other system peripherals requiring regulated power
- Optional addressable control, monitor, and relay modules and power-supervision relay (EOLR-1)
- Configurable for ANSI® Temporal 3 or Temporal 4 coded output
- UL-Listed NAC synchronization using System Sensor®, Wheelock®, Gentex®, or AMSECO® appliances
- Synchronization can be triggered from FACP NAC/remote sync outputs, cascaded power supply, or a control module, single or multi, which may be housed within the power supply cabinet
- Ability to cascade up to four power supplies
- Two (6 amp model) or three (10 amp model) fully-isolated input/control circuits which can be programmed to any output
- Two Form C normally-closed trouble relays for AC Trouble and General Trouble
- 6 or 10 amp full load output, respectively, with 3 A maximum/circuit
- Individual NAC power and trouble LEDs for diagnostic efficiency
- Trouble history mode for diagnostic support
- Wide range end-of-line supervision value (normal: 2–27K ohms)
- Selectable earth fault detection (enable or disable)
- AC trouble report delay timer
- Completely configurable via onboard DIP switches, no extra software required
- Self-contained in compact, locking cabinet constructed of heavy gauge steel with a corrosion-resistant powder coat chip and scratch-resistant finish
- Cabinet designed with ten double knockouts and a removable door for ease of installation and wiring
- Includes integral battery charger capable of charging up to 33 AH batteries
- Cabinet can house two 7 AH or 18 AH batteries
- Battery charger may be disabled via DIP switch for applications requiring larger batteries and external battery charger
- Removable terminal blocks accommodate up to 12 AWG (3.1mm<sup>2</sup>) wire
- Works with any UL 864 FACP which utilizes an industry-standard reverse-polarity notification circuit



SK-PS6/10

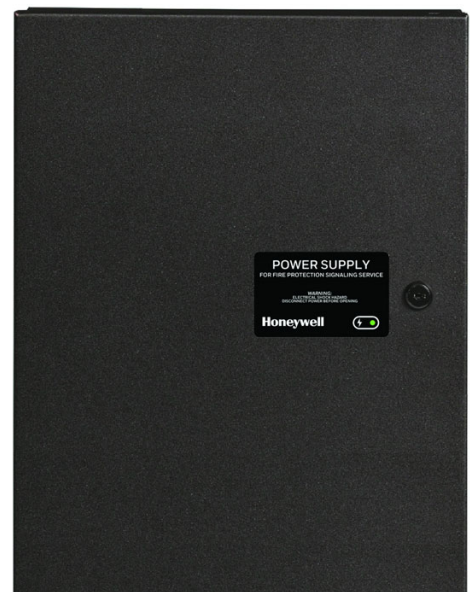

HPF-PS6/10B

- SK-PS6/10 include the Silent Knight lock set (PN:17071) and key (PN: 001347-L8)
- HPF-PS6/10B include the - Honeywell Power Products lock set (PN: 17059) and key (PN: 17051)

**Honeywell**

Farenhyt Series

## ORDERING INFORMATION

**SK-PS6:** 6.0 A, 120 VAC remote charger power supply in a lockable, metal enclosure, red

**HPF-PS6B:** 6.0 A, 120 VAC remote charger power supply in a lockable, metal enclosure, black

**SK-PS10:** 10.0 A, 120 VAC remote charger power supply in a lockable, metal enclosure, red

**HPF-PS10B:** 10.0 A, 120 VAC remote charger power supply in a lockable, metal enclosure, black

**ZNAC-PS:** Optional Class A converter card, sold separately

**SK-CONTROL, IDP-CONTROL:** Addressable Control Module for one Class B or Class A zone of supervised, polarized Notification Appliances. Notification Appliance Circuit option requires external 24 VDC to power notification appliances.

**SK-RELAY, IDP-RELAY:** Addressable relay module containing two isolated sets of Form-C contacts, which operate as a DPDT switch

**SK-MONITOR, IDP-MONITOR:** Addressable Monitor Module for one zone of normally open dry-contact initiating devices. Includes plastic cover plate and end-of-line resistor. Module may be configured for either a Class B or Class A

**SK-MONITOR-2, IDP-MONITOR-2:** Dual Monitor Module. Same as SK-MONITOR, IDP-MONITOR except it provides two inputs for Class B wiring only

**SK-RELAYMON-2, IDP-RELAYMON-2:** Provides two monitored inputs and two Form-C relays. Functions in Class B wiring only

**SK-CONTROL-6, IDP-CONTROL-6:** Six-circuit supervised control module

**SK-RELAY-6, IDP-RELAY-6:** Six Form-C relay control module

**EOLR-1:** 12/24 VDC end-of-line relay for monitoring four-wire smoke detector power

**BAT-1270-BP:** Battery, 12 volt, 7.0 AH, 5-pack (two required)

**BAT-12180-BP:** Battery, 12 volt, 18AH, 2-pack

**BAT-12330:** Battery, 12 volt, 33AH

**SEISKIT-MULTI-1:** Seismic kit for the PS Series. Includes bracket and hardware for two 7AH or two 18AH batteries.

# PS SERIES TECHNICAL SPECIFICATIONS

## PRIMARY (AC) POWER

**SK-PS6, HPF-PS6B:** 120 VAC, 50/60 Hz, 5.0A maximum

**SK-PS10, HPF-PS10B:** 120VAC, 50/60 Hz, 6.2 A maximum

**Wire Size:** #12-14 AWG with 600 V insulation

## COMMAND INPUT CIRCUIT

**Trigger Input Voltage:** 9 to 32 VDC

**Trigger Current:** 2.0 mA (16 - 32 V); Per Input: 1.0 mA (9 - 16 V)

## RELAY CIRCUITS

**Trouble Contact Rating:** 4 A at 24 VDC

## OUTPUT CIRCUITS

- 24 VDC filtered
- HPF-PS6(B), SK-PS6: TB8-TB9 – 1A Regulated, 3A special applications; TB10-TB12 – 0.3A Regulated, 3A special applications
- HPF-PS10(B), SK-PS10: TB8-TB11 – 1.5A Regulated, 3A special applications; TB12-TB14 – 0.3A Regulated, 3A special applications
- 6.0 A (HPF-PS6, SK-PS6) or 10.0 (HPF-PS10, SK-PS10) maximum total continuous current for all outputs

## SECONDARY POWER (BATTERY) CHARGING CIRCUIT

- Supports lead-acid batteries only
- Float-charge voltage: 27.6 VDC
- Maximum current charge: 1.5 A
- Maximum battery capacity: 18 AH (inside cabinet)
- Maximum battery charging capacity: 33 AH (external cabinet)

## PHYSICAL

**Dimensions:** 20.0”H x 14.5”W x 3.5”D (cm: 50.8H x 36.83W x 8.9D)

**Weight:** with two 7Ah batteries is 24 pounds (10.9 kg), with two 18 AH batteries is 39 pounds (17.7 kg)

## STANDARDS AND CODES

The HPF-PS and SK-PS comply with the following standards:

**NFPA 72:** National Fire Alarm Code

**UL 864:** Standard for Control Units for Fire Alarm Systems (NAC expander mode)

**UL 1481:** Power Supplies for Fire Alarm Systems

## AGENCY LISTINGS AND APPROVALS

These listings and approvals apply to the modules specified in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

**UL Listed:** S24562 (HPF-PS), S3511 (SK-PS)

**CSFM:** 7315-1637:0505 (HPF-PS), 7315-0559:0522 (SK-PS)

**FDNY Approved**

**FM Approved**

Farenhyt™ is a trademark of Honeywell International, Inc. Wheelock® is a registered trademark of Cooper Technologies Company. Gentex® is a registered trademark of Gentex Corporation. AMSECO® is a registered trademark of Potter Electric Signal Company, LLC. ANSI® is a registered trademark of the American National Standards Institute, Inc.

©2021 by Honeywell International Inc. All rights reserved.

Unauthorized use of this document is strictly prohibited.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

Country of origin: USA

## Honeywell Fire Solutions

12 Clintonville Road  
Northford, CT 06472-1610  
203.484.7161  
www.farenhyt.com

FH-62003 | C | 03/21  
©2021 Honeywell International Inc.

THE  
FUTURE  
IS  
WHAT  
WE  
MAKE IT

**Honeywell**