

Indoor Flat Dual-ended Photoelectric Composite Cable Datasheet 01

Building an Efficient Fiber Infrastructure.

Overview

A photoelectric composite cable is a composite cable that integrates fibers and copper wires to provide both data transmission and remote power supply functions for terminals.

Features & Benefits

- Photoelectric composite cable, providing data transmission and remote power supply
- Prefabricated XC/UPC photoelectric composite small and micro connectors at both ends
- Small outer diameter, lightweight, and small footprint
- Superior bending performance and flexibility, facilitating deployment

General Specifications


Photoelectric composite cable type	Branch cable
Installation environment	Indoor
Packaging	Independent packaging
Port type	Prefabricated XC/UPC photoelectric composite small and micro connectors at both ends
Working temperature	-10°C to +60°C
Working humidity	0% to 95% (40°C)
Minimum installation temperature	-10°C
Transportation temperature	-15°C to +60°C
Rated operating voltage (DC)	48-56 V
Rated operating current (DC)	0.25 A
Maximum power	When the length of the feeder photoelectric composite cable is 20 m, the maximum length of the branch photoelectric composite cable is 80 m. When the length of the feeder photoelectric composite cable is 2 m, the maximum length of the branch photoelectric composite cable is 150 m.
Flame retardant rating	UL94-V0

Structure

Indoor dual-ended prefabricated photoelectric composite cable assembly




Cross section of a photoelectric composite cable

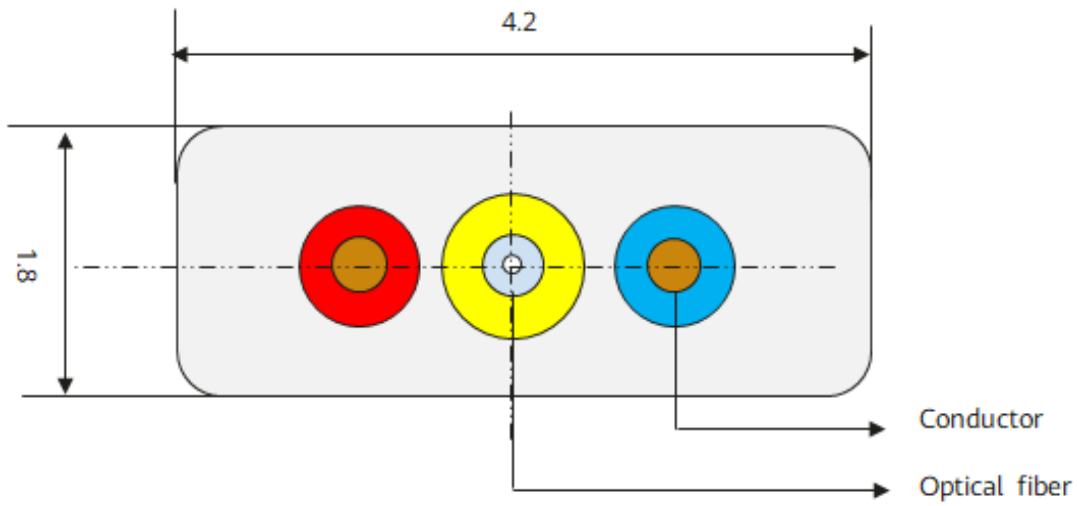

Pin assignment

Pins and connectors made by insert injection molding

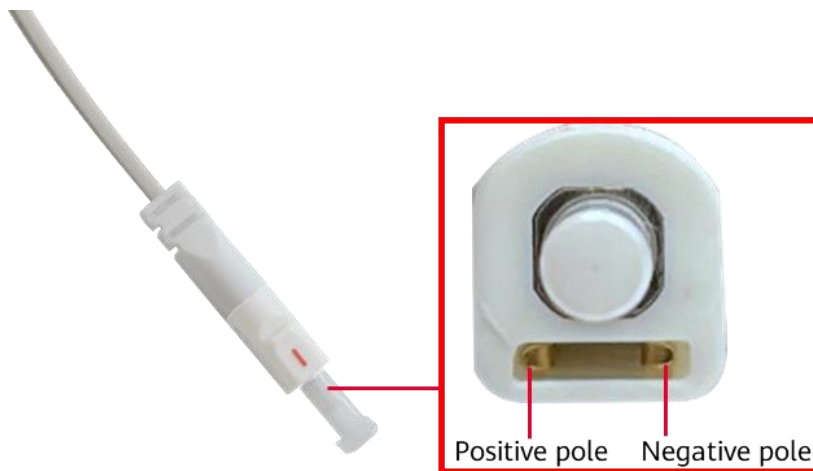

Specifications

Dimensions and structure of a photoelectric composite cable

Fiber	Fiber cores	1
	Fiber type	G.657A2
Tight tube	Diameter	0.6 mm
	Material	LSZH
Conductor	Material	Copper
	Diameter	26 AWG
	Quantity	2
Insulation jacket	Material	PVC
	Color	Positive pole: red; Negative pole: blue
	Thickness	0.3 mm
Photoelectric composite cable sheath	Material	PVC
	Color	Ivory white
Dimensions of the photoelectric composite cable		1.8 mm x 4.2 mm
Weight of the photoelectric composite cable		12 kg/km
Length of the photoelectric composite cable		10/15/20/30/40/50//60/80 m
Minimum bending radius		Static: 18 mm Dynamic: 36 mm

Optical and mechanical specifications of connectors

Connector type	XC/UPC photoelectric composite connector
Dimensions (H x W x D)	6.5 mm x 6 mm x 27 mm
Insertion loss	≤ 0.50 dB
Return loss	≥ 50 dB
Tension	70 N
Insertion times	≥ 50 times

Note: The insertion loss in the table refers to the insertion loss of the connector. The insertion loss of the product includes the insertion losses of the connector and optical cable. Insertion loss of the product = Insertion loss (connector) + Insertion loss (1 km optical cable IL)/1000 x L (optical cable length).

Electrical specifications of cables

Insulation resistance	≥ 500 MΩ; tested using 500 V DC at normal temperature for 1 minute
Dielectric withstand voltage	Leakage current less than 0.5 mA at 1000 V for 1 minute
Connectivity test	No short circuit or open circuit at normal temperature
On resistance	$R_{test} \leq (R_{cable}) + 2 \times 50 \text{ m}\Omega$

Note: $R_{cable}=140\Omega/km*L$ (km)

Mechanical specifications of the photoelectric composite cable

Tension (short-term/long-term)	150 N / 80 N
Crush (short-term/long-term)	(2200 N/100mm) / (1100 N/100mm)
Minimum bending radius (static/dynamic)	18 mm / 36 mm
Cable bending	After 8 times of $\pm 90^\circ$ bending, the cable does not crack under a 500 g load, and has no open or short circuit in composite withstand voltage and resistance tests.

Fiber specifications

Fiber mode	Single mode
Maximum attenuation	1310 nm: 0.35 dB/km 1550 nm: 0.21 dB/km
Color	Transparent


Standards

Optical standard	<ul style="list-style-type: none">IEC 60794, ITU G.657
Electrical standard	<ul style="list-style-type: none">GB/T 5023.2, IEC 61156-1-4
Flame retardant rating	<ul style="list-style-type: none">IEC 60332-1
RoHS 2.0	Compliant

Copyright © Huawei Technologies Co., Ltd. 2022. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

 HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base Bantian,
Longgang Shenzhen 518129 People's
Republic of China

Website: www.huawei.com