

SFP Transceivers

Small Form-Factor Pluggable Transceivers

Fiber optic/electrical transceivers and System-on-an-SFP miniature converters

**System™
on an
SFP**



- Fiber optic or electrical transceiver units, providing pluggable interfaces according to known standards and specifications
- MSA (Multi-Source Agreement) compliance
- System-on-an-SFP architecture, providing internal logical frame conversion
- Fast Ethernet or Gigabit Ethernet to E1/T1 or E3/T3 remote bridging
- TDM pseudowire connectivity and wire-speed packet forwarding

Serving as Interface Transceivers

SFP (Small Form-factor Pluggable) transceivers (SFPs) are hot-swappable input/output optical and electrical transceiver units, each providing a different interface according to known compliance standards and pre-determined specifications. The units are plugged into other products to provide the required interface, thus enabling optimal combination of Capex reduction, ease of network planning and stock flexibility.

RAD's SFP transceivers are fully compliant with the Multisource Agreement (MSA) specifications, and are fully interoperable with third-party standards-based devices.

On account of their small size, SFPs allow higher port densities than with other transceivers, resulting in more efficient host device design.

The intuitive squeeze-and-pull mechanism makes it easy to install SFP transceivers and remove them. Rather than replacing an entire circuit board containing several soldered-in modules, individual SFPs are unplugged and replaced for repair or upgrade, with cost savings both in maintenance and in upgrading efforts.

RAD

data communications
The Access Company

SFP Transceivers

Small Form-Factor Pluggable Transceivers

Built-in digital diagnostic monitoring (DDM) functionality is available for designated SFP types, allowing users to monitor the unit's transmitter optical output power, receiver input optical power, internal temperature, supply voltage and transmitter bias current levels in real-time.

Some of RAD's SFP's are available in industrially hardened (H) versions, designed to withstand temperatures between -40° to 85° C (-40° to 185° F).

Serving as Traffic Converters

The SFP-based converter units forward 100Base-FX Ethernet LAN packets to TDM-based WAN networks at wire-speed, fully utilizing the expensive, E1/T1 or E3/T3 rate TDM circuit bandwidth (see *Figure 1*).

The converters handle 64 to 2016-byte frames, including VLAN-tagged frames.

In event of E1/T1 or E3/T3 loss of signal, the device propagates the fault by sending an electrical LOS signal to the LAN port. In addition, the LOS LED provides a visual indication.

If the LAN traffic exceeds capacity, the flow control mechanism is activated, and Pause packets are transmitted towards the LAN port.

TDM Pseudowire Connectivity with SFP-PWE1T1

The SFP-PWE1T1 unit (see *Table 3*) is a miniature TDM pseudowire gateway, which allows transmitting E1/T1 streams over packet-switched networks. The unit converts the incoming E1/T1 data streams into 100BaseFX packets for transmission over the network (see *Figure 2*).

Specifications

FIBER OPTIC INTERFACES

Note: The specified typical range may vary according to the specific product in which the SFP is used.

For more information, refer to the data sheet of the specific product.

Table 1. Fiber Optic Fast Ethernet/STM-1/STM-4 SFPs

Ordering Name, Interface, Connector	Wavelength, Fiber Type [nm], [μm]	Standards	Transmitter Type	Input Power [dBm] [min] [max]		Output Power [dBm] [min] [max]		Typical Max. Range [km] [miles]	
				[min]	[max]	[min]	[max]	[km]	[miles]
SFP-1 Fast Ethernet/STM-1, LC	1310, 62.5/125 multimode	100BaseFX, IEEE 802.3 (FE) ANSI T1 646-1995 (STM-1)	LED	-30	-14	-20	-14	2	1.2
SFP-1D Fast Ethernet/ STM-1, LC, DDM, internal calibration	1310, 62.5/125 multimode	100BaseFX, IEEE 802.3 (FE) ANSI T1 646-1995 (STM-1)	LED	-30	-14	-20	-14	2	1.2
SFP-2 Fast Ethernet/STM-1, LC	1310, 9/125 single mode	100BaseLX10, IEEE 802.3 (FE), G.957 S1.1 (STM-1)	Laser	-28	-8	-15	-8	15	9.3
SFP-2H Fast Ethernet/STM-1, LC, industrially hardened	1310, 9/125 single mode	100BaseLX10, IEEE 802.3 (FE), G.957 S1.1 (STM-1)	Laser	-28	-8	-15	-8	15	9.3
SFP-2D Fast Ethernet/ STM-1, LC, DDM, internal calibration	1310, 9/125 single mode	100BaseLX10, IEEE 802.3 (FE), G.957 S1.1 (STM-1)	Laser	-28	-8	-15	-8	15	9.3
SFP-3 Fast Ethernet/STM-1, LC	1310, 9/125 single mode	G.957 L1.1 (STM-1)	Laser	-34	-10	-5	0	40	24.8

Table 1. Fiber Optic Fast Ethernet/STM-1/STM-4 SFPs (cont.)

Ordering Name, Interface, Connector	Wavelength, Fiber Type [nm], [μm]	Standards	Transmitter Type	Input Power [dBm]		Output Power [dBm]		Typical Max. Range	
				[min]	[max]	[min]	[max]	[km]	[miles]
SFP-3D Fast Ethernet/STM-1, LC, DDM, internal calibration	1310, 9/125 single mode	G.957 L1.1 (STM-1)	Laser	-34	-10	-5	0	40	24.8
SFP-3H Fast Ethernet/STM-1, LC, industrially hardened	1310, 9/125 single mode	G.957 L1.1 (STM-1)	Laser	-34	-10	-5	0	40	24.8
SFP-4 Fast Ethernet/STM-1, LC	1550, 9/125 single mode	G.957 L1.2 (STM-1)	Laser	-34	-10	-5	0	80	49.7
SFP-4D Fast Ethernet/STM-1, LC, DDM, internal calibration	1550, 9/125 single mode	G.957 L1.2 (STM-1)	Laser	-34	-10	-5	0	80	49.7
SFP-10A Fast Ethernet/STM-1, LC	Tx – 1310 Rx – 1550 9/125 single mode (single fiber)	100BaseBX10, IEEE 802.3 (FE) G.957 (STM-1)	Laser (WDM)	-28	-8	-14	-8	20	12.4
SFP-10B Fast Ethernet/STM-1, LC	Tx – 1550 Rx – 1310 9/125 single mode (single fiber)	100BaseBX10, IEEE 802.3 (FE) G.957 (STM-1)	Laser (WDM)	-28	-8	-14	-8	20	12.4
SFP-10AD Fast Ethernet/STM-1, LC, DDM, internal calibration	Tx – 1310 Rx – 1550 9/125 single mode (single fiber)	100BaseBX10, IEEE 802.3 (FE) G.957 (STM-1)	Laser (WDM)	-28	-8	-14	-8	20	12.4
SFP-10BD Fast Ethernet/STM-1, LC, DDM, internal calibration	Tx – 1550 Rx – 1310 9/125 single mode (single fiber)	100BaseBX10, IEEE 802.3 (FE) G.957 (STM-1)	Laser (WDM)	-28	-8	-14	-8	20	12.4
SFP-14D , STM-4, LC, DDM, internal calibration	1310, 62.5/125 multimode	–	Laser	-28	-14	-20	-14	0.5	0.3
SFP-15 STM-4, LC	1310, 9/125 single mode	G.957 S4.1	Laser	-28	-8	-15	-8	15	9.3
SFP-16 STM-4, LC	1550, 9/125 single mode	G.957 L4.2	Laser	-28	-8	-3	+2	80	49.7
SFP-18A Fast Ethernet/STM-1, LC	Tx – 1310 Rx – 1550 9/125 single mode (single fiber)	–	Laser (WDM)	-28	-8	-5	0	40	24.8
SFP-18B Fast Ethernet/STM-1, LC	Tx – 1550 Rx – 1310 9/125 single mode (single fiber)	–	Laser (WDM)	-28	-8	-5	0	40	24.8

SFP Transceivers

Small Form-Factor Pluggable Transceivers

Table 1. Fiber Optic Fast Ethernet/STM-1/STM-4 SFPs (cont.)

Ordering Name, Interface, Connector	Wavelength, Fiber Type [nm], [μm]	Standards	Transmitter Type	Input Power		Output Power		Typical Max. Range	
				[dBm] [min]	[dBm] [max]	[dBm] [min]	[dBm] [max]	[km]	[miles]
SFP-19A Fast Ethernet/STM-1, LC	Tx - 1490 Rx - 1570 9/125 single mode (single fiber)	-	Laser (WDM)	-30	-8	0	+5	80	49.7
SFP-19B Fast Ethernet/STM-1, LC	Tx - 1570 Rx - 1490 9/125 single mode (single fiber)	-	Laser (WDM)	-30	-8	0	+5	80	49.7
SFP-24 Fast Ethernet/STM-1, LC	850, 50/125 multimode 850, 62.5/125 multimode	-	VCSEL	-25	-2	-10	-4	2	1.2

Table 2. Fiber Optic Gigabit Ethernet SFPs

Ordering Name, Interface, Connector	Wavelength, Fiber Type [nm], [μm]	Standards	Transmitter Type	Input Power		Output Power		Typical Max. Range	
				[dBm] [min]	[dBm] [max]	[dBm] [min]	[dBm] [max]	[km]	[miles]
SFP-5 Gigabit Ethernet, LC	850, 50/125 multimode	1000BaseSX, IEEE 802.3 (GbE)	VCSEL	-17	0	-9.5	0	0.55	0.3
SFP-5H Gigabit Ethernet, LC, industrially hardened	850, 50/125 multimode	1000BaseSX, IEEE 802.3 (GbE)	VCSEL	-17	0	-9.5	0	0.55	0.3
SFP-5D Gigabit Ethernet, LC, DDM, internal calibration	850, 50/125 multimode	1000BaseSX, IEEE 802.3 (GbE)	VCSEL	-17	0	-9.5	0	0.55	0.3
SFP-5DH Gigabit Ethernet, LC, DDM, internal calibration, industrially hardened	850, 50/125 multimode	1000BaseSX, IEEE 802.3 (GbE)	VCSEL	-17	0	-9.5	0	0.55	0.3
SFP-6 Gigabit Ethernet, LC	1310, 9/125 single mode	1000BaseLX10, IEEE 802.3 (GbE)	Laser	-20	-3	-9.5	-3	10	6.2
SFP-6H Gigabit Ethernet, LC, industrially hardened	1310, 9/125 single mode	1000BaseLX10, IEEE 802.3 (GbE)	Laser	-20	-3	-9.5	-3	10	6.2
SFP-6D Gigabit Ethernet, LC, DDM, internal calibration	1310, 9/125 single mode	1000BaseLX10, IEEE 802.3 (GbE)	Laser	-20	-3	-9.5	-3	10	6.2
SFP-7 Gigabit Ethernet, LC	1550, 9/125 single mode	-	Laser	-22	-3	0	+5	80	49.7
SFP-7D Gigabit Ethernet, LC, DDM, internal calibration	1550, 9/125 single mode	-	Laser	-22	-3	0	+5	80	49.7

Table 2. Fiber Optic Gigabit Ethernet SFPs (cont.)

Ordering Name, Interface, Connector	Wavelength, Fiber Type [nm], [μm]	Standards	Transmitter Type	Input Power [dBm]		Output Power [dBm]		Typical Max. Range	
				[min]	[max]	[min]	[max]	[km]	[miles]
SFP-8 Gigabit Ethernet, LC	1310, 9/125 single mode	-	Laser	-21	-3	-4	+4	40	24.8
SFP-8H Gigabit Ethernet, LC, industrially hardened	1310, 9/125 single mode	-	Laser	-21	-3	-4	+4	40	24.8
SFP-8D Gigabit Ethernet, LC, DDM, internal calibration	1310, 9/125 single mode	-	Laser	-21	-3	-4	+4	40	24.8
SFP-8DH Gigabit Ethernet, LC, DDM, internal calibration, industrially hardened	1310, 9/125 single mode	-	Laser	-21	-3	-4	+4	40	24.8
SFP-17a Gigabit Ethernet, LC	Tx – 1310 Rx – 1490 9/125 single mode (single fiber)	1000BaseBX10, IEEE 802.3 (GbE)	Laser (WDM)	-20	-3	-9	-3	10	6.2
SFP-17b Gigabit Ethernet, LC	Tx – 1490 Rx – 1310 9/125 single mode (single fiber)	1000BaseBX10, IEEE 802.3 (GbE)	Laser (WDM)	-20	-3	-9	-3	10	6.2
SFP-20 Gigabit Ethernet, LC	1550, 9/125 single mode	-	Laser	-32	-3	0	+5	120	74.5
SFP-21A Gigabit Ethernet, LC	9/125 single mode (single fiber) Tx – 1310 Rx – 1490	-	Laser (WDM)	-24	-3	-5	0	40	24.8
SFP-21A Gigabit Ethernet, LC	9/125 single mode (single fiber) Tx – 1490 Rx – 1310	-	Laser (WDM)	-24	-3	-5	0	40	24.8
SFP-22A Gigabit Ethernet, LC	Tx – 1490 Rx – 1570 9/125 single mode (single fiber)	-	Laser (WDM)	-24	-3	0	+5	80	49.7
SFP-22B Gigabit Ethernet, LC	Tx – 1570 Rx – 1490 9/125 single mode (single fiber)	-	Laser (WDM)	-24	-3	0	+5	80	49.7
SFP-23A Gigabit Ethernet, LC	9/125 single mode (single fiber) Tx – 1310 Rx – 1550	-	Laser (WDM)	-24	-3	-5	0	40	24.8
SFP-23B Gigabit Ethernet, LC	9/125 single mode (single fiber) Tx – 1550 Rx – 1310	-	Laser (WDM)	-24	-3	-5	0	40	24.8

SFP Transceivers

Small Form-Factor Pluggable Transceivers

Table 3. Electrical Interface SFPs

Ordering Name, Interface, Connector	Standards	Cable Type	Impedance [Ω]	Typical Max. Range (Attenuation)	
				[m]	[ft]
SFP-9F* Fast Ethernet, RJ-45	100BaseT, IEEE 802.3	UTP, cat. 5	100	100	328
SFP-9G Gigabit Ethernet, RJ-45	1000BaseT, IEEE 802.3	UTP, cat. 5	100	100	328
SFP-11 STM-1E, mini BNC, DIN 1.0/2.3	G.703, supports CMI encoder/decoder	Coaxial	75	135 (12.7 dB)**	442
SFP-12 E3, SMB	G.703	Coaxial	75	135 (12.7 dB)**	442

Table 4. System on an SFP

Ordering Name, Interface, Connector	Standards	Cable Type	Impedance [Ω]	Typical Max. Range (Attenuation)	
				[m]	[ft]
SFP-E1T1/FE*** Fast Ethernet, E1/T1, remote bridge, RJ-45	100BaseFX, IEEE 802.3 (FE), G.703 (E1/T1)	UTP, cat. 5 (AWG-22)	120 (E1) 100 (T1)	2550 (E1) 1829 (T1)	8202 (E1) 6000 (T1)
SFP-E1T1/GbE*** Gigabit Ethernet, E1/T1, remote bridge, RJ-45	1000Base-x, IEEE 802.3 (GbE), G.703 (E1/T1)	UTP, cat. 5 (AWG-22)	120 (E1) 100 (T1)	2550 (E1) 1829 (T1)	8202 (E1) 6000 (T1)
SFP-E3T3/FE*** Fast Ethernet, E3/T3, remote bridge, mini BNC, DIN 1.0/2.3	100BaseFX, IEEE 802.3 (FE), G.703 (E3/T3)	Coaxial	75	275	900
SFP-E3T3/GbE*** Gigabit Ethernet, E3/T3, remote bridge, mini BNC, DIN 1.0/2.3	1000Base-x, IEEE 802.3, (GbE), G.703 (E3/T3)	Coaxial	75	275	900
SFP-PWE1T1*** TDM to Ethernet pseudowire gateway	100BaseFX, IEEE 802.3 (FE), G.703 (E1/T1)	UTP, cat. 5	120 (E1) 100 (T1)	-	-

Notes:

* SFP-9F includes a LED indicator, along with an underside DIP switch which controls the autonegotiation mode. For more information, refer to the SFP-9F data sheet and installation and operation manual.

** With SFP-11 and SFP-12, a 135m range is attainable when using RG59 B/U (at 78 MHz, in accordance with the square root of frequency law).

*** Designed to work with RAD products only. An internal mechanism in these SFP units checks whether the hosting device is a RAD product.

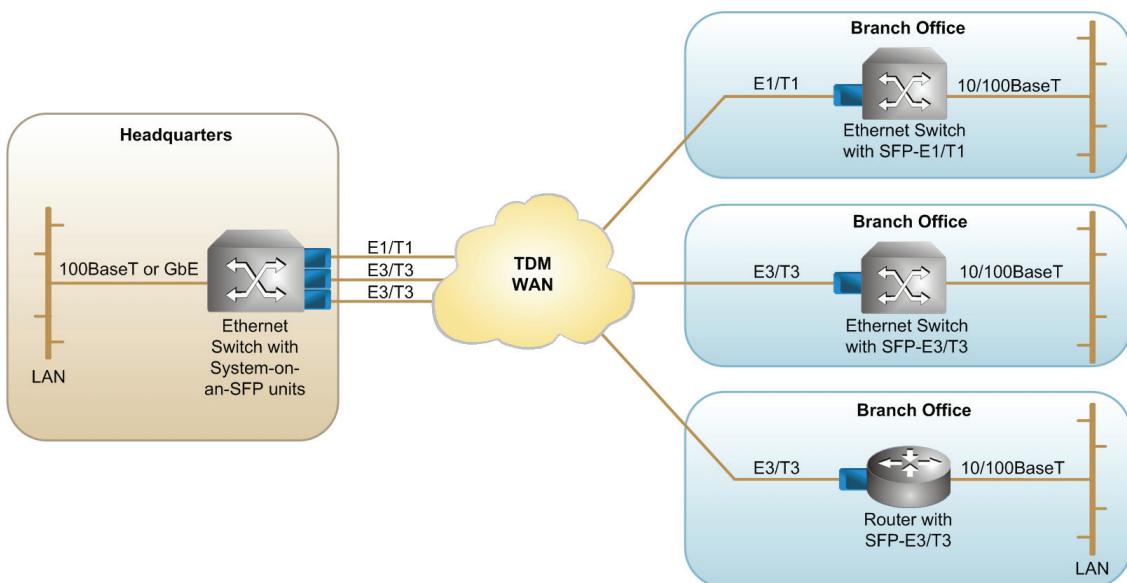


Figure 1. Providing Transparent LAN Services over Leased Lines

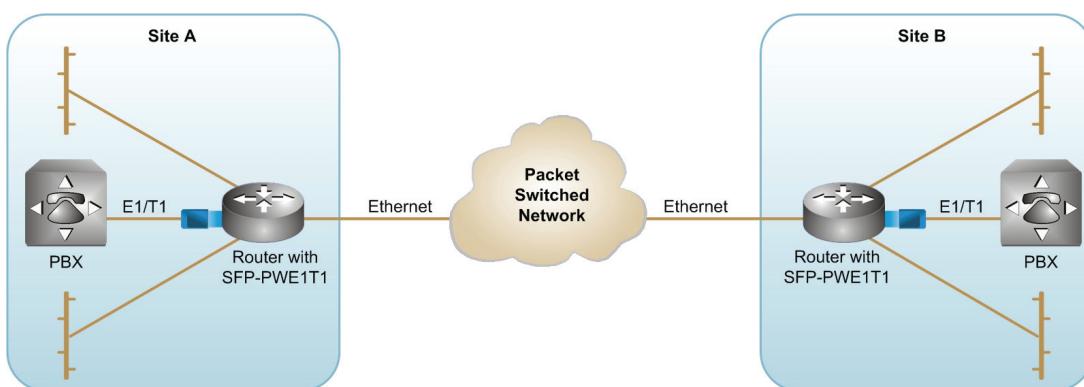


Figure 2. Delivering E1/T1 Services over a PSN

SFP Transceivers

Small Form-Factor Pluggable Transceivers

Ordering

To order an SFP unit, use its ordering name as listed in *Tables 1–3*.

Note: It is strongly recommended to order RAD products with original RAD SFPs installed. This will ensure that prior to shipping, RAD has performed comprehensive functional quality tests on the entire assembled unit, including the SFP devices. RAD cannot guarantee full compliance to product specifications for products using non-RAD SFPs.

SUPPLIED ACCESSORIES

CBL-MINIBNC-BNC

Two adapter cables for converting mini BNC connectors to regular BNC coaxial connectors (for SFP-11)

CBL-SMB-BNC/M

Two adapter cable for converting SMB connectors to regular BNC coaxial connectors (for SFP-12)

CLB-1023-BNC

Two adapter cable for converting mini BNC connectors to regular BNC coaxial connectors (for SFP-E3T3/FE and SFP-E3T3/GbE)

International Headquarters
24 Raoul Wallenberg Street
Tel Aviv 69719, Israel
Tel. 972-3-6458181
Fax 972-3-6498250, 6474436
E-mail market@rad.com

North America Headquarters
900 Corporate Drive
Mahwah, NJ 07430, USA
Tel. 201-5291100
Toll free 1-800-4447234
Fax 201-5295777
E-mail market@radusa.com

www.rad.com



data communications
The Access Company