

# CS-T9C-A0-BG

Smart Siren



## Introduction

EZVIZ products have been designed for your entertainment, communication and security. When you install the EZVIZ APP on your smartphone or tablet, EZVIZ devices will be connected to the cloud via their QR code and will immediately be online. With EZVIZ, you can talk to your loved ones, watch your child's progress when you are away, keep an eye on your home, interact with your four-legged friends and prevent household accidents.

## Main Features



90~105dB Adjustable Alarm sound



5~180s Adjustable Alarm Duration



Tamper Alarm



Anti-moving Alarm



Weatherproof Design



-30°C to +60°C




Energy-Saving Design with Long Battery Life



EZVIZ Connect

## Dimension

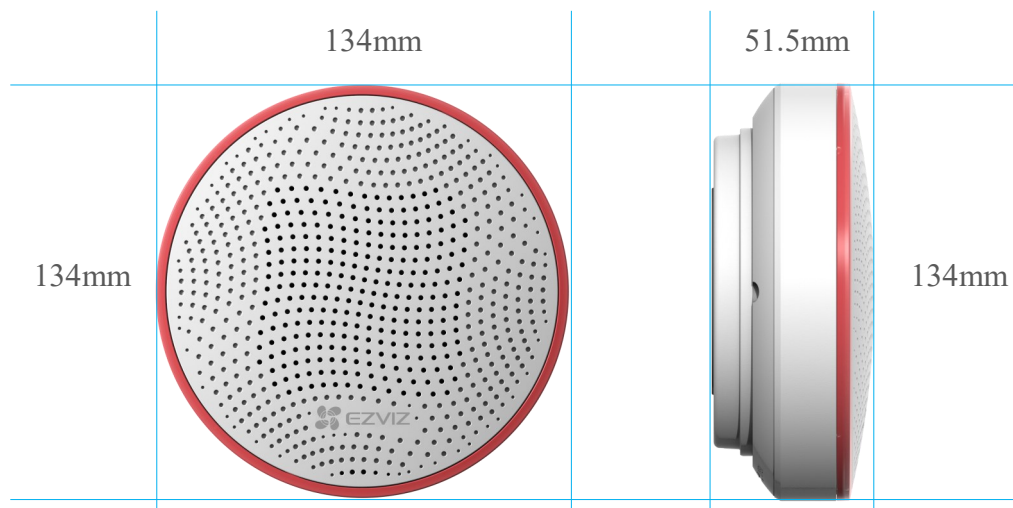

# Specifications

<b>Model</b>	<b>CS-T9C-A0-BG</b>
<b>Sensor Type</b>	Single photoelectric smoke sensor
<b>Certification</b>	CE,UKCA, RoHS, REATCH,WEEE
<b>Alarm Volume (±2dB)</b>	High 105dB
	Mid 98dB (Default)
	Low 90dB
	Mute
<b>Alarm Duration</b>	5s (Default),10s,20s,30s,60s,180s
<b>Alarm Test</b>	Support
<b>Signal Test</b>	Support
<b>Alarm Indicator Light</b>	Support, Off by default
<b>Anti-moving Alarm</b>	Support, Off by default
<b>Anti-tamper Alarm</b>	Support, Off by default
<b>Arm/Disarm Warning Tone</b>	Support, Off by default
<b>App Notification</b>	Support
<b>Smart Integration</b>	Support, EZVIZ connect
<b>Share</b>	Support, Max. 5 people, Log and message
<b>Disarm</b>	Support, by App / T3C
<b>Power Supply</b>	Recommend: CR123A*4
	Alternatives: DC12V external power supply
<b>Battery Service Life</b>	For single alarm duration at 5s, 12 mins(144 times) alarms can be operated annually. · High(105dB) 5.5 years · Medium(98dB) 6.5 years · Low(90dB) 7 years Actual battery service life may be changed in terms of the alarm duration you set and alarm times.
<b>Standby Current</b>	Static Current≤60μA (Battery) , Static Current≤1mA (DC12V)
<b>Working Current</b>	Alarm Current≤1.2A (Battery) , Alarm Current≤0.5A (DC12V)
<b>Protocol</b>	ZigBee 3.0
<b>Radio Frequency</b>	2.4 GHz
<b>Communication Distance</b>	The open environment is greater than 200m
<b>Operating Temperature</b>	-30°C ~ 60°C
<b>IP Grade</b>	IP54
<b>Installation</b>	Wall installation, expansion screw installation
<b>Size</b>	Φ 134 mm x 51.5 mm
<b>Weight</b>	437.54g

# Installation Diagram

- ◆ The location of the siren depends on its remoteness from the gateway, and obstacles hindering the radio signal transmission: walls, floors, large objects.
- ◆ For more installation suggestions, please refer to the following figure.

