



UPS PoE Injector Installation Guide

WI-PS302G-UPS


Package Content

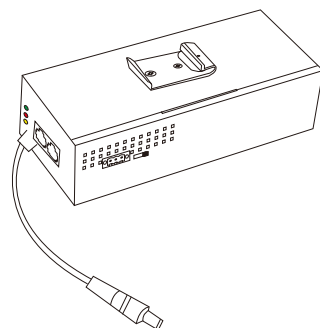

1x WI-PS302G-UPS Device



1x AC Power Cord




1x Battery Cord



1x Quick Installation Guide

Board Diagram

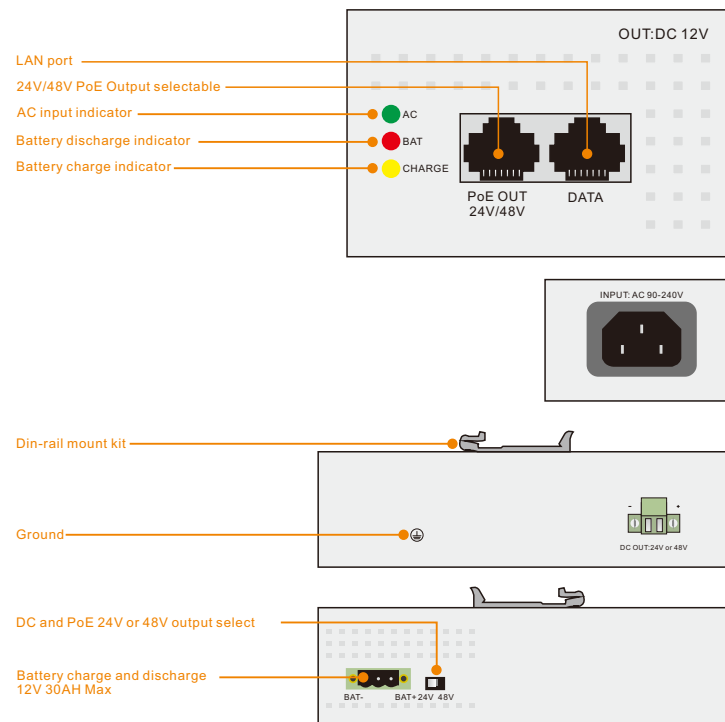


LED Indicator	Status	Description
AC	on	AC power input
AC	off	No AC power
BAT	solid red	Battery is charging to the switch
BAT	Blink	Battery power is running out
BAT	Solid amber	Battery is fully charged or AC power input
CHARGE	Off	Battery is charging

Hardware Installation

WI-PS302G-UPS is a versatile 2-port PoE Switch with the functions of DC 12V powered PoE switch and UPS PoE switch. The following section describes the two installations of WI-PS302G-UPS. Before connecting any network device to the WI-PS302G-UPS, read read this chapter carefully.

Note: WI-PS302G-UPS must be grounded.
Power on device after completing all setting.

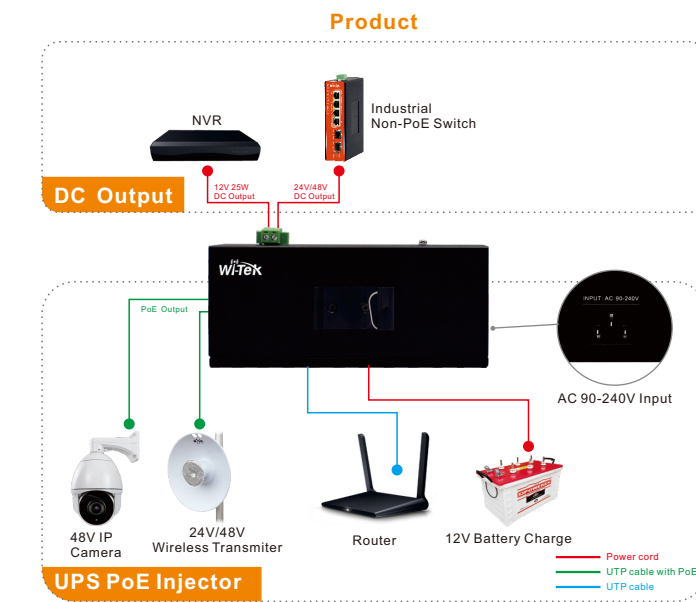

DC 12V powered PoE switch
Step 1: Connect a DC12V lead acid or lithium battery or solar panel to power up the WI-PS302G-UPS via battery terminal.

As a UPS PoE switch:
Step 1: Connect AC 90-240V power cord to power up the WI-PS302G-UPS. Connect a 12V lead acid or lithium battery to the battery terminal as a backup power.
Step 2: Select the PoE out 24V or 48V based on your PoE Powered Devices via the DIP Switch.
Step 3: Connect 10/100/1000Mbps devices to the data port, such as router...
Step 4: For the DC OUT 24V or 48V terminal, you can connect a non-PoE Industrial switch.
Step 5: Install WI-PS302G-UPS as your need, Din-rail mount or wall mount.

Installation

Caution

Please pull out the power plug before installing or moving the switch. Grounding and anti-lightening can greatly increase the protection level of the switch. please connect the grounding terminal to the earth area by using at least wire 20.

1. Din-rail Installation



2. Wall Mount Installation



Warranty Card

Username	
Address	
Telephone No.	
Purchase Shop	
Purchase Address	
Product Model No.	
Purchase Time	
Serial No.	
Dealer Signature	

- If the product defects within three months after purchase, we will provide you a new product of the same model.
- If the product defects within the three-year warranty period, we will provide the professional maintenance service.
- Proof of purchase and a complete product serial number are required to receive any services guaranteed as part of the limited warranty.
- Any other defects that are not caused by workmanship or product quality, such as natural disaster, water damage, extreme thermal or environmental conditions, sticker damaged, warranty card losing will disqualify the product from limited warranty.



Technical Support



Cloud Management



Company Website

Wireless-Tek Technology Limited
Address: Biaofang Technology Building 402, Bao'an street,
Baoan District, Shenzhen City, Guangdong, China
Website: www.wireless-tek.com
Tel: 86-0755-32811290
Email: sales@wireless-tek.com
Technical Support: tech@wireless-tek.com