


Wiring the ACP 200BWM

Two options (240VAC - Line to Neutral) or (240V Line to Line on a 120/240V)

Line to Neutral Protection using the ACP 200BWM:

- Connect the source 240Vac phase wire to the terminal marked L1.
- Connect the source neutral to the terminal L2/N.
- Terminales marked NC are not used.
- Conecte el cable de fase de fuente de 240 VCA a la terminal marcada L1.
- Conecte el neutro fuente al terminal L2 / N.
- Terminales marcados NC no se utilizan.

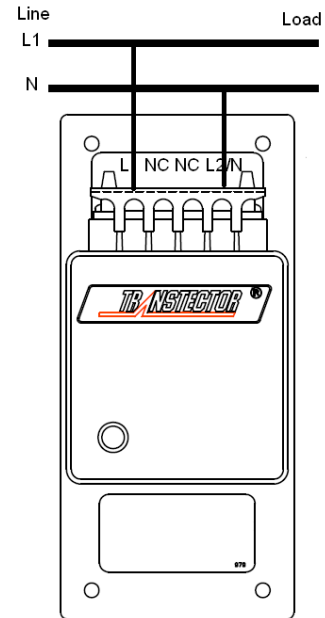

Line to Line Protection using the ACP 200BWM:

- Connect the source 120Vac phase wire to the terminal marked L1.
- Connect a second 120Vac phase wire to the terminal marked L2/N.
- Terminales marked NC are not used.
- Conecte el cable fuente de 120Vac a la terminal marcada L1.
- Conecte un segundo cable phase de 120 VCA al terminal marcado L2 / N.
- Terminales marcados NC no se utilizan.

