


The battery cabinet ensures extended system runtime during power outages


Designed for data center and critical applications, the External Battery Cabinet (EBC) can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery cabinets come with hardwire terminal block to allow for adding multiple EBCs, and built-in DC-rated circuit breaker to provide overload protection. The sealed lead-acid batteries used within the EBCs are stable and safe, which ensure the power system's reliable performance.


SERIES FEATURES

- Tower Form Factor
- Sealed Lead-acid Batteries

- EBM Expansion Capability
- Metal Housing



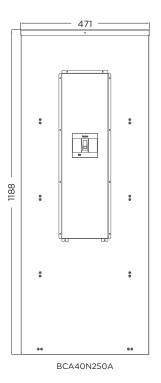

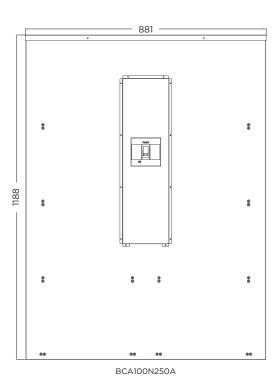

TECHNICAL SPECIFICATIONS

Model Name	BCA20N250A	BCA40N250A	BCA100N250A
General			
Nominal Output Voltage (Vdc)	240		
Battery			
Battery Type	Sealed Lead-acid		
Battery Quantity (pcs)	40		
Single Battery Voltage (V)	12		
Single Battery Capacity (AH)	20	40	100
Built-in Charger	No		
Expansion Ready	Yes		
Compatible UPS	SMX KA Series, HSTP3T K Series		
Physical			
Form Factor	Tower		
Physical Size			
Dimensions (WxHxD) (mm.)	471 x 610 x 951	471 x 1188 x 951	881 x 1188 x 951
Weight (kg.)	32	60	98
Environmental			
Operating Temperature (°C)	0 - 40		
Operating Relative Humidity (Non-condensing) (%)	0 - 95		
All specifications are subject to change without	notice		

#All specifications are subject to change without notice.

