

ENTRY-LEVEL POWER DISTRIBUTION

Provides reliable power distribution for connected equipment


Ideal for server room and IT applications, the Basic PDU Series is a power distribution device that delivers electricity from a single source to multiple devices. The products feature overload protection, external site ground pin, industrial-grade metal housing, adjustable mounting brackets, long input power cord, and cord retention tray.

SERIES FEATURES


- Industrial-grade Metal Housing
- Cord Retention Tray

PRODUCT CALLOUTS

- 1 . AC Power Cord
- 2 . AC Outlets
- 3 . Lighted On/Off Switch

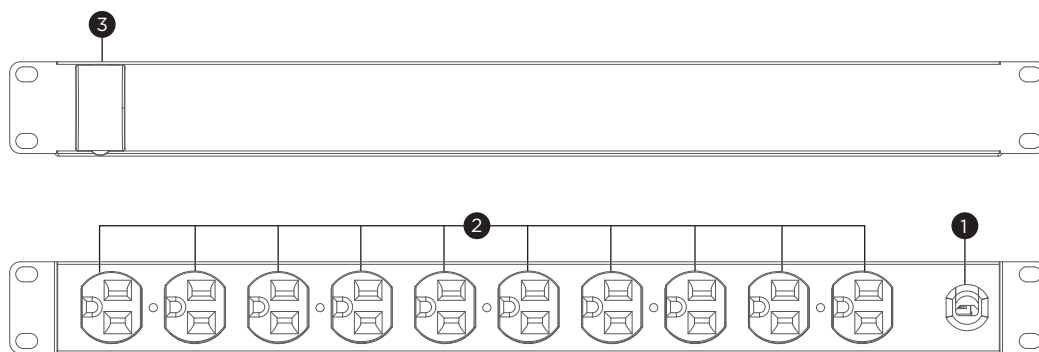

CPS-1215RM

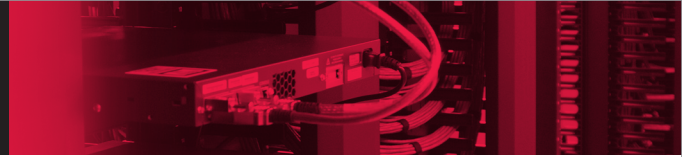

TECHNICAL SPECIFICATIONS

Model Name	CPS-1215RM
Input	
Nominal Input Voltage (Vac)	100 - 125
Input Frequency (Hz)	60
Maximum Input Current (A)	15(UL)
Input Connector Type	NEMA 5-15P x 1
Power Cord Length (m.)	4.5
Output	
Over Current Protection (Each Bank) (A)	15
Outlet(s) - Total	10
Outlet(s) - Rear	10
Outlet Type	NEMA 5-15R x 10
Physical	
Installed Rack Height (U)	1
Cord Retention Tray	Yes
Physical Size	
Dimensions (WxHxD) (mm.)	483 x 44 x 96
Weight (kg.)	2.27
Environmental	
Operating Temperature (°C)	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 95
Certifications	
Certifications*	UL
RoHS	Yes

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
 #All specifications are subject to change without notice.