


ENS-PIGTAILMMLC

Pigtail, OM3, LC/UPC, Simplex, Aqua.

Suitable Applications: Data Centers, Main Equipment Rooms and Telecommunications Rooms

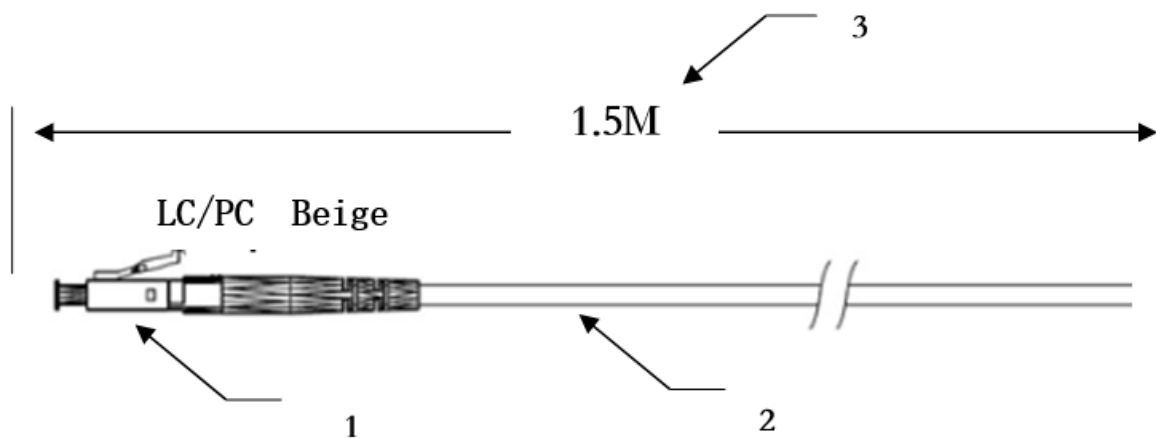

Specification:

1.Connector Type: LC/UPC Pigtail

2.Fiber Type:

Wire Type: $\Phi 0.9\text{mm}$, OM3

Coating Material : LSZH

COLOR : Aqua

Wire Length:1.5M

3.Performance :

1.Insertion Loss: $\leq 0.3\text{dB}$

2.Return Loss: UPC $\geq 35\text{dB}$

3.Extensibility: $-0.05\mu\text{m} < H < +0.05\mu\text{m}$

4.Durability: ≥ 1000 times

5.Operation Temperature: -20°C to $+60^{\circ}\text{C}$

6.Storage Temperature: -20°C to $+60^{\circ}\text{C}$

7.Industry standard:TA-NWT-001209