

NVR-E2-P



Key Features


- Support Ultra 265/H.265/H.264 video formats
- 4/8-channel input
- Plug & Play with 4/8 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA simultaneous output
- Up to 8MP resolution recording
- 1 SATA HDD up to 6TB
- Support cloud upgrade

Specifications

Model	NVR-104E2-P4	NVR-108E2-P8
Video/Audio Input		
IP Video Input	4-ch	8-ch
Network		
Incoming Bandwidth	40Mbps	50Mbps
Outgoing Bandwidth	40Mbps	40Mbps
Remote Users	128	
Protocols	P2P, UPnP, DHCP	
Video/Audio Output		
HDMI/VGA Output	HDMI: 3840x2160/30Hz , 1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
Audio Output	1-ch, RCA	


Recording Resolution	8MP/5MP/4MP/3MP/1080P/960P/720P/960H/D1/2CIF/CIF	
Synchronous Playback	4-ch	8-ch
Corridor Mode Screen	3/4	3/4/5/7/9
Decoding		
Decoding format	Ultra 265/H.265/H.264	
Liveview/Playback	8MP/5MP/4MP/3MP/1080P/960P/720P/960H/D1/2CIF/CIF	
Capability	1 x 8MP@30, 1 x 5MP@30, 2 x 4MP@30, 4 x 3MP@25, 4 x 1080p@30, 8 x 720p@30	
Hard Disk		
SATA	1 SATA interface	
Capacity	up to 6TB for each disk	
External Interface		
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface	
USB Interface	Rear panel: 2 x USB2.0	
PoE		
Interface	4 RJ45 10M/100M self-adaptive Ethernet Interface	8 RJ45 10M/100M self-adaptive Ethernet Interface
Max Power	Max 30W for single port Max 54W in total	Max 30W for single port Max 75W in total
Supported Standard	IEEE 802.3at, IEEE 802.3af	
General		
Power Supply	48V DC Power Consumption: ≤9 W (without HDD)	52V DC Power Consumption: ≤9 W (without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)	
Dimensions (W×D×H)	260mm × 243mm × 46mm (10.2" × 9.6" × 1.8")	
Weight (without HDD)	≤1.2kg (2.65 lb)	

Dimensions

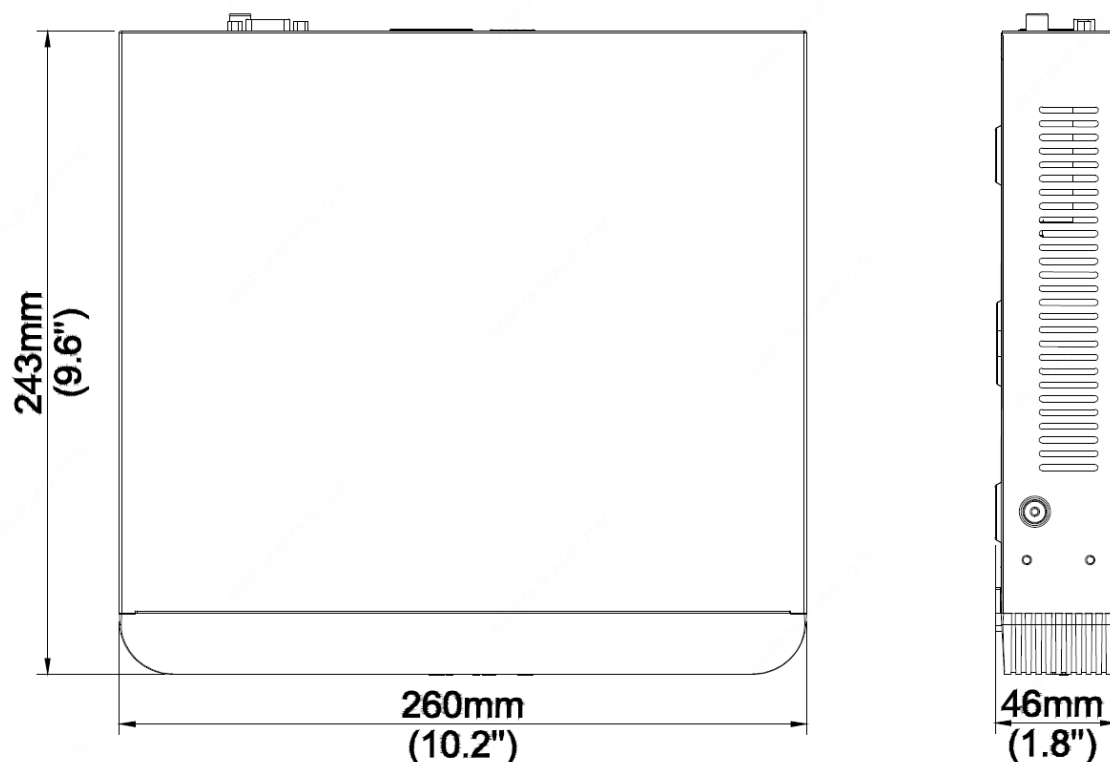

Rear Panel

Take NVR-104E2-P4 for example

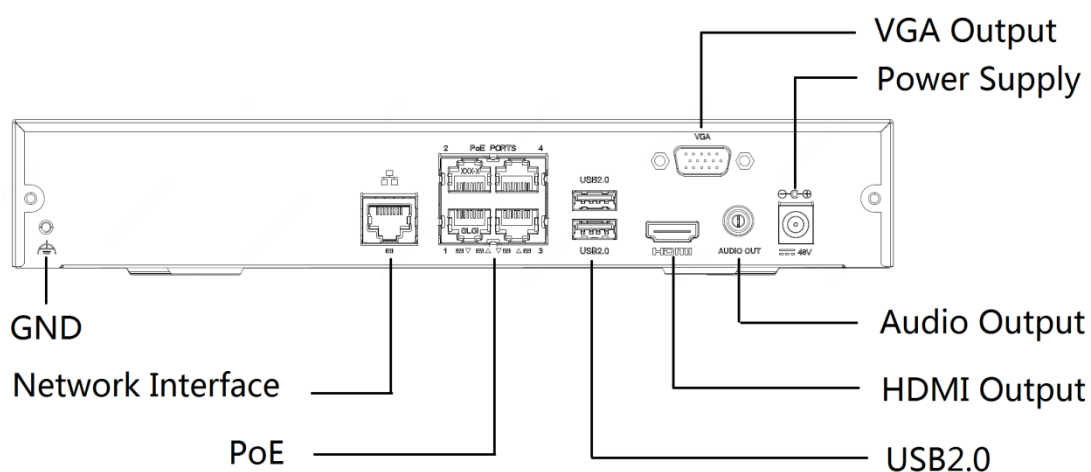

www.uniview.com/uniarch

©2021 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

2MP Fixed Dome Network Camera

IPC-T122-APF28(40)



Key Features

Optics

- Day/night functionality
- Smart IR, up to 30m (98ft) IR distance
- 2D/3D DNR (Digital Noise Reduction)
- Built-in Mic

Compression

- Ultra 265, H.265, H.264
- ROI (Region of Interest)

Network

- ONVIF Conformance

Structure

- Wide temperature range: -30°C ~ 60°C (-22°F ~ 140°F)
- Wide voltage range of $\pm 25\%$
- IP67
- 3-Axis


Specifications

	IPC-T122-APF28			IPC-T122-APF40		
Camera						
Sensor	1/2.8", progressive scan, CMOS					
Lens	2.8mm@F2.1			4.0mm@F2.1		
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)	
	2.8	43.4	17.4	8.7	4.3	
	4.0	62.1	24.8	12.4	6.2	
Angle of View (H)	106.7°			87.5		
Angle of View (V)	57.1°			46.3°		
Angle of View (O)	115.7°			92.4°		
Adjustment angle	Pan: 0° ~ 360°		Tilt: 0° ~ 80°		Rotate: 0° ~ 360°	
Shutter	Auto/Manual, 1 ~ 1/100000s					
Minimum Illumination	Colour: 0.02Lux (F2.1, AGC ON) 0Lux with IR					
Day/Night	IR-cut filter with auto switch (ICR)					
Digital noise reduction	2D/3D DNR					
S/N	>52dB					
IR Range	Up to 30m (98ft) IR range					
Defog	Digital Defog					
WDR	DWDR					
Audio						
Audio Compression	G.711					
Suppression	Supported					
Sampling Rate	8KHZ					
Video						
Video Compression	Ultra 265, H.265, H.264					
H.264 code profile	Baseline profile, Main profile, High profile					
Frame Rate	Main Stream: 1080P (1920*1080), Max 25fps; 720P (1280*720), Max 25fps; Sub Stream: D1 (720*576), Max 25fps; 640*360,Max 25fps; 2CIF(704*288), Max 25fps; CIF(352*288), Max 25fps;					
HLC	Supported					
BLC	Supported					
OSD	Up to 4 OSDs					
Privacy Mask	Up to 4 areas					
ROI	Up to 8 areas					
Motion Detection	Up to 4 areas					
Network						
Protocols	IPv4, IGMP, ICMP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, UPnP, HTTP, RTMP					
Compatible Integration	ONVIF (Profile S, Profile T), API					
Interface						
Network	10/100M Base-TX Ethernet					
Built-in Mic	Supported					

General

Power	DC 12V±25%, PoE
	Power consumption: Max 3.5W
Dimensions (Ø x H)	Ø118 x 97mm (Ø4.6" x 3.8")
Weight	0.25kg (0.55lb)
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Surge Protection	4KV
Ingress Protection	IP67
Reset Button	N/A

Dimensions

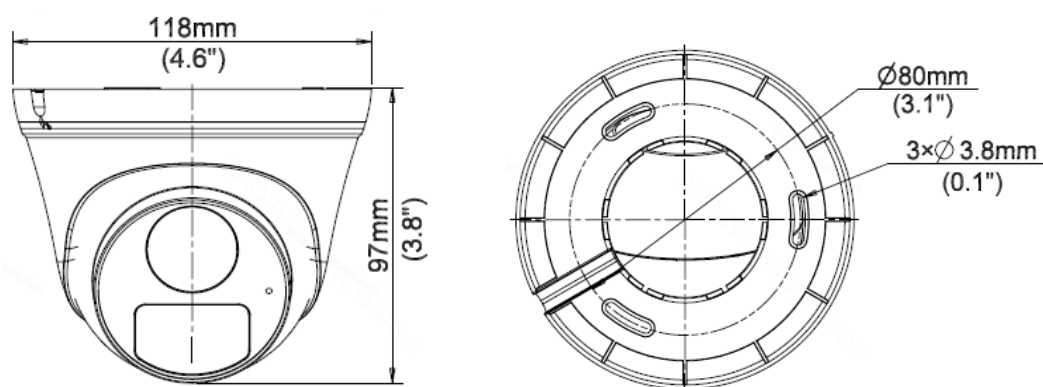

www.uniview.com/uniarch

©2021 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

ENS-IP18CAT6

El patchcord UTP ENSON ENS-IP18CAT6 es una solución viable para poder instalar cámaras IP, CCTV y redes en proyectos domésticos o de oficina, donde solo se requiera cablear sin hacer trabajo de ductilería.



Especificaciones

Tipo	Patchcord UTP
Categoría	CAT6
Conductores	8/4 pares
Calibre conductor	28 AWG/7 hilos
Material conductor	100% Cobre
Material forro	PVC
Color	Gris
Medida	18 metros
Conectores	RJ45

Blanco/Naranja 1	1 Blanco/Naranja
Naranja 2	2 Naranja
Blanco/Verde 3	3 Blanco/Verde
Verde 6	6 Verde
Azul 4	4 Azul
Blanco Azul 5	5 Blanco Azul
Blanco/Café 7	7 Blanco/Café
Café 8	8 Café

