Specifications

Model	UAC-B112-F28	UAC-B112-F40
Sensor		
Pixel	2MP	
Size	1/3"	
Minimum illumination	0.02 lux (F2.0, AGC ON) 0 lux (IR on)	
Lens		
Lens	2.8mm	4.0mm
Lens mount	M12	
Angle of view	H: 90.5° V: 49.6° D: 109.5°	H: 80.2° V: 40.7° D: 90.5°
Illuminator		
Illuminator	One IR illuminator	
Illumination distance	20m	
Lifetime	ˆ93/333 krxuv	
Video		
Resolution	1080P: 1920(H)×1080(V) 720P: 1280(H) ×720(V)	
Frame rate	TVI/AHD/CVI: 1080P@25fps(default), 1080P@30fps; 720P@25fps, 720P@30fps CVBS: PAL, NTSC	
Shutter time	PAL: 1/25s-1/50000s NTSC: 1/30s–1/50000s	
Image		
Exposure mode	4 modes: Global (default), BLC, HLC, DWDR	
Day/Night	3 modes: Auto (default), Day, Night	
Digital noise reduction	2D	
White balance	Two modes: Auto (default), Manual	
WDR	DWDR	
Smart IR	Support	
Flip	Supports 180° horizontal flip, 180° vertical flip	
Interface		
Power	5.5mm power interface	
Video output	BNC, supports TVI/AHD/CVI/CVBS	
Operating environment		
Temperature	-63 ł wr 93 ł+-55 ⌊ wr 473 ⌊,	
Humidity	v<8 (+UK/ qrq-condensing)	
Surge protection	4KV	
General		
Power	GF 45Y+°58 (,/ zlwk reverse polarity protection, Max 2.88W	
Mount	3D bracket supplied, surface mount (default), optional backbox, pole mount bracket	
Dimensions	142mm*63mm*65mm (L*W*H)	
Material	Plastic	
Weight	135g(0.30lb)	
OSD menu language	11 Languages	

	English, German, Spanish(Latin America), French, Italian, Japanese, Korean, Polish, Portuguese(Brazil), Russian, Turkish
Certification	
EMC	CE-EMC (EN 55032,EN 61000-3-3,EN IEC 61000-3-2,EN 55035) FCC (FCC 47 CFR part15 B)
Safety	CE-LVD (EN 62368-1)
Environment	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU)
Protection	IP67 (IEC 60529)

Dimensions

UAC-B112-F28(40)

Accessories

TR-JB05-A-IN	TR-UP06-B-IN	TR-UP06-C-IN	TR-A01-IN	TR-UC08-C
Junction Box	Pole Mount	Pole Mount	Waterproof joint	Corner mount

PWR-DC1201A-IND	PWR-DC1201A-UK, PWR-DC1201B-UK	PWR-DC1201A-US, PWR-DC1201B-US	PWR-DC1201A-EU, PWR-DC1201B-EU
Wall Plug-in IND Power Adapter	Wall Plug-in UK Power Adapter	Wall Plug-in US Power Adapter	Wall Plug-in EU Power Adapter

Mount	
TR-UP06-B-IN	TR-JB05-A-IN+TR-UP06-C-IN
TR-JB05-A-IN+TR-UC08-C	

Zhejiang Uniview Technologies Co., Ltd.

Building No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, Zhejiang Province, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

https://www.uniview.com

©2023 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

El accesorio para video vigilancia opcional para una instalación más limpia y profesional, estos accesorios son para la conexión de corriente y video de las cámaras HD. Este tipo de cableado facilita la interconexión de las cámaras con el DVR identificando perfectamente los conectores BNC y de Corriente.

El calibre 24 AWG, son ideales para aplicaciones de video HD para la interconexión de cámaras con los DVR.

- Cable siamés de alta calidad con núcleo de cobre macizo para tecnologías análogas, HD (AHD / CVI / TVI) y SDI.
- Cable pre-fabricado 100% cobre para una fácil instalación.
- El cable se puede acoplar hasta los 150M (BNC macho / macho y DC macho / hembra alimentación)
- Plug and Play listo para conectarse en HD 1080P / 720P en formato TVI, CVI, AHD. • Compatible con cámaras de cualquier tecnología y característica.
- Se recomienda su uso para evitar cortos en el cableado de la alimentación de los dispositivos de videovigilancia.
- Nos da la apariencia de una instalación limpia y profesional. • Conductores de alimentación de 2 hilos.
- Cable pre-ponchado para video y alimentación de 18mts.

Los conectores tipo pulpo nos permiten ampliar el número de equipos que podemos energizar con una sola fuente de alimentación, lo cual nos amplia nuestras posibilidades de mejorar la distribución de nuestros sistemas de video vigilancia, acceso, alarmas, etc.

Modelo	ENS-DC12	ENS-DC14	ENS-DC15	ENS-DC16	ENS-DC18
Conector de Entrada	1x 5.5x2.1 mm Hembra platinado en Niquel				
Conectres de Salida	2x 5.5x2.1mm Macho platinado en Niquel	4x 5.5x2.1mm Macho platinado en Niquel	5x 5.5x2.1mm Macho platinado en Niquel	6x 5.5x2.1mm Macho platinado en Niquel	8x 5.5x2.1mm Macho platinado en Niquel
Conductor	Entrada: 22AWG 100% Cobre - Salida: 26AWG 100% Cobre				
Forro	PVC color Negro				

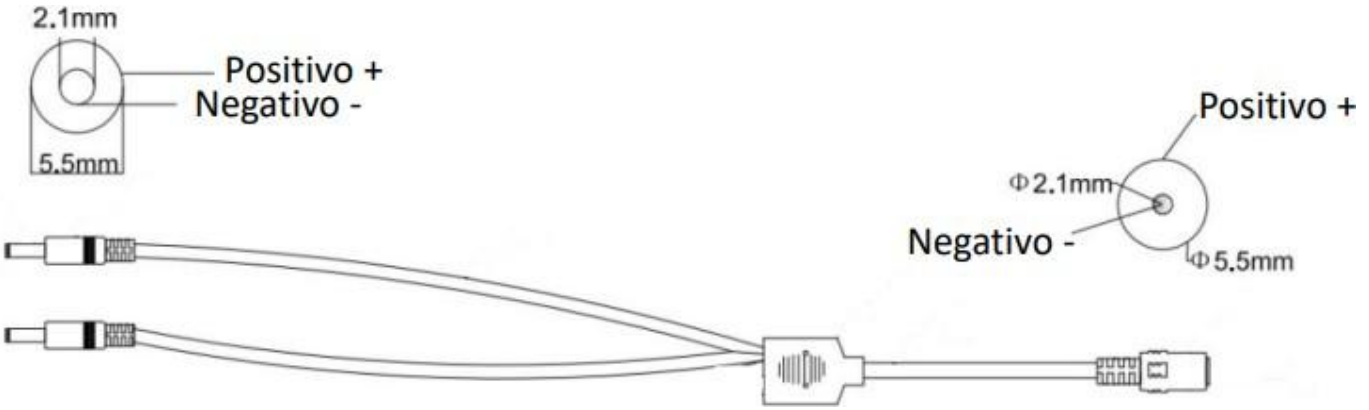

Uniview Technologies Co., Ltd.
Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)
Email: overseasbusiness@uniview.com; globalsupport@uniview.com
http://www.uniview.com
©2022 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.