


REV.	DESCRIPTION	ENG.	APPROVAL

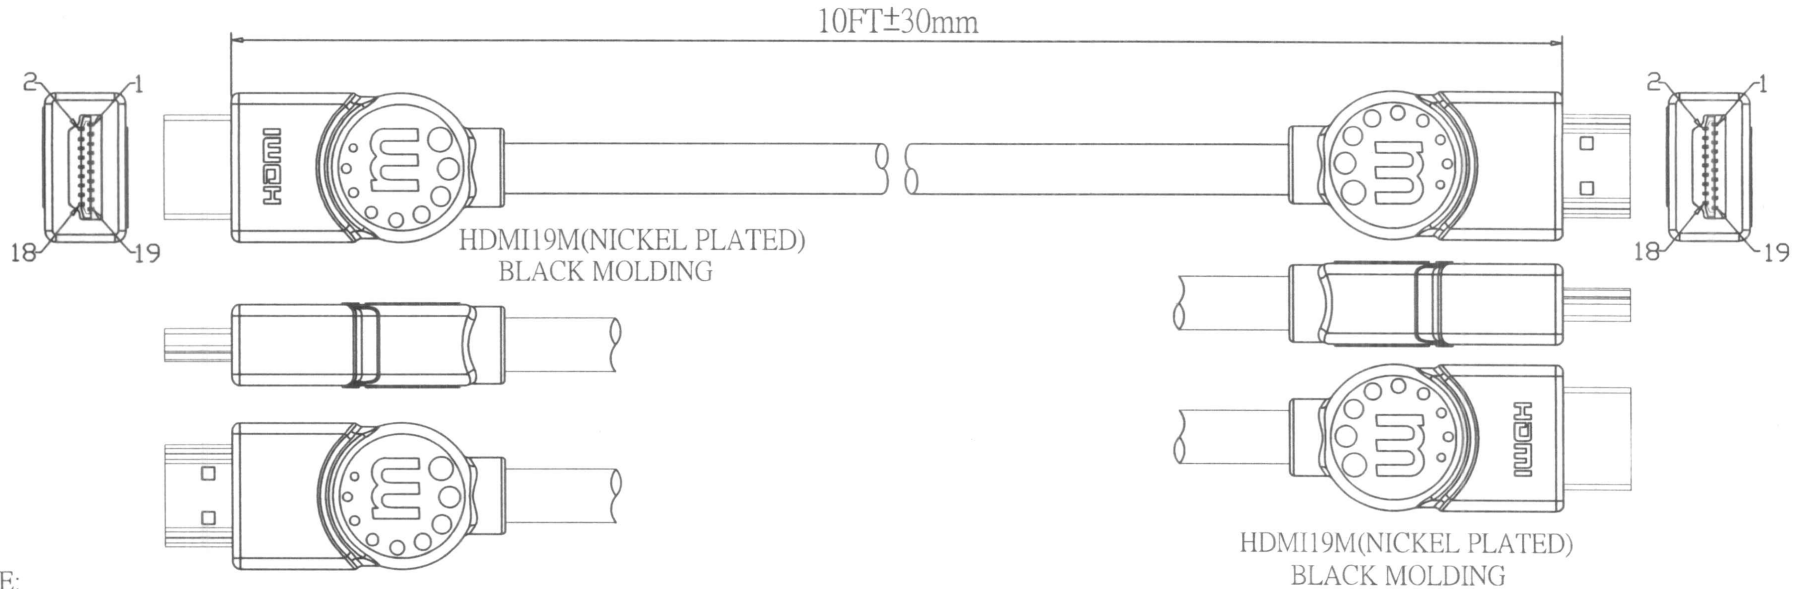

NOTE:

1. CABLE:UL20276 (28#*1P+D+AM+M)*5C+28#*4C+AM+B,OD=7.3mm,BLACK COLOR,PVC JACKET.(High Speed HDMI Cable with Ethernet,AM BRAID)

CABLE PRINT: www.manhattan-products.com

2. LENGTH:10FT

3. CONNECTOR:HDMI 19M*2PCS.(NICKEL PLATED,BLACK INSULATOR)

4. MOLD:BLACK MOLDING

5. CONTACTS:

HDMI19M	3	1	2	6	4	5	9	7	8	12	10	11	14	19	17	13	15	16	18	64
HDMI19M	3 1		2	6 4		5	9 7		8	12 10		11	14 19		17	13	15	16	18	64
	TP		GND	TP		GND	TP		GND	TP		GND	TP		GND					BRAID

6. OPEN/SHORT TEST:100% TEST.
INSULATION: MIN. 5M.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

UNLESS OTHERWISE SPECIFIED:DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE:±1°

TOLERANCE(INCH)	TOLERANCE(MM)
x	±0.5mm
x.x	±0.20mm
x.xx	±0.15mm
x.xxx	±0.10mm



TITLE:		APPD			
		Check			
CUSTOMER:		Drawer			Date 2013, 5, 17
CUSTOMER P/N:		Unit	mm	Projection	⊕
ICT P/N: 323222		Scale	1:1	Size	A4
DWG.NO:		Sheet	1 of	REV.	A