

## AE-DC2928-N6



- 1080P front and 1080P rear dual high definition digital lens.
- 1080P video from the front camera and 720P video from the rear camera.
- Full touch screen, IPS screen viewing angle can reach to 178°.
- Support built-in MIC and speaker for audio in and out.
- GPS module is optional to support speed display and route tracking playback.
- Supports TF card with the storage up to 128 GB. Seamless storage without missing seconds.
- Built-in G-sensor. When the vehicle collides or vibrates severely, the emergency recording will be triggered, and the emergency recording backup will be locked.
- The viewing angle can be adjusted up and down by 15°.
- Supports voice recognition. "Open the screen", "Close the screen", "Show the way forward", "Show the way backward", "Display all", "Take the photo", "Start to record", "Finish recording" and "Lock the video" can be recognized.
- Convenient installation, simple operation, recording after plugging, and automatic recording after power on.
- Reversing parking assist.
- Parking monitoring. (Optional Fuse Box)

## ▪ Specification


Model		AE-DC2928-N6	
Camera	Image Sensor	GC2053	
	Angle Adjustment	adjustable up and down, left and right angles 15°	
	Power-off Memory	YES	
Lens	Lens Type	G+P	
	Aperture	Front camera: F2.0	
Wi-Fi	Frequency Range	NO	
	Channel Bandwidth	NO	
Image	Wide Dynamic Range (WDR)	NO	
	Image Enhancement	NO	
	HDR	NO	
Interface	Built-in Microphone	YES	
	Built-in Speaker	YES	
General	GPS	YES	
	WiFi	NO	
	Wi-Fi Support	NO	
	Resolution	Front: 1080P (1920*1080) Rear: 1080P (1920*1080)	video: 1080p (1920*1080) video: 720p (1280*720)
	Max. Resolution	Front: 1080P (1920*1080) Rear: 1080P (1920*1080)	video: 1080p (1920*1080) video: 720p (1280*720)
	Video Compression	none	
	FOV	Front camera: 123° (D), 103° (H), 54° (V) Rear camera: 124° (D), 111° (H), 59° (V)	
	Camera Dimension	250mm x 70mm x 20mm (9.84" x 2.75" x 0.78")	
	Camera Weight	342g (0.75 lb.)	
	Software Reset	YES	
	Online	YES	

	Upgrade	
	Power Consumption and Current	Approx. 5W
	Power Supply	5V DC, 2A
	Power Interface	Mini-USB
	Working temperature	0 °C to 45 °C (32 °F to 113 °F)
	Working humidity	20% to 70%
	Storage	TF card, Max. 128 GB
	Display	9.35-inch 720P, (1280*320)
	OSD	Display operation menu
	Image format	JPEG
	Local Storage	NO
	ADAS	NO
	Speech recognition	YES

## ▪ Available Model

AE-DC2928-N6(海外标配),AE-DC2928-N6(海外标配)(降压线),AE-DC2928-N6(EVO)(国内标配)(经销),

## ▪ Dimension

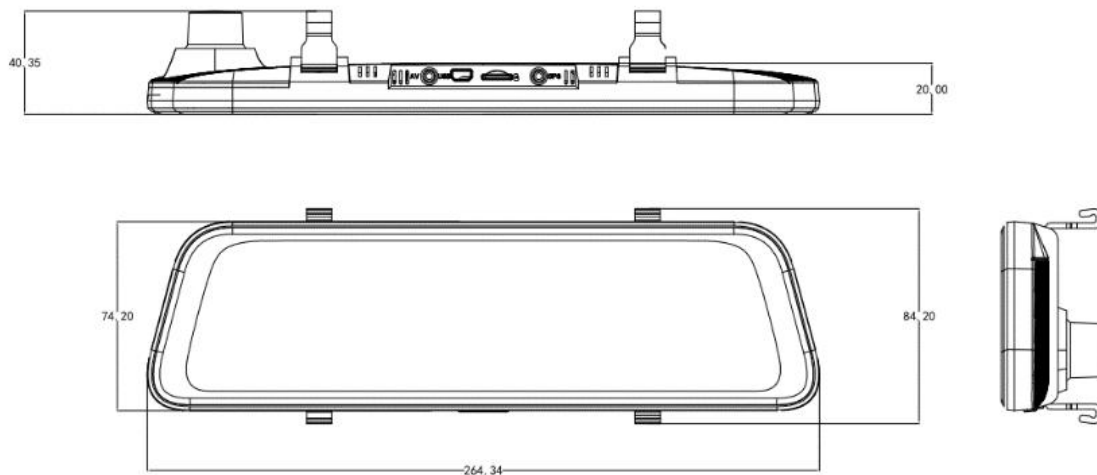

▪ **Accessory**

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.

[Hikvision](#)[HikvisionHQ](#)[HikvisionHQ](#)[Hikvision\\_Global](#)[Hikvision  
Corporate Channel](#)[hikvisionhq](#)