

AE-MD5043-SD Series Mobile Video Recorder

AE-MD5043-SD series DVR is designed for vehicle video and audio management using embedded Linux operating system. It supports the mixed access of HDTVI, AHD and CVBS cameras in HIK-wiring-sequence, with video and audio encoding/decoding, 4G wireless network transmission, satellite positioning, data secure storage, alarm triggering and other functions. It also provides channel selection and coding scheme, which especially suitable for the video and audio monitoring needs for scenes like taxis, muck trucks, logistics vehicles etc. To meet the needs of long - time video recording, it adopts dual SD card for storage.



▪ Application

The anti-corrosion performance level of AE-MD5043-SD series DVR is standard. It is suitable for regular scenarios only and might be damaged when exposed to corrosive environment. Description of anti-corrosion performance level:

| Anti-corrosion Performance | Application |
|----------------------------|--|
| Professional | Coastal areas, wharfs, ports, ships and chemical factories, etc. |
| High | Areas exposed to acid rain; areas over 1.24 miles (1 km) away from the coastline |
| Standard | Regular environment with little corrosion exposure |

▪ Key Feature

- Access of 4 HD TVI cameras with up to 1080p resolution.
- 2 SD cards accessible. Up to 256 GB capacity for each.
- User-friendly GUI providing easy and flexible operations.
- Built-in 4G module and Wi-Fi module providing flexible data transmission solutions.
- Built-in GPS module precisely positioning the vehicle via the satellite and recording the location information in the video stream.
- Information collection interfaces collecting driving information such as left/right turn, braking, reversing, etc.
- Specialized aviation connectors ensuring signal stability.
- Shutdown delay (0 h to 6 h) and 24-hour scheduled startup/shutdown.
- Build-in super-capacitor prevents the mobile DVR from damage caused by sudden power outage.
- Wide-range power input (+9 VDC to +32 VDC).
- Power-off protection prevents key data loss.
- Aluminum die-cast chassis with no fan design well adaptable to working environment.
- Software-based firewall supported.
- Support accessing via WEB browser.



▪ Specification

| Model | | AE-MD5043-SD |
|------------------------------|---|--|
| Video/Audio Input | Analog Camera | 4-ch HIK wiring sequence analog camera, Max. 1080P |
| | Two-way Audio | 1, integrated in EXT.DEV interface |
| Video/Audio Output | Video Output | Main output: 1, integrated in EXT.DEV interface |
| | Audio Output | 1 |
| Encoding/Decoding Parameters | Video Compression | H.264/H.265 |
| | Encoding Resolution | Main stream: 1080p/720p/WD1/4CIF Sub-stream: 4CIF/2CIF/CIF |
| | Frame Rate | <ul style="list-style-type: none"> ● PAL: 1 to 25fps@1080P; NTSC: 1 to 30 fps@1080P; ● PAL: 1 to 25 fps@720P; NTSC: 1 to 30 fps@720P; |
| | Audio Compression | G.711a/G.711u/G.722.1/G.726/AAC |
| | Stream Type | Video, video & audio |
| | Audio Bitrate | 16 Kbps |
| | Dual Stream | Supported |
| Storage | SD Card | 2 × SD card, up to 256 GB (not for baseline. Note the SD card capacity when ordering) |
| Wireless Network | 4G Dialing | 1 × 4G card slot, 1 × FAKRA antenna European Baseline: Supported region or country: <ul style="list-style-type: none"> ● Southeast Asia: Hong Kong China/Taiwan China/Indonesia/India/Thailand/Laos/Malaysia/Singapore/South Korea/Vietnam ● West Asia: Iran/Israel/UAE ● Europe: Germany/France/England/Italy/Belgium/Netherlands/Spain/Russia/Ukraine/Turkey ● Africa/Middle East: South Africa/Nigeria/Egypt Supported frequency band: <ul style="list-style-type: none"> ● LTE-FDD: B1/B3/B5/B7/B8/B20 ● LTE-TDD: B38/B40/B41 ● UMTS/HSDPA/HSPA+: B1/B5/B8 ● GSM/GPRS/EDGE: 900/1800MHz American Baseline: Supported region or country: <ul style="list-style-type: none"> ● Southeast Asia: Hong Kong China/Taiwan China/Indonesia/India/Thailand/Laos/Malaysia/Singapore/South Korea/Vietnam ● West Asia: Iran/Israel/UAE ● Oceania: Australia/New Zealand plus Taiwan ● South America: Brazil/Argentina/Chile/Peru/Colombia Supported frequency band: <ul style="list-style-type: none"> ● TE-FDD: B1/B2/B3/B4/B5/B7/B8/B28/B66 ● LTE-TDD: B40 ● UMTS/HSDPA/HSPA+: B1/B2/B5/B8 ● GSM/GPRS/EDGE: 850/900/1800/1900MHz |
| | Wi-Fi | WI&WI58 module: 1 × FAKRA antenna, 1 × wifi SMA antenna |
| Positioning | GNSS (Global Navigation Satellite System) | GPS (Global Positioning System) & BD (BeiDou Navigation Satellite System), 1 × FAKRA antenna |
| External Interface | Network Interface | Front panel :1 × 10M/100M RJ45 |
| | Serial Port | 1 × RS-232, 1 × RS-485 (integrated in EXT.DEV interface) |

| | | |
|---------|--|---|
| General | USB Interface | Front panel: 1 × USB 2.0 |
| | Sensor-in | 4 high/low level signal inputs |
| | Alarm Input | 4 high/low level signal inputs, 1 pulse signal input, 1 BUTTON input |
| | Alarm Output | 2 relay signal outputs |
| | Operating Method | Mouse, IR remote control, Web control |
| | G-sensor | Built-in |
| | Power Supply | +9 to +32 VDC |
| | Consumption | <ul style="list-style-type: none"> ● Standby: ≤ 0.5 W ● Full load: ≤ 45 W Note: Without peripheral and storage media ≤ 20 W |
| | Working Temperature | -20 °C to +60 °C (-4 °F to +140°F) |
| | Working Humidity | 10% to 95% |
| | Device Dimension (W × D × H) | 184 × 134.4 × 44 mm (7.2 × 5.29 × 1.73 inch) |
| | Package Dimension (W × D × H) | 250×210×160mm (9.84 ×8.27 ×6.30 inch) |
| | Device Weight (Without Storage Media) | 0.65 kg (1.43 lb) |
| | Package Weight (Without Storage Media) | 1.382 kg (3.047 lb) |

▪ Available Model


AE-MD5043-SD

AE-MD5043-SD/GLF, (supports 4G dialing)

AE-MD5043-SD/GLF/WI58, (supports 4G dialing , 2.4G Wi-Fi and 5.8G Wi-Fi)


▪ Physical Interface

▪ Front Panel

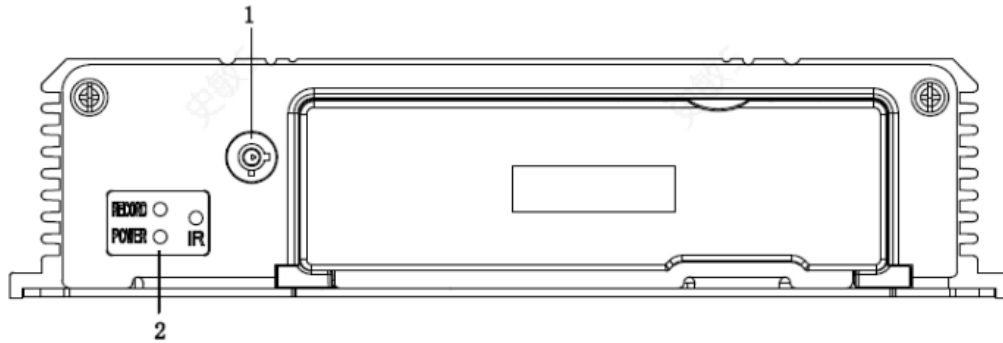








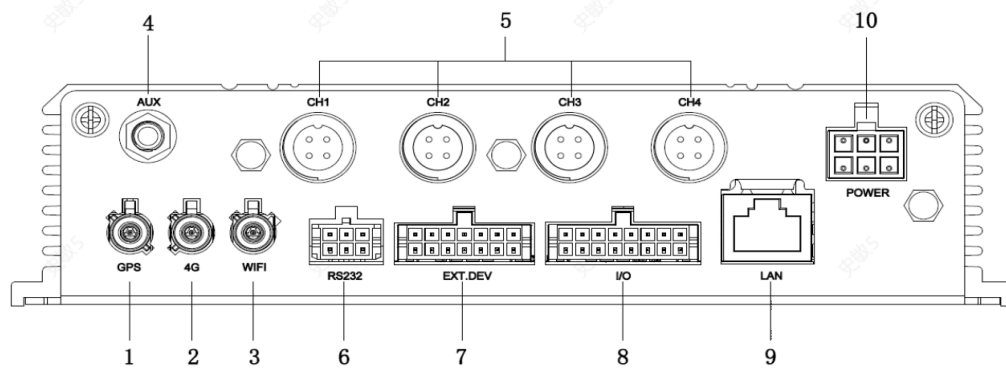

| No. | Name | No. | Name |
|-----|------------------|-----|----------------------------------|
| 1 | Front panel lock | 2 | PWR: Power indicator |
| | | | REC: Record indicator |
| | | | IR: Infrared receiving Indicator |

▪ Rear Panel

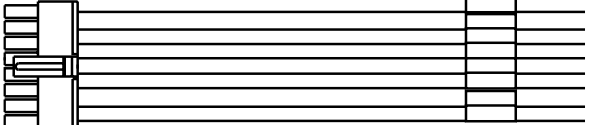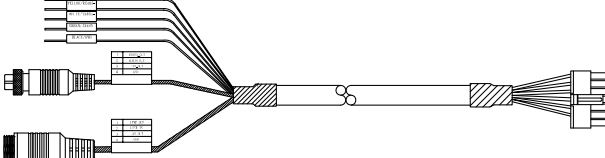


| No. | Name | No. | Name |
|-----|------------------------------|-----|---|
| 1 | GNSS antenna interface | 6 | RS-232 interface |
| 2 | 4G dialing antenna interface | 7 | RS-485 communication interface, two-way audio interface and CVBS video output |
| 3 | Wi-Fi antenna interface | 8 | Alarm in, alarm out and sensor-in |
| 4 | Wi-Fi antenna interface | 9 | Network interface |
| 5 | Analog camera input | 10 | Power supply |

▪ Packing List

| Description | Quantity | Picture | Note |
|---------------------------|----------|--|-----------------------------|
| Fuse | 1 |  | |
| Power cord | 1 |  | |
| Key | 1 |  | |
| Alarm line | 1 |  | |
| Extension cable | 1 |  | |
| 3G/4G antenna | 1 |  | For GLF module. |
| Wi-Fi antenna (2.4G&5.8G) | 1 |  | For WI&WI58 module. |
| Wi-Fi antenna (2.4G&5.8G) | 1 |  | For WI&WI58 module. |
| GPS antenna | 1 |  | For module with GPS module. |

Peripheral Connection

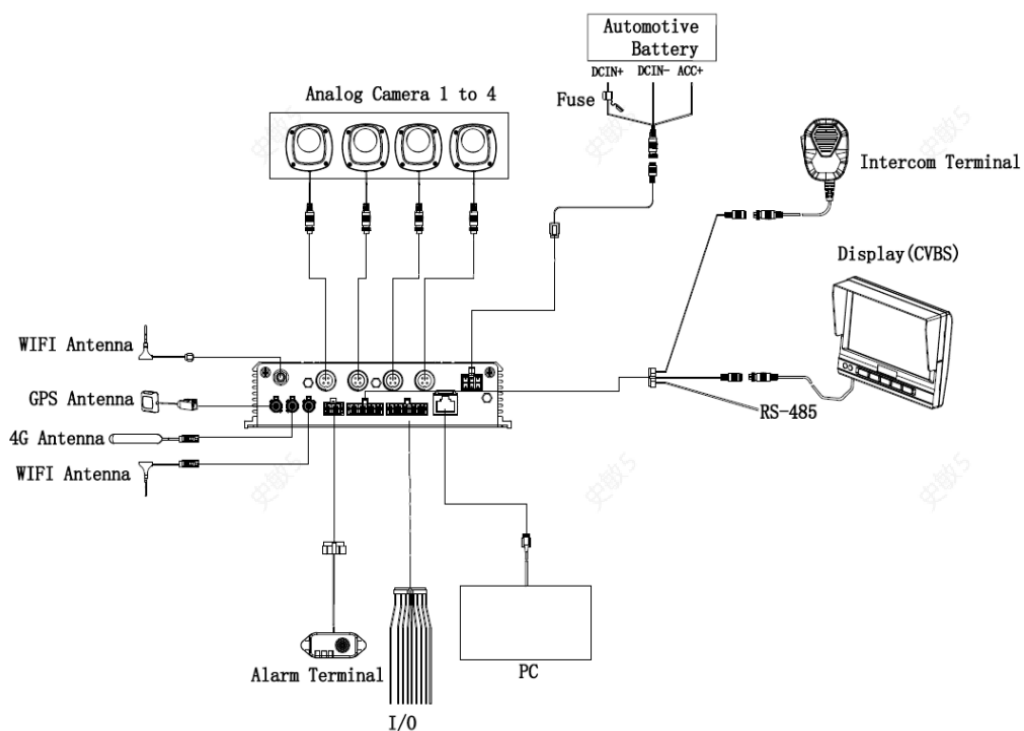

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com