


## AE-DF7351 (3.5m) Power Cable

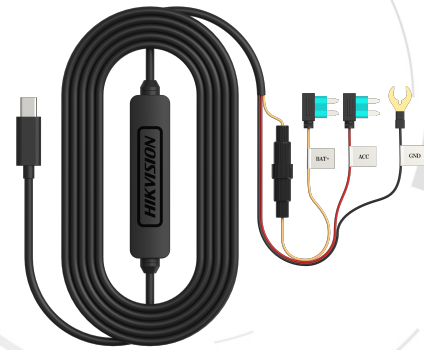

- Line length: Input line 1.3m, output line 2.1m
- Wire specification: VIN3-core 17/0.15 2C yellow black 7/0.15 1C red
- Input requirements: Rated input voltage DC: 10-36V Maximum input current  $\geq 1.5A$
- Type of output: No-load output voltage DC: 5.0V = 2A Max
- Low power protection 11.3V $\pm$ 0.2v

▪ **Specification**

| Interface           |                  |
|---------------------|------------------|
| Power Interface     | Micro USB        |
| General             |                  |
| Power Supply        | DC: 10-36V, 1.5A |
| Working temperature | -20 °C to 65 °C  |
| Working humidity    | 95%(Max)         |

▪ **Available Model**

AE-DF7351 (3.5m)

▪ **Accessory**



AE-DC5113-F6S



Hi-D32F6/G



AE-DC5013-F6PRO



AE-DC2015-B1



AE-DC5313-C6



AE-DC5313-C6PRO



AE-DC5013-F6



AE-DC8012-C8



Hi-D20B1



AE-DC5013-F6S

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq