

AE-MC0108-0.3
12M to BM4



- BM4F to 12M4B_B

▪ Specification


Interface	
Input interface type	BM4 FEMALE
Output interface type	12M4B_B
General	
Nominal voltage	30V
Working temperature	-40~85°C
Executive standard	NA
Application	BM4F to 12M4B_B Cable
Wire resistance	NA
Protection	NA
Material	INSULATION:PVC ; CONDUCTOR:TC
Rated current	≤1A
Cable length	300mm

*BM4F to 12M4B_B Cable

▪ Available Model

AE-MC0108-0.3(12M4B转BM4母)

▪ Dimension

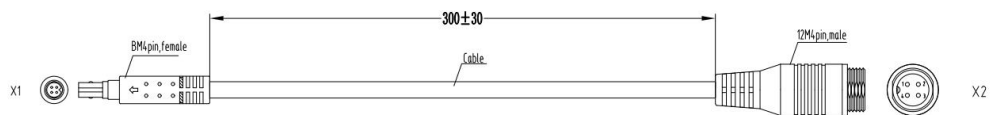

NOTES:


- 1、Operating Temperature -40~85°C
- 2、All materials meet RoHS require



X1	COLOR	X2	Signal
3	YELLOW	1	VIDEO
1	RED	3	POWER
2	S-DRAIN	4	GND
4	WHITE	2	AUDIO
2	BRAID	SHELL	SHELL

<1>		DESCRIPTION 修改记录	
NO.	REV	DESCRIPTION	修改记录
DESIGN		PART NAME: AE-MC0108-0.3 (12M4B to BM4_F)	PART NO:
APPROVED		DWG NO: DC11182_06	REV: STATE: HANGZHOU

- **Accessory**
- **Optional**

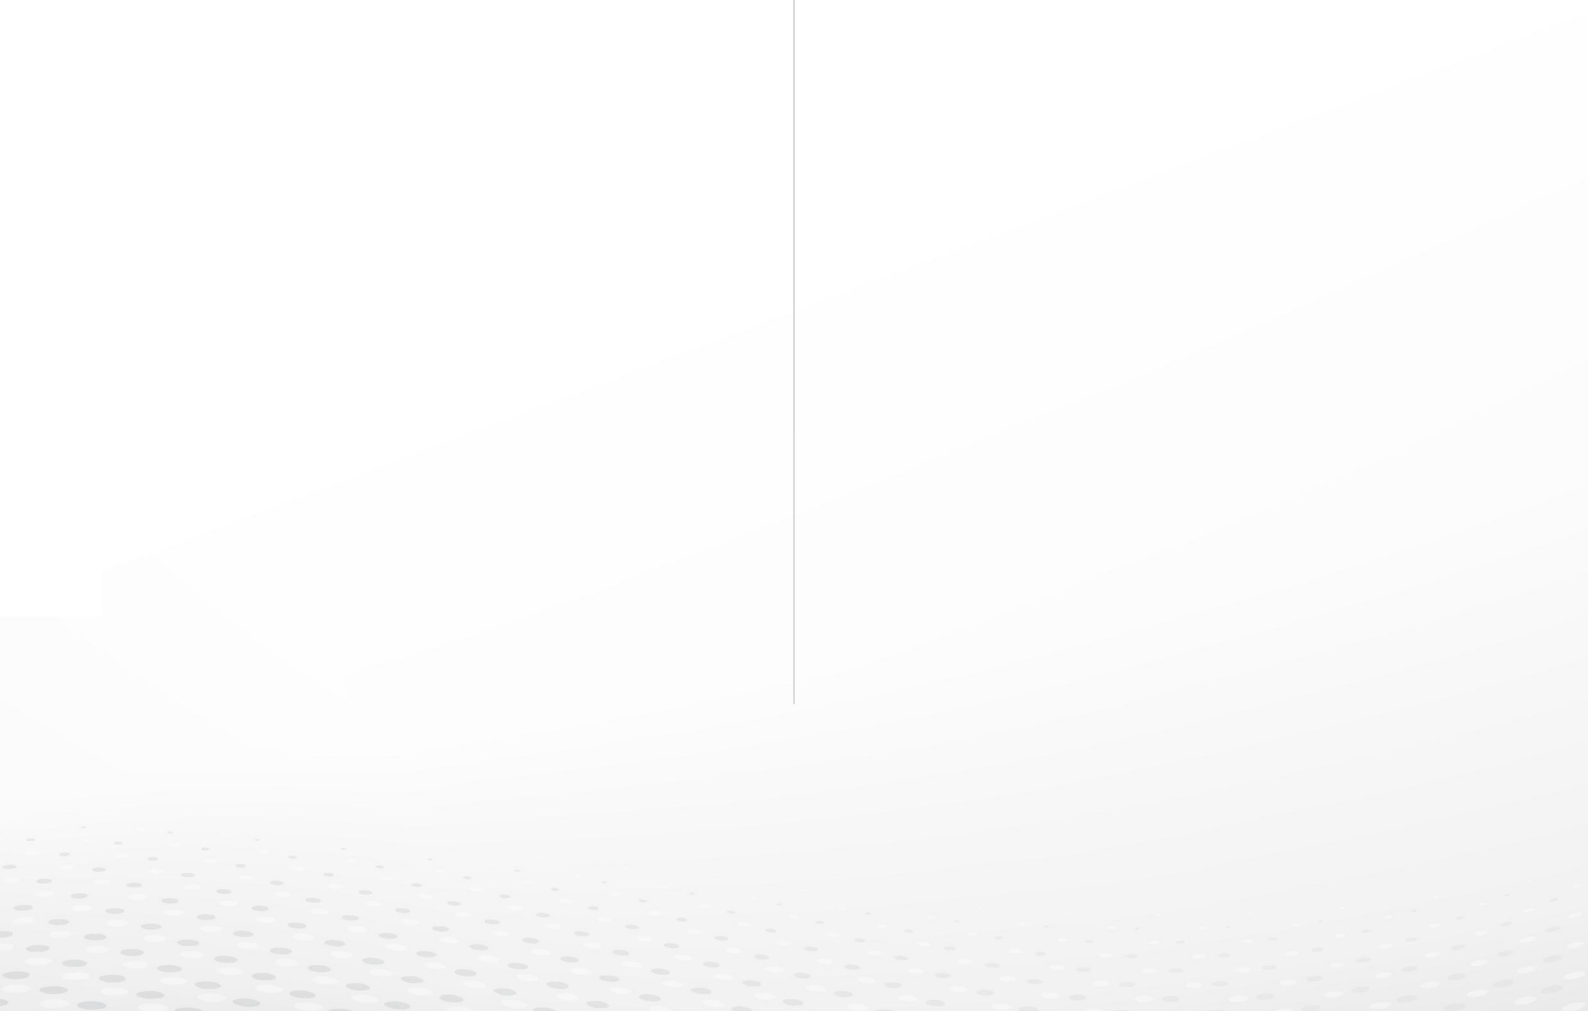



See Far, Go Further



www.hikvision.com
support@hikvision.com

