


ARK LV HUB -A1

- For parallel connection of ARK LV battery group
- ARK LV HUB-A1 configures maximum 8 group batteries



P O W E R
- I N G O
T O M O -
R R O W O

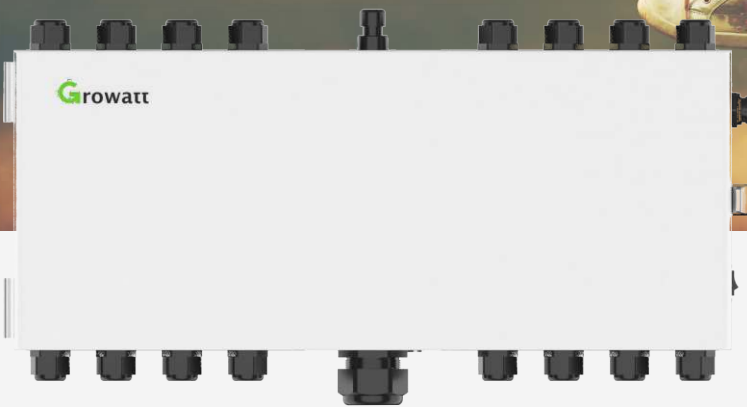

Datasheet	ARK LV HUB -A1
Operating voltage range	40-60Vdc
Communication interface	CAN/RS485
System Consumption	<2W
Dimensions (W / H / D)	600/140/250mm
Environmental Protection Rating	IP20
Weight	8kg
Warranty	5 years
Working temperature	-20~60°C
Storage temperature	-40~80°C
CAN	Baud rate: 500K (terminal resistance:120Ω)
RS485	(Only for PCS) Baud rate:9600/115200
USB	For Firmware upgrade and monitor
Max current (45°C)	800A(each group 100A)
CE	