




Specifications

ELECTRICAL

Frequency	800-960MHz	1710-2500MHz
Gain	7dBi	9dBi
Beamwidth	90°±15°/Horizontal 65°/ Vertical	75°±15°/Horizontal 60°/ Vertical
Polarization	Vertical	
VSWR	≤1.5	
Port Impedance	50Ω	
Maximum input power	50W	

MECHANICAL

RF Connection	N-F
Dimension	210×180×48mm
Net Weight	0.5Kg
Reflector Material	Aluminum Alloy
Radome Material	ABS UV resistant
Radome Color	White
Operating Temperature	-40~+60℃
Mounting	Wall Mount

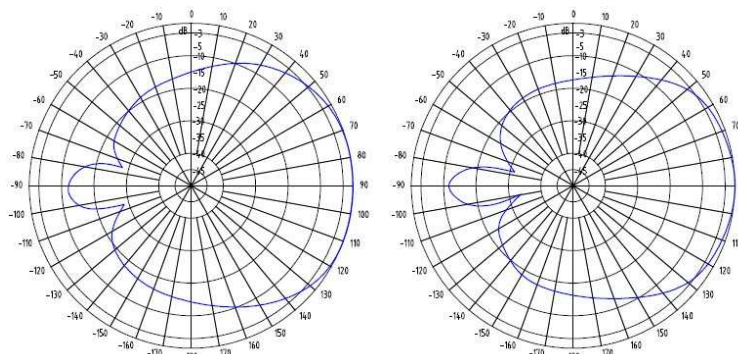

H

V