


CS-T35-R100-WM







Smart Wi-Fi Relay

Introduction




The T35 Wi-Fi Relay, your ultimate solution for seamless wireless control of electrical devices. With our cutting-edge technology, you can now transform any home or workspace into a smart and interconnected environment. The Wi-Fi Relay offers an effortless and convenient way to manage and automate your electronic appliances remotely, providing you with unparalleled freedom and efficiency.

Main Features

-  Wireless Control
-  Scheduling and Automation
-  Secure and Reliable
-  Energy Statistics
-  Voice Control
-  Smart scene

Dimension

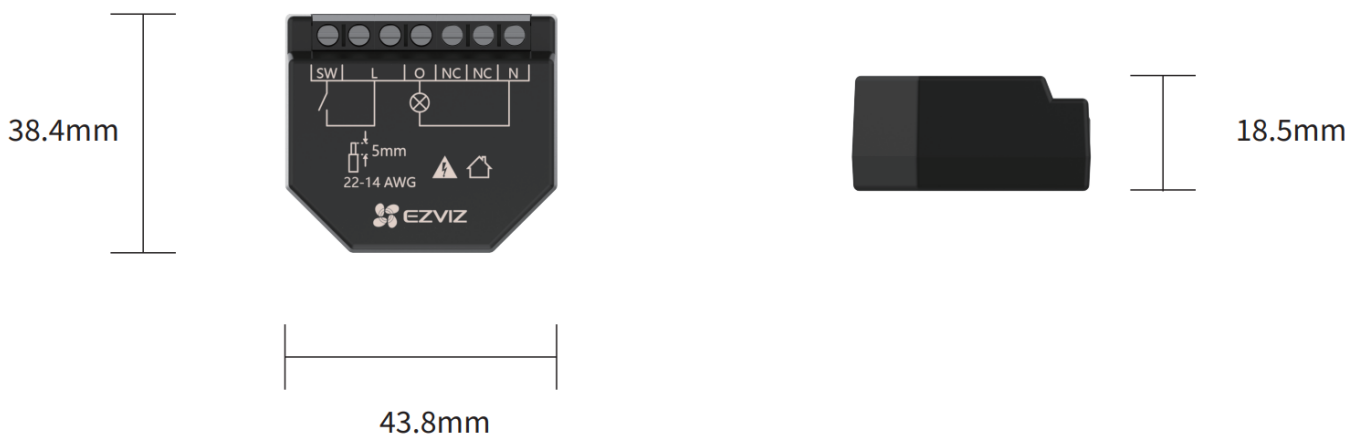

Specifications

Model	CS-T35
Physical	
Sensor type	Wi-Fi Relay
Radio frequency	2.4GHz
Size	38.4*43.8*18.5mm
Net weight	26.5g
With package	89.4g
Mounting	Wall console
Conductor cross section	22 to 14 AWG
Shell material	Plastic
Color	White
Electrical	
Power supply	100-240VAC, 50 –60Hz
Power consumption	≤1.5W
Channels	1 Channel
Connectivity	
Sensor type	Wi-Fi sensor
Radio frequency	2.4GHz
Wi-Fi Standard	IEEE802.11b, 802.11g, 802.11n
Wi-Fi distance	≤ 200m in open environment
Environmental	
Operating Conditions	-10°C to 45°C (14°F to 113 °F), Humidity 95% or less (non-condensing)
Storage temperature	-10°C to 45°C (14°F to 113 °F)
Max. altitude	2000m / 6562ft
Special Function	
Device temperature protection	Yes
Overload protection	Yes
Power measurement	Yes