


# CS-T36-R100-WM

Smart Wi-Fi Relay

## Introduction



The T36, a cutting-edge device that brings convenience and control to your fingertips, you can effortlessly manage and automate the power supply to two separate electrical circuits using your smartphone or any Wi-Fi-enabled device. Experience the seamless integration of technology and convenience with our 2-channel Wi-Fi relay, making your life smarter and more efficient than ever before.

## Main Features



Wireless Control



Energy Statistics



Scheduling and Automation



Two channel with one device




Voice Control



Smart scene

Secure and Reliable

## Dimension

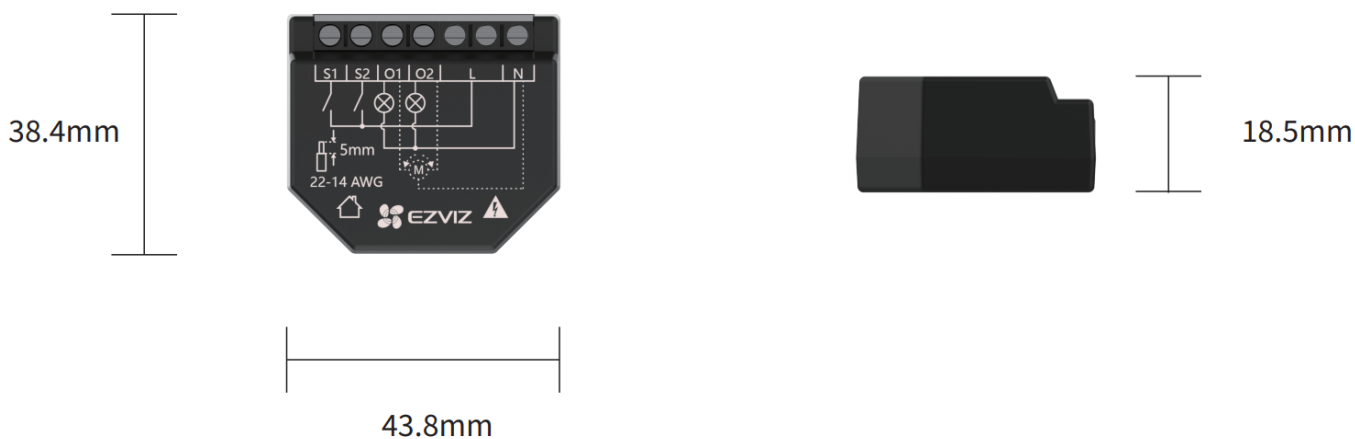

# Specifications

<b>Model</b>	<b>CS-T36</b>
<b>Physical</b>	
<b>Sensor type</b>	Wi-Fi Relay
<b>Radio frequency</b>	2.4GHz
<b>Size</b>	38.4*43.8*18.5mm
<b>Net weight</b>	31.2g
<b>With package</b>	94.1g
<b>Mounting</b>	Wall console
<b>Conductor cross section</b>	22 to 14 AWG
<b>Shell material</b>	Plastic
<b>Color</b>	White
<b>Electrical</b>	
<b>Power supply</b>	100-240VAC, 50 –60Hz
<b>Power consumption</b>	≤1.5W
<b>Channels</b>	2 Channels
<b>Connectivity</b>	
<b>Sensor type</b>	Wi-Fi sensor
<b>Radio frequency</b>	2.4GHz
<b>Wi-Fi Standard</b>	IEEE802.11b, 802.11g, 802.11n
<b>Wi-Fi distance</b>	≤ 200m in open environment
<b>Environmental</b>	
<b>Operating Conditions</b>	-10°C to 45°C (14°F to 113 °F ), Humidity 95% or less (non-condensing)
<b>Storage temperature</b>	-10°C to 45°C (14°F to 113 °F )
<b>Max. altitude</b>	2000m / 6562ft
<b>Special Function</b>	
<b>Device temperature protection</b>	Yes
<b>Overload protection</b>	Yes
<b>Power measurement</b>	Yes