


DHL550UDM-EG

55" FHD Video Wall Display Unit (Ultra Narrow Bezel 1.8mm)

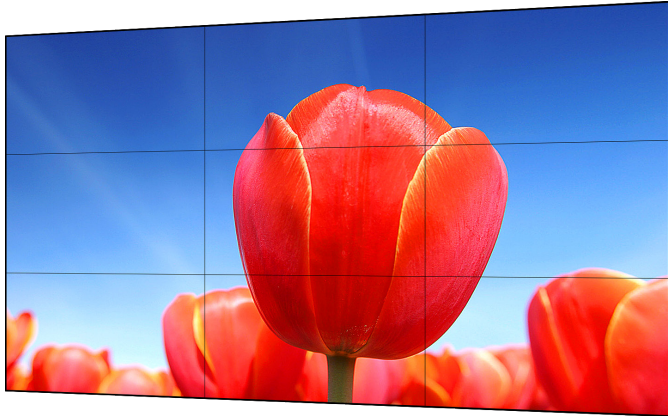

Technical Specification

Model

| | |
|-------|--------------|
| Model | DHL550UDM-EG |
|-------|--------------|

System

| | |
|----------|-----------|
| Diagonal | 55"(16:9) |
|----------|-----------|

| | |
|----------------|-----|
| LCD Technology | IPS |
|----------------|-----|

| | |
|------------|-----------------|
| Resolution | 1920×1080 (FHD) |
|------------|-----------------|

| | |
|-------------|----------------|
| Bezel Width | 0.9mm(U/L/R/B) |
|-------------|----------------|

| | |
|-----------|------------|
| Backlight | Direct LED |
|-----------|------------|

| | |
|----------------------|-----------------------|
| Brightness/Luminance | 500 cd/m ² |
|----------------------|-----------------------|

| | |
|----------------|--------|
| Contrast Ratio | 1400:1 |
|----------------|--------|

| | |
|---------------|-------|
| Pixel Density | 40dpi |
|---------------|-------|

| | |
|---------------|--------------|
| Viewing Angle | H178°, V178° |
|---------------|--------------|

| | |
|---------------|-----|
| Response Time | 8ms |
|---------------|-----|

| | |
|---------------|--------------|
| Display Color | 10bit(1.07B) |
|---------------|--------------|

| | |
|-------------------|---------|
| Color Temperature | 10,000K |
|-------------------|---------|

| | |
|------|---------|
| MTBF | 50,000h |
|------|---------|

Signals

| | |
|-------|--|
| Input | CVBS(BNC)×2, VGA(D-Sub)×1, DVI-D×1, HDMI×1, RS232×1, USB×1, IR×1 |
|-------|--|

| | |
|--------|----------------------|
| Output | CVBS(BNC)×2, RS232×1 |
|--------|----------------------|

Features:



- Industrial level IPS LCD panel, suitable for continuous 24h/7 operation
- Ultra-narrow 1.8mm bezel-to bezel design(0.9mm even panel bezel)
- High contrast ratio and standard brightness greatly enhance the video layering, and present the details of the video
- High fidelity digital processing, brilliant and vivid video
- Built-in 3D COMB filter and 3D Noise Reduction
- Abundant interfaces HDMI, DVI, VGA, BNC, USB
- Built-in picture splicing function
- Infrared, RS232 dual mode, supporting remote PC control
- Professional thermal design to extend equipment lifespan
- Built-in power, low energy consumption, ultra-quiet
- Fast stack installation, professional project design, supporting arc-shaped mounting
- Widely used in surveillance center, dispatching platform, safe city, commercial display, etc.



General

| | | |
|-----------------------------|---|-------------|
| Power Supply | AC100V~AC240V, 50/60 Hz | |
| Power Consumption (Standby) | ≤0.5W | |
| Power Consumption (Typical) | 100W | |
| Power Consumption (Max.) | 160W | |
| Installation Mode | Floor-standing, wall-mounted | |
| Control Mode | Infrared, RS232 dual mode, supporting remote PC control | |
| Net Weight | 24kg(52.91lb) | |
| Gross Weight | 31kg(68.34lb) | |
| Dimension (W×H×D) | 1211.5mm×682.4mm×117.5mm(47.7"×26.9"×4.6") | |
| Package (W×H×D) | 1360mm×945mm×280mm(53.5"×37.2"×11.0") | |
| Work Environment | Temperature | 0 C~+50 C |
| | Humidity | 10%RH~90%RH |

Dimensions(mm)

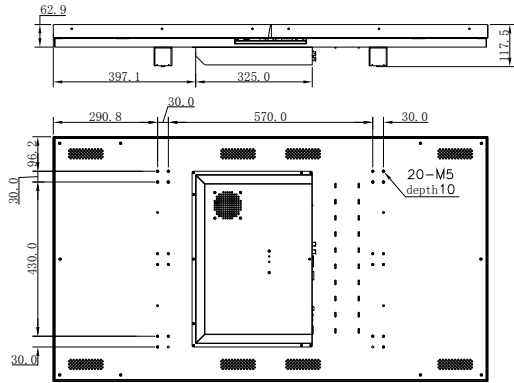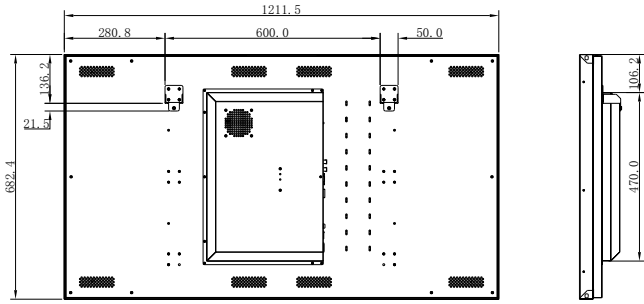

Remove the hook