

DS-2CD1327G3-LIU(F)/S(L)(RB) 2 MP ColorVu 3.0 Fixed Turret Network Camera

ColorVu 3.0



- High quality imaging with 2 MP resolution
- 24/7 colorful imaging
- Support Person and Vehicle Detection
- Strobe Light & Audio Alarm to deter intruders
- Two-Way Audio via camera and Hik-Connect
- Smart Hybrid Light: advanced technology with long range cover
- Efficient H.265+ compression technology
- -F: Support on-board storage up to 512 GB (SD card slot)
- Water and dust resistant (IP67)

▪ Specification

| Camera | |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor | 1/2.8" Progressive Scan CMOS |
| Max. Resolution | 1920 × 1080 |
| Min. Illumination | Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with light |
| Shutter Time | 1 s to 1/100,000 s |
| Day & Night | IR cut filter |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° |
| Lens | |
| Lens Type | Fixed focal lens, 2.8 and 4 mm optional |
| Focal Length & FOV | 2.8 mm, horizontal FOV 106°, vertical FOV 56°, diagonal FOV 129° 4 mm, horizontal FOV 88°, vertical FOV 47°, diagonal FOV 103° |
| Lens Mount | M12 |
| Iris Type | Fixed |
| Aperture | F1.0 |
| Depth of Field | 2.8 mm: 1.2 m to ∞ 4 mm: 1.3 m to ∞ |
| DORI | |
| DORI | 2.8 mm, D: 44 m, O: 17 m, R: 8 m, I: 4 m 4 mm, D: 53 m, O: 21 m, R: 10 m, I: 5 m |
| Illuminator | |
| Supplement Light Type | IR, White Light |
| Supplement Light Range | Up to 30 m |
| Smart Supplement Light | Yes |
| IR Wavelength | 850 nm |
| Video | |
| Main Stream | 50 Hz: 25 fps (1920 × 1080, 1280 × 720) 60 Hz: 30 fps (1920 × 1080, 1280 × 720) |
| Sub-Stream | 50 Hz: 25 fps (640 × 480, 640 × 360) 60 Hz: 30 fps (640 × 480, 640 × 360) |
| Video Compression | Main stream: H.265+/H.265/H.264+/H.264, Sub-stream: H.265/H.264/MJPEG |
| Video Bit Rate | 32 Kbps to 8 Mbps |
| H.264 Type | Baseline Profile, Main Profile, High Profile |
| H.265 Type | Main Profile |
| Bit Rate Control | CBR, VBR |
| Scalable Video Coding (SVC) | H.264 and H.265 encoding |
| Region of Interest (ROI) | 1 fixed region for main stream and sub-stream |
| Audio | |
| Audio Type | Mono sound |
| Audio Compression | G.711ulaw/G.711alaw/G.722.1/G.726/MP2L2/PCM/AAC-LC/MP3 |
| Audio Bit Rate | 64 Kbps (G.711)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 160 Kbps (MP2L2)/16 to 64 Kbps (AAC-LC)/8 to 160 Kbps (MP3) |
| Audio Sampling Rate | 8 kHz/16 kHz |
| Environment Noise Filtering | Yes |


| Network | |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protocols | TCP/IP, ICMP, DHCP, DNS, HTTP, RTP, RTSP, RTCP, NTP, IPv4, IPv6, IGMP, UDP, QoS, FTP, SMTP, UPnP |
| Simultaneous Live View | Up to 6 channels |
| API | ONVIF (Profile S, Profile G, Profile T), ISAPI, SDK |
| User/Host | Up to 32 users 3 user levels: administrator, operator, and user |
| Security | Password protection, complicated password, watermark, basic and digest authentication for HTTP, WSSE and digest authentication for Open Network Video Interface, security audit log, host authentication (MAC address) |
| Client | iVMS-4200, Hik-Connect |
| Web Browser | Plug-in free live view: Chrome 57.0+, Firefox 52.0+, Edge 89+, Safari 11 Local service: Chrome 57.0+, Firefox 52.0+, Edge 89+ |
| Image | |
| Image Settings | Rotate mode, saturation, brightness, contrast, sharpness, gain, white balance, adjustable by client software or web browser |
| Day/Night Switch | Day, Night, Auto, Schedule |
| Wide Dynamic Range (WDR) | 120 dB |
| SNR | ≥ 52 dB |
| Image Enhancement | BLC, HLC, 3D DNR |
| Privacy Mask | 4 programmable rectangular privacy masks |
| Interface | |
| Ethernet Interface | 1 RJ45 10 M/100 M self-adaptive Ethernet port |
| On-Board Storage | -LIU/S(L)(RB): NA -LIUF/S(L)(RB): Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB |
| Built-in Microphone | Yes, 1 built-in microphone |
| Built-in Speaker | Max. power consumption: 2 W, max. sound pressure level: 10 cm: 101 dB |
| Reset Key | -LIU/S(L)(RB): NA -LIUF/S(L)(RB): YES |
| Event | |
| Basic Event | Motion detection (support alarm triggering by specified target types (human and vehicle)), video tampering alarm, exception |
| Linkage | Upload to memory card/FTP, notify surveillance center, send email, trigger recording, trigger capture |
| General | |
| Power | 12 VDC ± 25%, 0.52 A, max. 6.24 W, Ø5.5 mm coaxial power plug, reverse polarity protection, PoE: IEEE 802.3af, Class 3, max. 7.52 W |
| Material | Cover: Plastic, main body: Metal |
| Dimension | Ø110 mm × 102.7 mm (Ø4.3" × 4.0") |
| Package Dimension | 150 mm × 150 mm × 141 mm (5.9" × 5.9" × 5.6") |
| Weight | -LIU/S(L)(RB): Approx. 400g (0.9 lb.) -LIUF/S(L)(RB): Approx. 405g (0.9 lb.) |
| With Package Weight | -LIU/S(L)(RB): Approx. 590g (1.3 lb.) -LIUF/S(L)(RB): Approx. 600g (1.3 lb.) |
| Storage Conditions | -30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing) |

| | |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Startup and Operating Conditions | -30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing) |
| Language | English, Russian, Ukrainian, Arabic, Spanish, French, Portuguese, Turkish, Polish, German |
| General Function | Heartbeat, mirror, flash log, password reset via email, password protection, anti-banding |
| Flashing Light | -LIU(F)/SL: White Light -LIU(F)/SRB: Red and Blue Light |
| Approval | |
| EMC | CE-EMC: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021 |
| Safety | CB: IEC 62368-1:2014+A11, CE-LVD: EN 62368-1:2014/A11: 2017 |
| Environment | CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU, Reach: Regulation (EC) No 1907/2006 |
| Protection | IP67: IEC 60529-2013 |

▪ Available Model

- DS-2CD1327G3-LIUF/SL(2.8mm)
- DS-2CD1327G3-LIUF/SL(4mm)
- DS-2CD1327G3-LIUF/SRB(2.8mm)
- DS-2CD1327G3-LIUF/SRB(4mm)
- DS-2CD1327G3-LIU/SRB(2.8mm)
- DS-2CD1327G3-LIU/SRB(4mm)
- DS-2CD1327G3-LIU/SL(2.8mm)
- DS-2CD1327G3-LIU/SL(4mm)

▪ Dimension

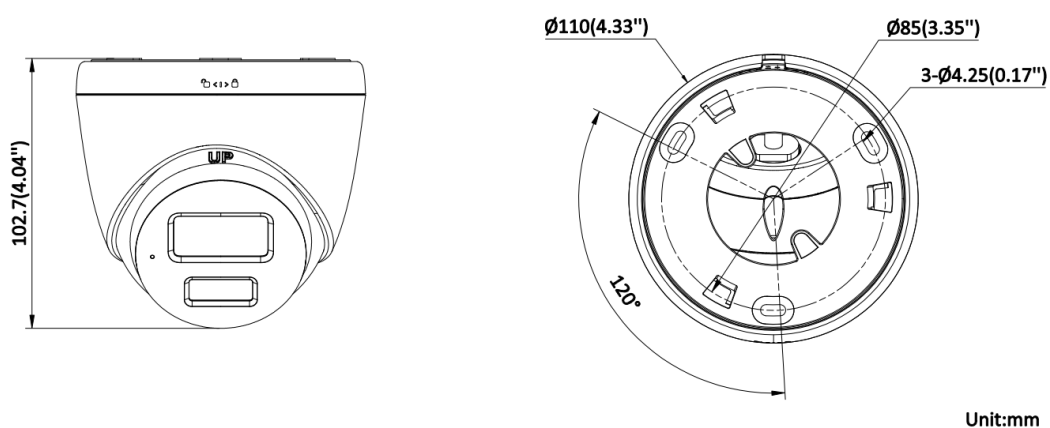

▪ Accessory

▪ Optional

DS-1276ZJ-SUS DS-1271ZJ-110-TRS DS-1272ZJ-110-TRS DS-1275ZJ-SUS DS-1280ZJ-TR13



DS-1281ZJ-S




▪ **Installation Methods**

| | | | | |
|-------------------------------------------------------------------------------|------------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------|
| <p>Corner Mounting DS-1276ZJ-SUS+DS-1272ZJ-110-TRS+DS-1253ZJ-M</p> | <p>Pendant Mounting DS-1271ZJ-110-TRS</p> | <p>Wall Mounting DS-1272ZJ-110-TRS+D S-1253ZJ-M</p> | <p>Vertical Pole Mounting DS-1275ZJ-SUS+DS-1272ZJ-110-TRS</p> | <p>Junction Box DS-1280ZJ-TR13</p> |
|-------------------------------------------------------------------------------|------------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------|



Inclined Ceiling Mounting
DS-1281ZJ-S



See Far, Go Further



www.hikvision.com
support@hikvision.com

