

DS-C60S-04HI**4-Channel HDMI Input Board**

As a new-generation FPGA-based pure hardware image processing device, the DS-C60S video wall controller (hereinafter referred as the device) supports the input, processing, and output of multi-channel HD and ultra-HD signals. The device adopts the structure of main control board, input boards, and output boards to achieve multi-screen management. The device is mainly used for large screen splicing control system, and is the core control device of the system.

- Supports 4 channels of 2K HDMI signal input and YUV 444 collection.
- Supports HDMI composite audio input.


▪ Specification

Model		DS-C60S-04HI
Chassis	Occupied Slot	Input slot
Audio Input	Audio Input Interfaces	4
	Audio Input Interface Type	HDMI composite audio
	Audio Sampling Rate	32K / 48K sampling rate
	Audio Channel	Dual channel
Video Input	Video Input Interface Type	HDMI 1.4
	Video Input Interfaces	4
	Video Input Resolution	1024 × 768@60 Hz, 1280 × 1024@60 Hz, 1366 × 768@60 Hz, 1440 × 900@60 Hz, 1680 × 1050@60 Hz, 1280 × 960@60 Hz, 1600 × 1200@60 Hz, 1280 × 720p@50 Hz, 1280 × 720p@60 Hz, 1920 × 1080p@50 Hz, 1920 × 1080p@60 Hz, 1920 × 1200@60 Hz Custom resolution: width in the range of 800 to 2560, height in the range of 600 to 2560, width × height in the range of 800 × 600 × 60 to 2048 × 1152 × 60
	Max. Video Input Resolution	1080p

▪ Available Model

DS-C60S-04HI

▪ **Dimension**

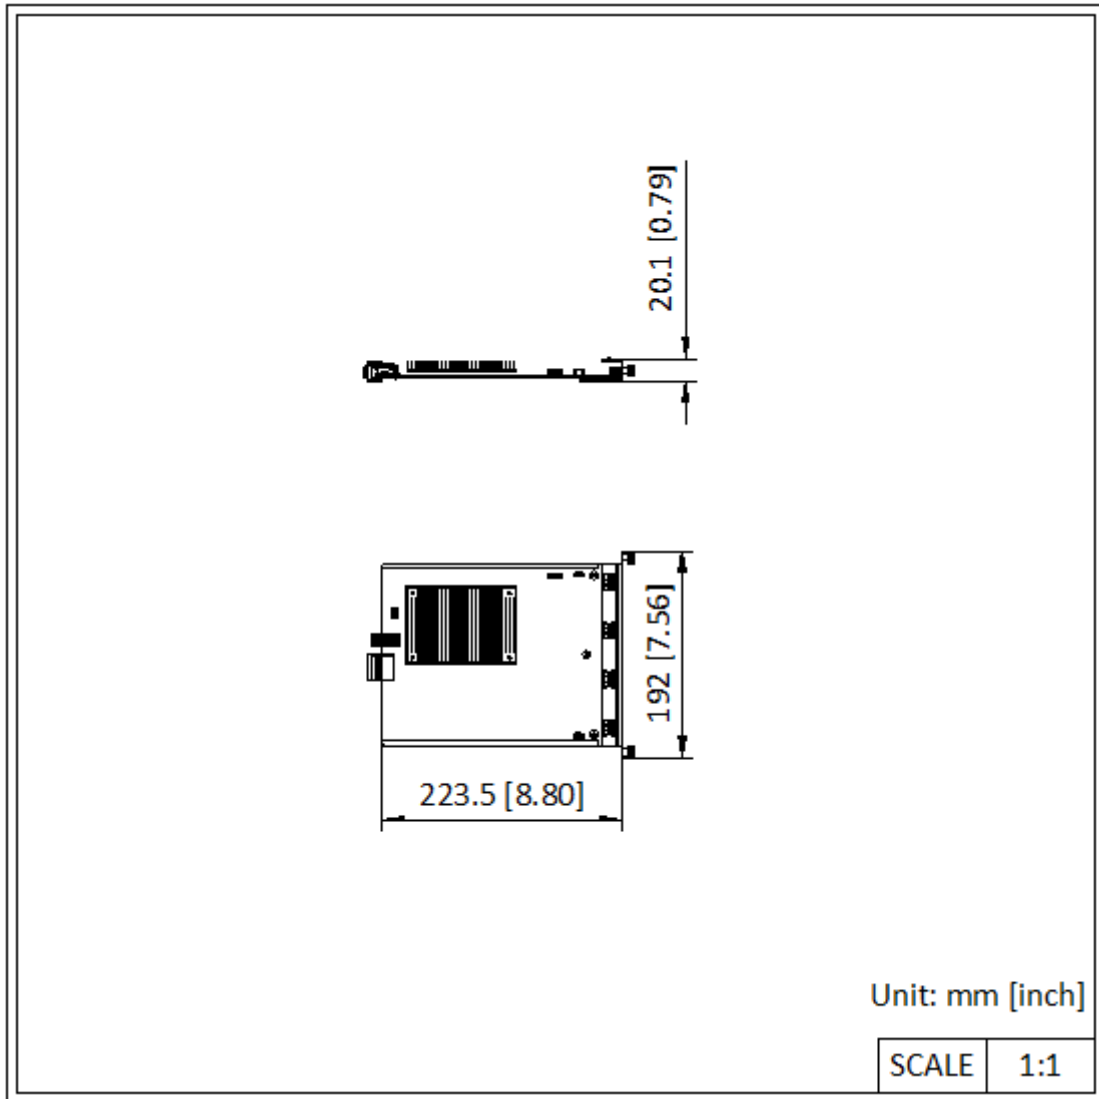

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

