

DS-MCW406 Body Camera

Introduction

Body camera highly integrates with record, taping, capture, positioning, etc. It can record the process and condition of events completely via record, taping, and capture. It satisfies the requirement of mobile duty and evidence record. It is widely applicable to public security protection, city management, industry and commerce, etc.

Key Feature

- 2688*1520 2K HD recording.
- Max. 40M(8832*4968) resolution of the captured picture.
- IR function to recognize the facial features in the captured picture even in dim environment.
- Waterproof and dustproof, applicable to all-day field work.



▪ Available Model

DS-MCW406/128G


DS-MCW406/128G/GPS/WIFI



Camera	
Image Sensor	1/3" CMOS
Max. Resolution	4MP
Day & Night	IR cut filter with auto switch (You can see human face within 3 m at night, You can see human body within 10m at night)
Flashing Light	Supported
Digital Zoom	4X
Video Stabilization	Not Supported
Lens	
FOV	Horizontal: 129° Vertical: 70° Diagonal: 140°
Video	
Video Compression	H.264, H.265
Main Stream	2688*1520@30fps, 1920*1080@30fps, 1280*720@30fps,720*576@30fps
Audio	
Audio Compression	G.711alaw, G.711ulaw, G.722.1
Audio Bit Rate	8K, 16K
Image	
Image Format	JPEG
Image Resolution	5 M (3072 × 1728), 16 M (5312 × 2988), 30 M (7296 × 4104)、40M(8832*4968)
White Balance	Auto White Balance
Screen	
Screen Size	1.77" TFT
Resolution	128*160
Touchscreen	Not Supported
Storage	
Capacity	128 GB in standard, extendable to 256 GB
Network	
Protocol	Hikvision SDK
Wireless Network	
Bluetooth	Not Supported
Wi-Fi Protocol	802.11 b/g/n (For DS-MCW406/32G/GPS/WIFI only)
Positioning Mode	GPS, Beidou, and mixed positioning (For DS-MCW406/32G/GPS/WIFI only)
Interface	
USB	1, USB TYPE-C
Indicator	Charging indicator, Working indicator
Button	On/off, Capture, Record, Tape, Up,Down,Menu,Enter
MIC	Supported
Speaker	Supported
General	
Model	DS-MCW406

Ingress Protection	IP54
Operating System	Linux
Operating Condition	-20°C ~ 55°C (-4 °F to 131 °F)
Working Humidity	≤ 90%
Weight	125g(without shoulder clip) (0.27lb)
Battery	
Capacity	2,500 mAh
Endurance	8h@2K recording, 12h @1080P recording, 14h@720P recording
Charging Time	≤4h



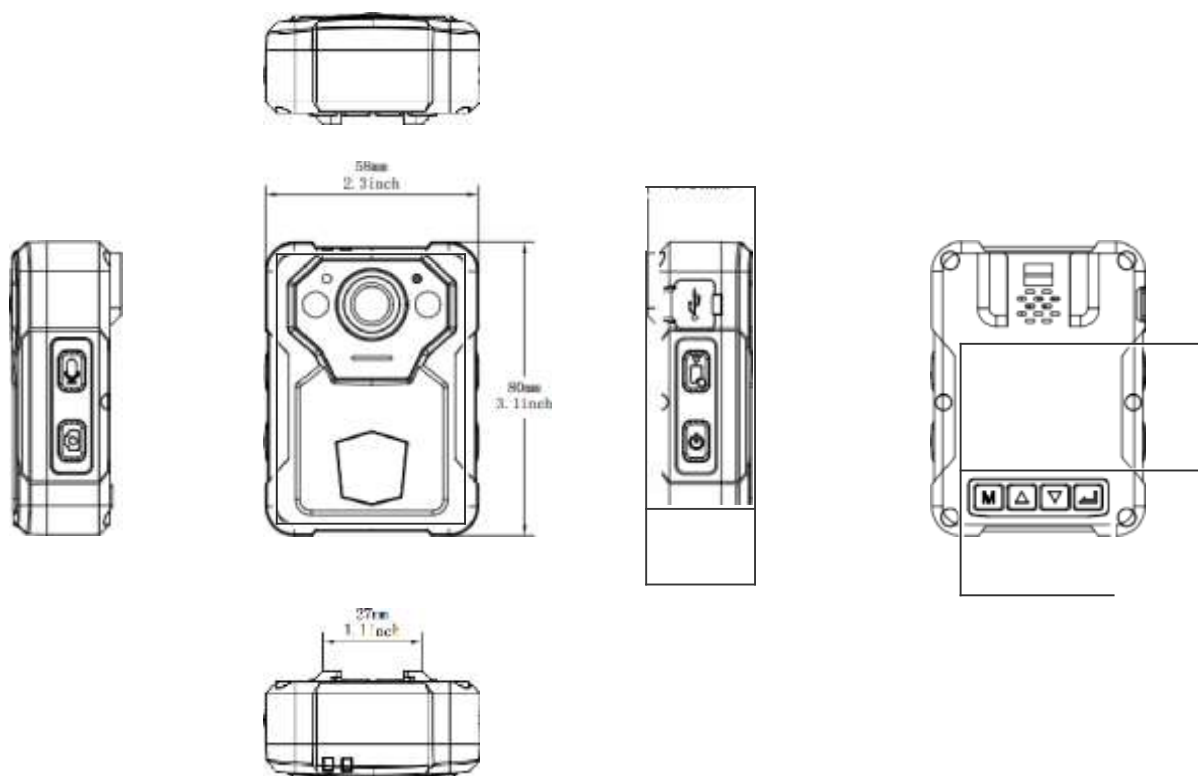

Distributed by

HIKVISION

Headquarters

No.555 Oianma Road, Binjiang District,
Hangzhou ZI OOSI, China
T.as ski 88D7 some
overseasbusiness@hikvision.com

Hikvision USA
+1-909-895-0000
sales.usa@hikvision.com

Hikvision Australia
+61-2-8599-A233
salesau@hikvision.com

Hikvision India
T +91-22-28A69900
sales@pramahikvision.com

Hikvision Canada
+1-888-200-bb80
saescanada@hikvision.com

Hikvision Thailand
SSZ 27s g9 9
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5502770
sales.eu@hikvision.com

Hikvision Italy
T +39-038-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 331B-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 216521 7070-7070
saestf@hikvision.com

Hikvision Malaysia
T +601-7652-2AT5
sales.my@hikvision.com

Hikvision UK & Ireland
I +01628-902100
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 10 0351172
sale.africa@hikvision.com

Hikvision France
I +55(0)1-85-330-050
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9750667
nikia.panfi@hikvision.ru

Hikvision Vietnam
T +80-970270888
sales.vt@hikvision.com

Hikvision UAE
T +971-0-003209B
salesme@hikvision.com

Hikvision Singapore
I +6S-6680-0718
sg@hikvision.com

Hikvision Spain
T +5C-91-737-16-SS
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9038
uzb@hikvision.ru

Hikvision Hong Kong
T +8SP-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-095-669-67-99
SD19FU@hikvision.com

Hikvision Korea
I +82-10-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-60-D1-50
info.pl@hikvision.com

Hikvision Indonesia
I +62-218fi337Sfi
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com