

## DS-UC8 4K Web Camera



- High quality imaging with 3840 × 2160 resolution
- Low distortion lens for reducing image distortion
- Built-in dual-microphone with clear sound
- USB Type-C interface, supporting USB 3.0 protocols
- Plug-and-play, no need to install driver software
- Support auto focus



## ▪ Specification





Camera	
Image Sensor	8 MP CMOS
Signal System	PAL/NTSC
Frame Rate	MJPG: 3840 × 2160 @ 30 fps/25 fps 2560 × 1440 @ 30 fps/25 fps 1920 × 1080 @ 30 fps/25 fps 1280 × 960 @ 30 fps/25 fps 1280 × 720 @ 30 fps/25 fps 640 × 480 @ 30 fps/25 fps 640 × 360 @ 30 fps/25 fps YUV: 1920 × 1080 @ 30 fps/25 fps 1280 × 960 @ 30 fps/25 fps 1280 × 720 @ 30 fps/25 fps 640 × 480 @ 30 fps/25 fps 640 × 360 @ 30 fps/25 fps NV12 : 1920 × 1080 @ 5 fps 1280 × 960 @ 10 fps 1280 × 720 @ 15 fps 640 × 480 @ 30 fps
Resolution	3840 (H) × 2160 (V)
Min. Illumination	0.1 Lux @ (F1.2, AGC ON)
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Lens	3.6 mm fixed focal lens
Field of View	horizontal FOV: 83°, vertical FOV: 53°, diagonal FOV: 91°
Lens Mount	M8
Day & Night	24/7 Color Imaging
Angle Adjustment	pan: 0° to 360°; tilt: 0° to 35°; rotation: 0°
Cable Length	2 m
Depth of Field	0.1 m to ∞
Image	
Wide Dynamic Range (WDR)	Digital WDR
Image Enhancement	Distortion Correction
White Balance	Auto
Audio	
Audio Sampling Rate	16 kHz
Interface	
Video Output	USB 3.0

Operating System	Windows 8.1+ Android 8.1+ Linux 4.14+ macOS 10.12+ Chrome OS
Built-in Microphone	2 built-in microphones, picking up sounds in the radius up to 5 meters
Indicator	White: Normally Working
<b>General</b>	
Operating Conditions	-10°C to 45°C (-40°F to 113°F), Humidity: 90% or less (non-condensing)
Power Supply	DC 5V ± 5% (USB)
Consumption	4.5 W MAX
Dimension	120 mm × 27.9 mm × 25.6 mm (4.72" × 1.10" × 1.01")
Weight	Approx. 150 g (0.33 lb.)
<b>Accessory</b>	
Packing List	Camera × 1 USB Cable × 1 Quick Start Guide × 1

## ▪ Available Model

DS-UC8

## ▪ Dimension

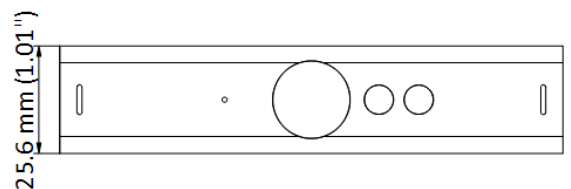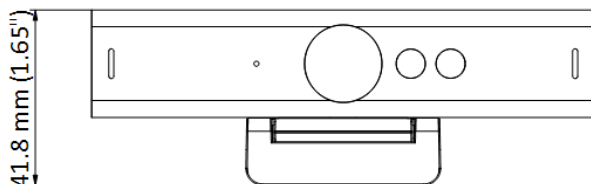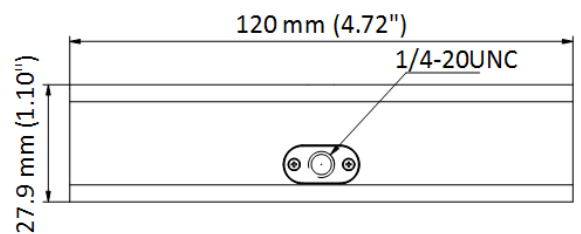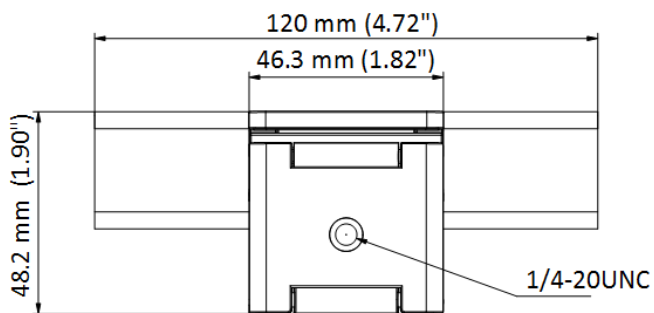

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 [216]521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com