
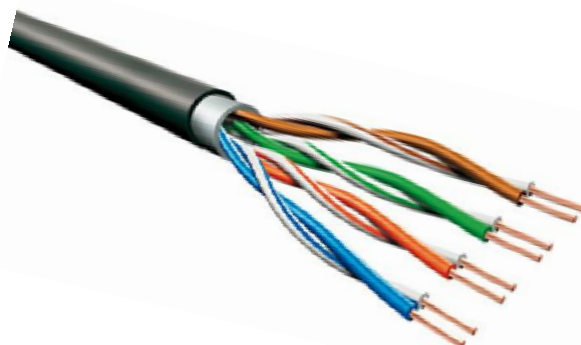


Category 5e CCAM UTP Cable Double Jacket for Outdoor

Part Number: EPCAT5EV2EXT

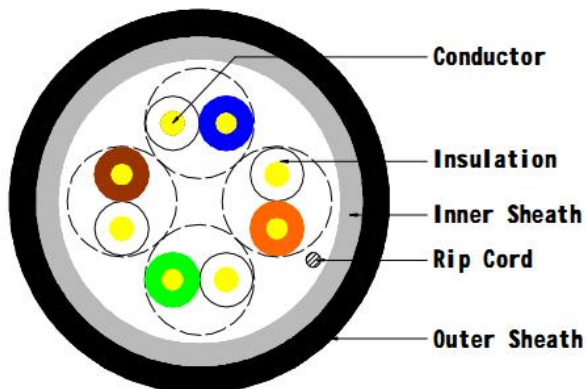

Application

Voice, Data, Security and Video Applications.
IP Megapixel CCTV/Analog Installations
Wire Access Points
Gigabit Outdoor Video/data installations
Suitable distance PoE feeding

Standards

ANSI EIA/TIA 568 C.2;
ISO/IEC 11801 2nd Edition; IEC 61156-5
EN 50173; EN 50288-3-1
IEEE 802.3at

UV Resistance Rating

EN 50289-4-17

Construction

Conductor	Copper Clad Aluminum Magnesium (AWG24/0.50mm)
Insulation	Polyethylene, $\varnothing 0.91 \pm 0.02$ mm
Insulation Color	Blue/White-Blue, Orange/white-Orange, Green/white-Green, Brown/white-Brown
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core
Inner Sheath	PVC Grey RAL 7046
Diameter	5.0 ± 0.2 mm
Outdoor Sheath	Black LDPE
Diameter	6.2 ± 0.2 mm

Mechanical properties

Minimum bending radius	Installation	8 x D
Temperature range	Installed	4 x D
	during operation	-20 °C ~ + 60 °C
	during installation	0 °C ~ + 50 °C

Electrical properties @ 20°C

Conductor resistance	Max 24 ohm/100M at 20°C
Max Operating capacitance	56 nF/KM
Standard impedance	100±15 ohm between 1Mhz and 100Mhz
Minimum bending radius	50mm
Dielectric strength DC(V) / minute	1000
Min Dielectric resistance	5000 MΩ·KM
Working temperatures	-20~60°C

Nominal transmission characteristics @ 20°C

Frequency (Mhz)	ACR (dB)	RL (dB)	ATT (dB/100)	Min NEXT (dB)	Min PS-NEXT (dB)	Min ELFEXT (dB)	Min PS-ELFEXT (dB)
1	66.3	20	2.1	68.0	66.0	63.8	60.8
4	55.2	23.0	4.2	59.2	57.2	51.7	48.8
8	49.0	24.5	5.9	54.8	52.8	45.7	42.7
10	46.8	25	6.6	53.3	51.3	43.8	40.8
16	42.1	25	8.3	50.3	48.3	39.7	36.7
20	39.5	25	9.4	48.8	46.8	37.8	34.8
25	36.9	24.3	10.3	47.3	45.3	35.8	32.8
31.25	34.2	23.6	11.8	45.9	43.9	33.9	30.9
62.3	24.4	21.5	17.1	41.1	39.4	27.8	24.8
100	16.3	20.1	22.2	38.3	36.3	23.8	20.8

© SYSCOM, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Syscom: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Syscom. The information is believed to be correct at the time of issue. Syscom reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Syscom.
