


DirectIP 6500 Series H.265 4K Recorder

DR-6532P



- Total incoming throughput 370Mbps
- Up to 960ips UHD real-time recording
- Supports H.265 / H.264 codec
- Supports UHD display
- Up to 960ips live display
- Easy to install, set-up, and play with DirectIP cameras
- Built-in 16 channel PoE Switch
- Expandable up to 124TB using eSATA storage
- Supports RAID 1
- Supports one click network configuration through FEN service
- Supports third party cameras (Axis, Panasonic, ONVIF)
- NDAA Compliance

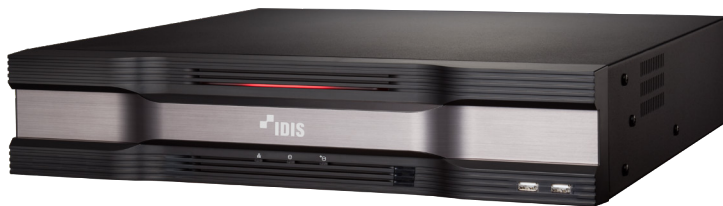



SPECIFICATIONS

VIDEO	
Video Inputs	32 IP Channels
Max. Incoming Throughput	370Mbps
Supported Camera	DirectIP, AXIS, PANASONIC, ONVIF
Video Outputs	2 HDMI
Display Resolution	HDMI : 3840x2160, 1920 x 1200, 1920 x 1080, 1680 x 1050, 1600 x 1200
Display Speed	Up to 960ips
Digital Zoom	x2 ~ x12
RECORDING	
Max. Throughput	230Mbps, 960ips@UHD
Recording Resolution	Up to 12MP (Depending on IP Camera)
Compression	H.265, H.264
Recording Mode	Time-lapse, Event, Pre-event, Panic
Trigger Events	Alarm In, Audio Detection, Motion Detection, Trip-zone, Tampering, Video Loss, Text-in, Etc.
PLAYBACK	
Performance	32ch synchronous playback
Search Mode	Time-lapse, Event Log, Text-in, Thumbnail
Digital Zoom	x2 ~ x12
STORAGE	
HDD	SATA x 6, eSATA x 4, RAID 1 supported
Total Capacity	252TB=10TB x 6(Internal) + 12TB x4x4(External))
NETWORK	
Client Connection	Gigabit Ethernet (Client) x 1
Video In Connection	Gigabit Ethernet (IP Camera) x16 +Gigabit Ethernet(Ext) x1
Transmission Speed	50Mbps / 100Mbps (BRP Mode)
Camera Power	PoE (IEEE 802.3at Class 4) Supported 16 Ports, 120W
Remote Data Export	IDIS Player, AVI, JPG
Event Notification	Email (Attach Clip (.cbf) .MP4), Callback to Remote S/W, Push Notification (IDIS Mobile)
Two-way Audio	Yes
Client Viewer	IDIS Center, IDIS Mobile, IDIS Web, IDIS Solution Suite
INTERFACE	
Audio In / Out	Local (NVR) : 1 RCA / 1RCA + 2HDMI IP Camera : 32 / 32 (Depending on IP Camera)
Alarm In / Out	Local(NVR) : 4 / 1 IP Camera : 32 / 32 (Depending on IP Camera)
Alarm Reset In	1
Serial Interface	RS232 (Terminal Block), RS485 (Terminal Block)
USB	USB 2.0 x 2, USB 3.0 x 1
User Interface	Mouse, IR Remote Control, Network Remote Keyboard
GENERAL	
Operating System	Embedded Linux
Unit Dimensions (W x H x D)	430mm x 88mm x 412.8mm (16.9" x 3.5" x 16.25")
Unit Weight	6.75kg (14.88lb) (with 1 HDD)
Working Temperature	0°C to 40°C (32 °F ~ 104 °F)
Operating Humidity	0% ~ 90%
Power Input	AC 100-240 V, 50/60Hz, 3.0 - 1.5A
Power Consumption	100-240V~, 50/60Hz, 3.0-1.5A, 250W
Approvals	FCC, UL, CE, CB

DIMENSIONS



(Unit - mm)

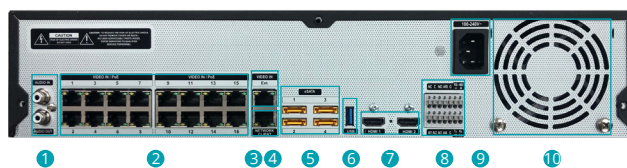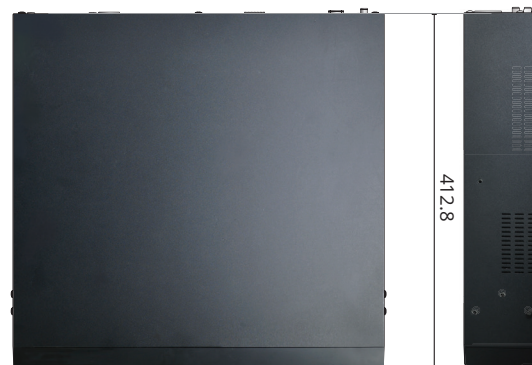

- | | |
|------------------------|-------------------------|
| ① Audio In / Audio Out | ⑧ Alarm Connection Port |
| ② Video In / PoE | RS232 / RS485 Port |
| ③ Video In / Ext. Port | ⑨ Power In Port |
| ④ Network Client Port | ⑩ Vent |
| ⑤ eSATA Port | |
| ⑥ USB | |
| ⑦ HDMI 1 / HDMI 2 | |

ACCESSORIES (OPTIONAL)



DH-2212PF



DA-ES1104B