


# 4 x 2 True 4K Presentation Matrix Switch

## VP1420

The ATEN VP1420 is a multi-in-one presentation switch that integrates a video matrix switch, True 4K scaler, audio processor, and analog-to-digital converter functions into one compact device that easily mounts under a table or in a rack. With four analog/digital inputs to two HDMI True 4K outputs, it is designed to boost the efficiency and impact of professional presentations.

With streamlined control from front-panel pushbuttons, IR remote controller, RS-232, and web-based GUI via Ethernet, the VP1420 reduces not only system device count, but also lowers operation complexity. It is suitable for all meeting space and education environments, such as huddle rooms, classrooms, training rooms, or any other presentation setting, such as in exhibition galleries or hotels.

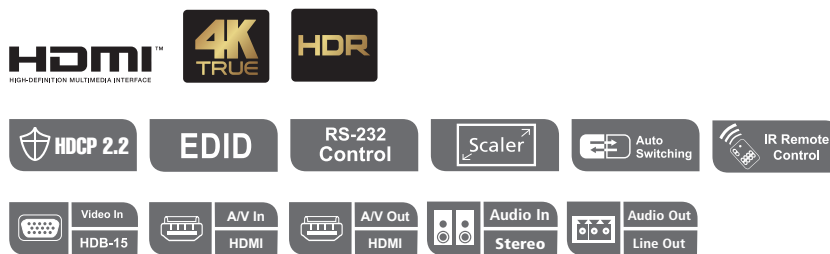

Front view



Rear view



## Features

### Analog/Digital AV Matrix Switching


- Supports multi-format 4 inputs – 3 HDMI and 1 VGA inputs
- 2 HDMI outputs
- Audio embedding – stereo audio can be embedded into HDMI output or separated to stereo line out
- Audio de-embedding – HDMI audio can be extracted to stereo line out
- Auto switching – automatically detects and switches to a new source as soon as it is connected

### High-definition Video with Optimum Output

- Superior video quality – True 4K resolutions up to 4096 x 2160@60Hz (4:4:4) (HDMI)
- Supports 4K HDR
- Scaler – supports video upscaling to 4K for display A and downscaling to 1080p for display B
- EDID Expert™ – automatically selects the optimum EDID settings for smooth power-up, high-quality display, and the best video resolution across connected devices
- HDMI (3D, Deep Color, 4K); HDCP 2.2 compliant

### Versatile, Streamlined Operation

- Multiple control options – flexible control via front-panel pushbuttons, IR remote control, RS-232, and web-based GUI through Ethernet
- View and control via ATEN Video Presentation Control App in a swift and agile way
- Supports stand-by mode for power saving and fast waking up
- Consumer Electronics Control (CEC) support
- Built-in Contact in and LED out for keypad control using VPK104 Contact Closure Remote Pad

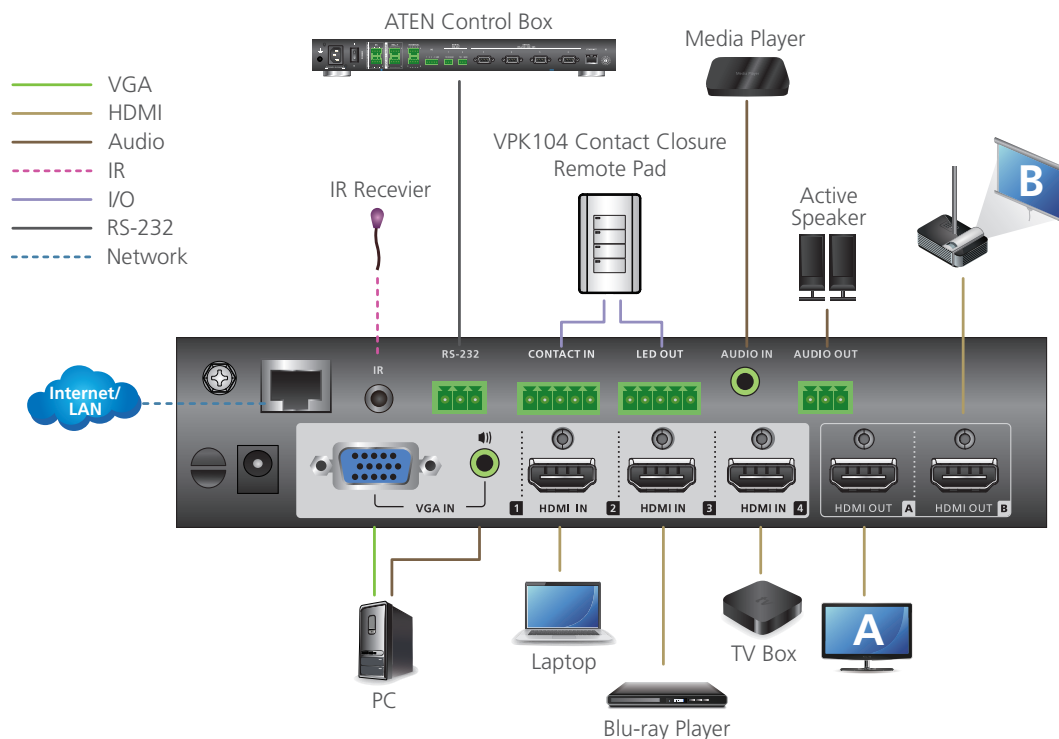

## Specifications

VP1420	
<b>Video Input</b>	
Interfaces	3 x HDMI Type A female (Black) 1 x VGA (HDB-15) Female (Blue)
Max. Distance	HDMI: 4K@60Hz (4:4:4) at 5m; 4K@30Hz at 10m; 1080p@60Hz at 15m VGA: 1080p@60Hz at 15m
<b>Video Output</b>	
Interfaces	2 x HDMI Type A female (Black)
Max. Distance	HDMI: 4K@60Hz (4:4:4) at 5m; 4K@30Hz at 10m; 1080p@60Hz at 15m
<b>Video</b>	
Max. Resolution	HDMI: Up to 4096 x 2160 / 3840 x 2160 @ 60Hz (4:4:4) VGA: Up to 1080p@60Hz
Compliance	HDMI (3D, Deep Color, 4K); 4K HDR HDCP 2.2 Compatible; Consumer Electronics Control (CEC)
<b>Audio</b>	
Input	Stereo Audio (VGA): 1 x mini stereo Jack female (Green) Stereo Audio (HDMI): 1 x mini stereo Jack female (Green)
Output	Line Out (Unbalanced): 1 x Captive Screw Connector, 3-pole
<b>Control</b>	
RS-232	1 x Captive Screw Connector, 3-pole
IR	1 x Mini Stereo Jack Female (Black)
Ethernet	1 x RJ-45 Female (Silver)
Contact In	1 x Captive Screw Connector, 5-pole
LED Out	1 x Captive Screw Connector, 5-pole; LED out power: +5 VDC, 0.2 A
<b>Switches</b>	
Power	1 x Pushbutton (LED: Green / Orange)
Video Input Port Selection	4 x Pushbutton (LED: Green)
Video Output Port Selection	2 x Pushbutton (LED: Orange)
Selection	Mute: 1 x Pushbutton; Mode / Unlock: 1 x Pushbutton
<b>EDID Settings</b>	
EDID Mode: ATEN Default / Display A / Remix	
<b>Connectors</b>	
Power	1 x DC Jack (Black)
<b>Power Consumption</b>	
DC5V: 7.21W	
<b>Environmental</b>	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-Condensing
<b>Physical Properties</b>	
Housing	Metal
Weight	1.09 kg
Dimensions (L x W x H)	20.00 x 16.05 x 4.40 cm

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 04/2021 V8.0

© Copyright 2021 ATEN® International Co. Ltd.  
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.  
 The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

