


**Features of LiFePO4 Battery**

**LI200A12C  
LiFePO4 Battery Pack  
VP 12.8V200Ah**



- ⚙ **Longer Cycle Life:** Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.
- ⚙ **Lighter Weight:** About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.
- ⚙ **Higher Power:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.
- ⚙ **Wider Temperature Range:** -20°C~60°C.
- ⚙ **Superior Safety:** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.
- ⚙ **Increased Flexibility:** Modular design enables deployment of up to four batteries in series and up to ten batteries in parallel.


**Dimensions**

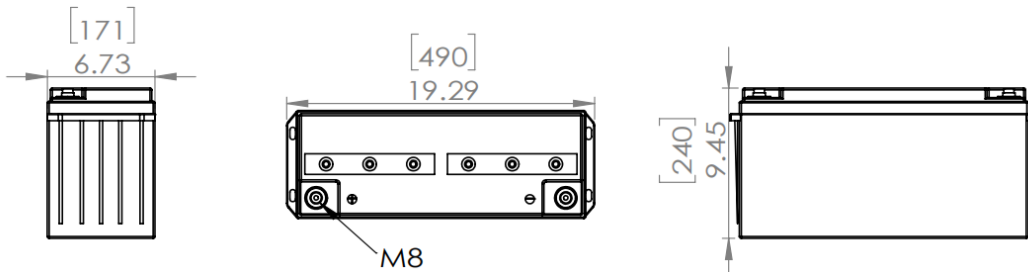


**Specification**

Electrical Characteristics	Nominal Voltage	12.8V	
	Rated Capacity (77°F/25°C)	200Ah @0.5C	
	Minimum Capacity (77°F/25°C)	200Ah @0.5C	
	Circuit Protection	Over charge, Over discharge, Over current, Over temp, Short, Balance	
	Cycle Life	3000times Cycles @100%DOD and 6000times @80% DOD	
	Monthly Self Discharge	Less than 3%	
	Efficiency of Charge	100% @0.5C	
	Efficiency of Discharge	96-99% @1C	
Charge	Charge Voltage	14.4±0.2V	
	Standard Charge Current	50A	
	Max.Charge Current	80A	
Discharge	Standard Discharge Current	100A	
	Max. Continuous Current	150A	
	Discharge Cut-off Voltage	10V	
	Peak Discharge Current	700A(3s)	
Environmental	Charge Temperature	0°C-55°C (>0.1C)	-20°C-0°C(≤0.1C)
	Discharge Temperature	-20°C-60°C	@60±25% Relative Humidity
	Storage Temperature	-20°C-45°C	
Dimensions	490*171*240mm		
Case / IP class	Plastic case / IP65		
Terminal	M8		
Approx Weight	20Kg		


Different Rate Discharge Curve(25°C)

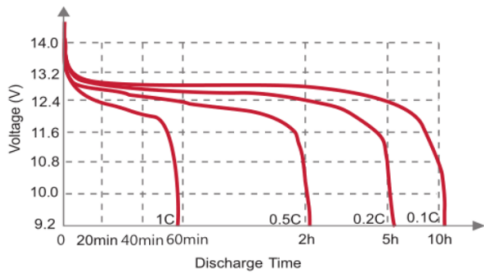


Different Temperature Discharge Curve (0.5C)

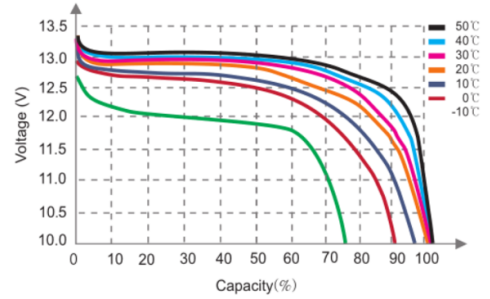


State of Charge Curve (0.5C, 25°C)

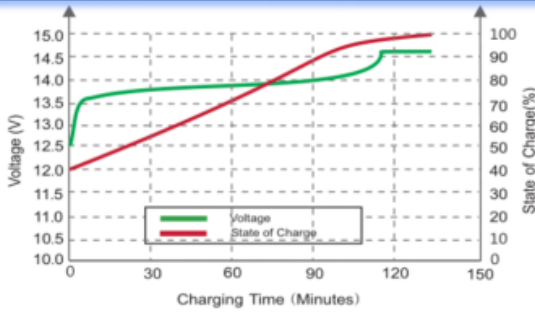

Charging Characteristics (0.5C, 25°C)

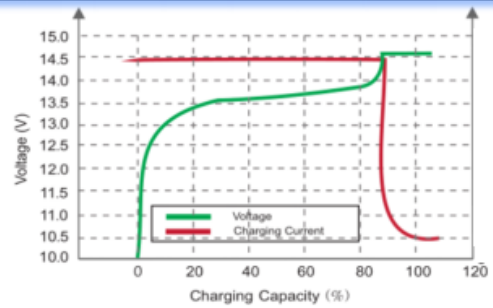

Different DOD Discharge Cycle Life Curve

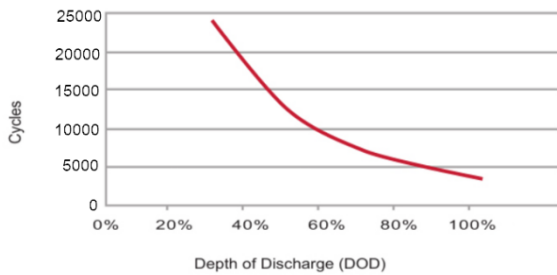

Different Temperature Self Discharge Curve

