

\*HQHUDO 6HULHV E

/D VHULH GH EDWHUTDV /.1.( '352 HVWiQ GLVHxDGDV FRQ WHFQRORJtD \$\*0 95/\$ )LEUD C  
UHJXODFLyQ SODFDV GH DOWR UHQGLPLHQWR \ HOHFWUyOLWR SDUD SURSRUFLRQDU X  
/.1.( '352 VRQ EDWHUTDV GH UHVSDOGR SDUD HTXLSRV HOHFWUyQLFRV FRQ XQD YLGD ~  
FXPSOHQ FRQ ORV HVWiQGDUHV i,Q&D S\JRE,B QD(X USFREJD\W HOAW \ &(

## ● Application



• & D U D F W H U t V W L F D


\* 5HMLOOD GH \$OWD 5HVVLWHQFLD Construc Fy  
 \* (QVDPEODMH 0HFDQL]DGR \*Positivo \$ \$ \$ Dióxido de plomo \* Negativ R\$ \$ \$ \$, 3 O R P R  
 \* &RQVWUXFFLyQ D 3UXHED GH 'HUUDPHV \*ROHFWSUREOFILVGIR V X O I ~ U L \*Valvuladeseguridad \$ \$ EPDR  
 \* \$OWD &RQILDELOLGDG \ (VWDELOLGDG Separador \$ \$ Fibra de vidrio \* Terminal \$ \$ \$ \$ Co E U H  
 \* 6HOODGD \ /LEUH GH 0DQWHQLPLHWR  
 \* 'LVHxR GH /DUJD 9LGD ÒWLO \ %DMCarcasa x R G ABS con alta impacto (UL94-HB)/

## ● Specifica En

ORGHOR	9ROWDMH 1RPLQDO &DSDFLGDG QRPLQDO WD				9 FHOGDV SRU XQLGDG \$K			
Dimension	/RQJLWXG PP SXOJ\G				\$QFKR PP SXOJD			
3HVR DSSUR[	NJ OEV "							
5HVLVWHQFLD ,QWHUQD	&DUFRPSOHHWQGD '\$SSSUR[ P							
&RUULHQWHDQH	\$							
&RUULHQWHDQH	\$ 6HF							
&RUULHQWHDQH	\$							
5DQJR GH WHP SHWDWYXHP RSHUDF	LyQ QR PHQDQDQJ		&DWDJ		\$OPDFHQDPL HQWR			
GH RSHUDF	LyQ ' a ' a '		a ' a '		a ' a '			
Capaci GD@25	7DVD GH K\$	7DVD GH .6 K\$	97DVD G \$	\$ 7DVD GH K\$				
	\$K	\$K	\$K	\$K				
&DSDFLGDG DIHFWDGD								
SR UTep(20HR)								
OpWRGR GH F.D.I.I.J.D.	7HQVLYQ GH FDUJD IORWDQWH	7HQVLYQ GH FDUJD SDUD	XVR FtF					
	a 9' & 8 QD W	a 9' & 8 QD W						

### • 'LPHQVLRQHV(m)WH

● 7H UPLQDC

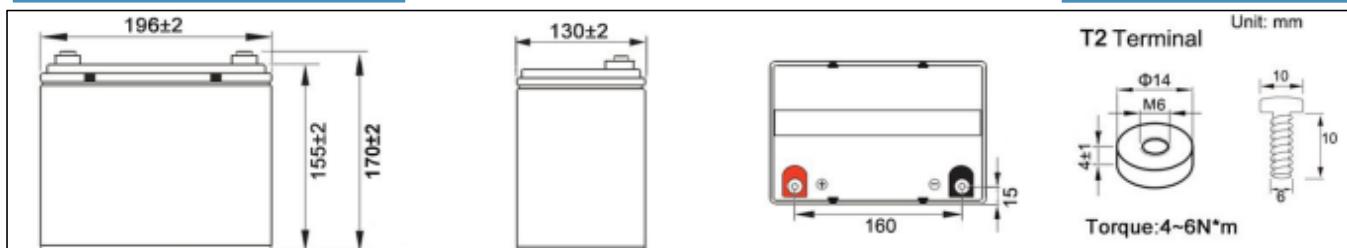

• 7DEOD GH GHVEDUJD D FRUUULHQWH FRQVWDQW H77\$PS

F.V/Time	5min	10min	15min	20min	30min	1h	2h	3h	5h	8h	10h	20h	
1.85V/cell	A	98.5	75.5	62.0	50.5	37.30	22.00	12.78	9.25	6.25	4.18	3.52	1.873
	W	186	145	120	98.2	73.40	43.80	25.69	18.64	12.63	8.46	7.13	3.801
1.80V/cell	A	110.0	81.4	65.6	53.0	38.46	22.50	13.01	9.40	6.35	4.24	3.57	1.900
	W	205	154	126	102.5	75.20	44.70	26.07	18.89	12.80	8.56	7.21	3.850
1.75V/cell	A	120.5	86.8	68.9	55.3	39.55	22.94	13.22	9.53	6.44	4.29	3.60	1.916
	W	221	163	131	106.3	76.90	45.40	26.42	19.11	12.96	8.65	7.26	3.877
1.70V/cell	A	130.3	91.9	71.9	57.5	40.58	23.34	13.41	9.65	6.52	4.34	3.62	1.927
	W	236	170	136	109.9	78.40	46.10	26.74	19.30	13.09	8.72	7.29	3.894
1.67V/cell	A	135.2	94.5	73.4	58.6	41.10	23.52	13.49	9.71	6.55	4.35	3.63	1.932
	W	243	174	139	111.6	79.20	46.40	26.86	19.40	13.14	8.74	7.30	3.903
1.60V/cell	A	143.0	98.6	75.5	60.3	42.00	23.80	13.62	9.80	6.60	4.38	3.64	1.937
	W	253	180	142	114.3	80.60	46.80	27.07	19.55	13.23	8.80	7.32	3.908

