

M2M
SERVICES

SIMPLICITY.
APPLIED.

FUTURE-PROOF COMMUNICATORS FOR THE ALARM BUSINESS



MN02-LTE-M

5G READY

now with
LTE-M

COMPONENT



Intertek



FUTURE-PROOF TECHNOLOGY

LTE-M on AT&T and Verizon networks



REMOTE PANEL PROGRAMMING

Upload/Download via RING/TIP to selected panels



INTERACTIVE FEATURES

Smartphone App for end users and Admin App for installers



IMPROVED RECURRING REVENUE

Flat-rate low monthly fees for improved profitability



MN02-LTE-M

MAIN FEATURES

UNIVERSAL PANEL COMPATIBILITY – Dial Capture Interface supporting Contact ID, SIA and Pulse 4+2

UPLOAD/DOWNLOAD for selected panels: DSC, Honeywell and NX series

REMOTE ARM/ DISARM/ STAY ARM of multiple partitions via keybus for selected panels

EXCEPTIONAL REDUNDANCY – Dual-SIM, supporting AT&T and Verizon (model specific)



SUPERVISED CONNECTIVITY – 10 minute polling of the connection

ADMIN PORTAL – Online 24/7 device management & real-time status monitoring of all accounts

Remote Upload/Download



The UDL software you are familiar with –
DLS, Compass, DL900

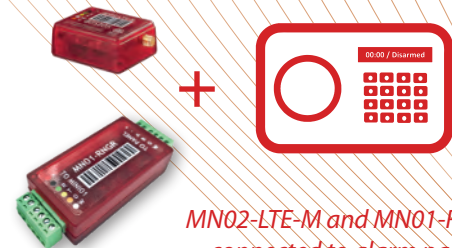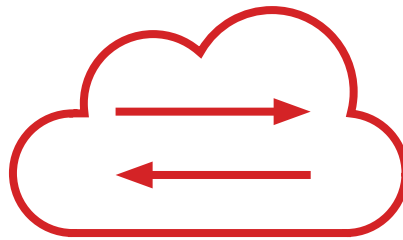

MN02-LTE-M and MN01-RNGR
connected to alarm panel

MN02-LTE-M supports MN01-RNGR module for remote UDL
via the RING/TIP for selected panels (DSC, Honeywell and GE NX series)

MN02-LTE-M SPECIFICATIONS

- Multi-band LTE-M 700/850/1700/1900/2100 MHz
- 1 input & 1 output (programmable)
- Supply voltage: +12 to +24 VDC
- Consumption: Standby 15mA, Peak 200mA
- Dimensions: 1.6" x 1.95" x 0.8"
- Weight: 1oz without antenna

SMARTPHONE APPs FOR END USERS & INSTALLERS


- RControl and RControl Admin for Android / iPhone
- Remote ARM / DISARM
- Real-time push and email notifications
- Multiple end users and devices per account
- 12 months events history
- Basic configuration and diagnostics

CONFORMS TO UL STANDARDS

- 985 • Household Fire Warning Systems
- 1023 • Household Burglar Alarm Systems
- 1610 • Central-Station Burglar-Alarm Units



GET IT ON
Google play



Available on
iTunes

