



Simply Better Connections

VE1812

HDMI HDBaseT Extender
with PoH
User Manual

Compliance Statements

FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

The device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Warning

Operation of this equipment in a residential environment could cause radio interference.

Achtung

Der Gebrauch dieses Geräts in Wohnumgebung kann Funkstörungen verursachen.



KCC Statement

유선 제품용 / A 급 기기 (업무용 방송 통신 기기)
 이 기기는 업무용 (A 급) 전자파적합기기로서 판매자 또는 사용자는 이
 점을 주의하시기 바라며, 가정 외의 지역에서 사용하는 것을 목적으로
 합니다.

Industry Canada Statement

This Class A digital apparatus complies with Canadian ICES-003.

CAN ICES-003 (A) / NMB-003 (A)

HDMI Trademark Statement

The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.



VCCI Statement

この装置は、クラスA機器です。この装置を住宅環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

VCCI - A

RoHS

This product is RoHS compliant.

User Information

Online Registration

Be sure to register your product at our online support center:

| | |
|---------------|---|
| International | http://eservice.aten.com |
|---------------|---|

Telephone Support

For telephone support, call this number:

| | |
|---------------|------------------|
| International | 886-2-8692-6959 |
| China | 86-400-810-0-810 |
| Japan | 81-3-5615-5811 |
| Korea | 82-2-467-6789 |

| | |
|---------------|---|
| North America | 1-888-999-ATEN ext 4988 1-949-428-1111 |
|---------------|---|

User Notice

All information, documentation, and specifications contained in this manual are subject to change without prior notification by the manufacturer. The manufacturer makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties as to merchantability or fitness for any particular purpose. Any of the manufacturer's software described in this manual is sold or licensed *as is*. Should the programs prove defective following their purchase, the buyer (and not the manufacturer, its distributor, or its dealer), assumes the entire cost of all necessary servicing, repair and any incidental or consequential damages resulting from any defect in the software.

The manufacturer of this system is not responsible for any radio and/or TV interference caused by unauthorized modifications to this device. It is the responsibility of the user to correct such interference.

The manufacturer is not responsible for any damage incurred in the operation of this system if the correct operational voltage setting was not selected prior to operation. PLEASE VERIFY THAT THE VOLTAGE SETTING IS CORRECT BEFORE USE.

Product Information

For information about all ATEN products and how they can help you connect without limits, visit ATEN on the Web or contact an ATEN Authorized Reseller. Visit ATEN on the Web for a list of locations and telephone numbers:

| | |
|---------------|---|
| International | http://www.aten.com |
| North America | http://www.aten-usa.com |

Package Contents

Check to make sure that all the components are in working order. If you encounter any problem, please contact your dealer.

VE1812 Package Contents

- 1 VE1812T/R HDMI HDBaseT Extender with PoH
- 1 Power Adapter
- 1 IR Transmitter
- 1 IR Receiver*
- 2 RS-232 Terminal Blocks
- 1 User Instructions

VE1812T Package Contents

- 1 VE1812T HDMI HDBaseT Extender with PoH
- 1 Power Adapter
- 1 RS-232 Terminal Block
- 1 User Instructions

VE1812R Package Contents

- 1 VE1812R HDMI HDBaseT Extender with PoH
- 1 RS-232 Terminal Block
- 1 Power Adapter
- 1 User Instructions

Check to make sure that all the components are present and that nothing got damaged in shipping. If you encounter a problem, contact your dealer.

Read this manual thoroughly and follow the installation and operation procedures carefully to prevent any damage to the unit, and/or any of the devices connected to it.

Features may have been added to the VE1812 since this manual was published. Please visit our website to download the most up-to-date version of the manual.

Note: The included IR receiver supports full frequency IR signals from 30kHz to 60kHz. The IR receiver cable included with the package, however, only supports signals from 30kHz to 56 kHz.

Contents

| | |
|------------------------------------|------|
| Compliance Statements | ii |
| User Information | iii |
| Online Registration | iii |
| Telephone Support | iii |
| User Notice | iv |
| Product Information | iv |
| Package Contents | v |
| VE1812 Package Contents | v |
| VE1812T Package Contents | v |
| VE1812R Package Contents | v |
| About this Manual | vii |
| Conventions | viii |

1. Introduction

| | |
|--|---|
| Overview | 1 |
| Features | 2 |
| Requirements | 3 |
| Display | 3 |
| Source Device | 3 |
| Cables | 3 |
| Components | 4 |
| Transmitter Panel View | 4 |
| Receiver Front and Rear View | 5 |
| LED Display | 6 |
| Enabling the Long Reach Mode | 6 |

2. Hardware Setup

| | |
|---------------------------------------|----|
| Setting Up | 7 |
| Installation Diagram | 8 |
| RS-232 Channel Transmission | 10 |

Appendix

| | |
|---|----|
| Safety Instructions | 13 |
| General | 13 |
| Technical Support | 15 |
| International | 15 |
| North America | 15 |
| Specifications | 16 |
| ATEN Standard Warranty Policy | 18 |
| Limited Hardware Warranty | 18 |

About this Manual

This User Manual is provided to help you get the most from your system. It covers all aspects of installation, configuration and operation. An overview of the information found in the manual is provided below.

Chapter 1, Introduction, introduces you to the VE1812 system. Its purpose, features and benefits are presented, and its front and back panel components are described.

Chapter 2, Hardware Setup, describes the steps that are necessary to quickly and safely set up your installation.


An Appendix, provides specifications and other technical information regarding the VE1812.

Note:

- ◆ Read this manual thoroughly and follow the installation and operation procedures carefully to prevent any damage to the unit and/or connected devices.
 - ◆ The product may be updated, with features and functions added, improved, or removed since the release of this manual. For an up-to-date user manual, visit <http://www.aten.com/global/en/>.
-

Conventions

This manual uses the following conventions:

- `Monospaced` Indicates text that you should key in.
- [] Indicates keys you should press. For example, [Enter] means to press the **Enter** key. If keys need to be chorded, they appear together in the same bracket with a plus sign between them: [Ctrl+Alt].
1. Numbered lists represent procedures with sequential steps.
- ◆ Bullet lists provide information, but do not involve sequential steps.
- > Indicates selecting the option (on a menu or dialog box, for example), that comes next. For example, Start > Run means to open the *Start* menu, and then select *Run*.
-  Indicates critical information.

Chapter 1

Introduction

Overview

The VE1812 HDMI HDBaseT Extender with PoH is an ideal solution for connecting equipment in remote locations up to 100 m over a single Cat 5e / 6 / 6a cable. With Long Reach Mode enabled, the VE1812 can extend HDMI signals up to 150 m @ 1080p.

The VE1812 supports RS-232 and IR signaling pass-through, allowing users to control the HDMI source device from the receiver unit (VE1812R) while also accessing the HDMI display device from the transmitter unit (VE1812T). The IR signals can also be extended in both directions.

The VE1812 features Power over HDBaseT (PoH), which sends power from Tx to Rx over Cat 5e / 6 / 6a cable without any additional power supply. The VE1812 is HDMI (3D, Deep Color, 4K) and HDCP compatible.

When transmitting HDMI / 4K with a Cat 6a or ATEN 2L-2910 Cat 6 cable, the maximum distance reaches up to 100 m. The VE1812 is perfect for digital classrooms, video conference rooms, gaming or any installation that requires superior video quality.

Features

- ◆ HDBaseT Connectivity – extends an HDMI connection over a long distance via one Cat 5e/6/6a cable
- ◆ Superior video quality:
 - ◆ 4K up to 100 m over a Cat 6a or ATEN 2L-2910 Cat 6 cable
 - ◆ 1080p up to 150 m when in HDBaseT Long Reach Mode
- ◆
- ◆ HDBaseT Anti-jamming – resists signal interference during high-quality video transmission using HDBaseT technology
- ◆ PoH (Power over HDBaseT) – supplies power from Transmitter to Receiver over a long distance via one Cat 5e/6/6a cable
- ◆ Bi-directional RS-232 channel – allows users to connect to serial terminals or serial devices, such as touch screens and barcode scanners
- ◆ Bi-directional IR channel – two way IR protocol delivery by one IR port; IR transmission is processed one direction at a time
- ◆
- ◆ Rack-mountable

Requirements

Display

- ◆ An HDMI display capable of the highest required resolution

Source Device

- ◆ A source device with an HDMI port

Cables


- ◆ To connect the VE1812 transmitter and receiver units, we recommend using cables of Cat 5e/6/6a to ensure video quality.
- ◆ For better video quality, we strongly suggest using ATEN 2L-2910 Cat 6 cable.
- ◆ Maximum cable distances are as follows:

| Connection | Interface | Distance |
|---|-----------------|----------|
| Computer to Transmitter (VE1812T) | HDMI | 3 m |
| Transmitter (VE1812T) to Receiver (VE1812R) | Cat 5e / 6 / 6a | 100 m* |
| Receiver (VE1812R) to monitor | HDMI | 5 m |

Note: The maximum transmission distance using a Cat 5e/6/6a is 100m and 150m when Long Reach Mode is enabled.


Components

Transmitter Panel View

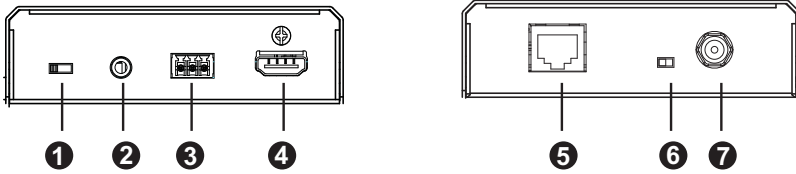

| No. | Component | Description |
|-----|--------------------------------|--|
| 1 | F/W Upgrade Switch | The Firmware upgrade port is reserved for tech support. If you would like to do a firmware upgrade yourself, please contact your dealer. |
| 2 | IR Port | Connect an IR Receiver to the IR port on the VE1812R. |
| 3 | RS-232 Port | You can connect RS-232 serial devices or peripherals to the VE1812, such as touchscreens and bar code scanners. |
| 4 | HDMI Input Port | Connect the HDMI Input Port on the VE1812T to the HDMI Output Port on the video source device using an HDMI cable. |
| 5 | HDBaseT Output Port | The Cat 5e/6/6a cables that connects the Receiver Units, plug in here. |
| 6 | HDBaseT Long Reach mode Switch | Use the dip switch to enable long reach mode. When long reach mode is enabled, signal transmission can be extended up to 150 m @ 1080p. |
| 7 | Power Jack | The cable from the Power adapter connects here. |


Receiver Front and Rear View

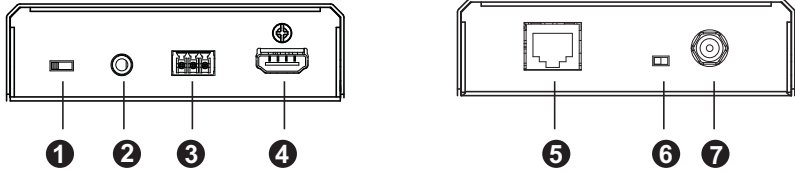

| No. | Component | Description |
|-----|--------------------------------|---|
| 1 | F/W Upgrade Switch | The Firmware upgrade port is reserved for tech support. If you would like to do a firmware upgrade yourself, please contact ATEN technical support. |
| 2 | IR Port | Connect an IR Transmitter to the IR port on the VE1812T. |
| 3 | RS-232 Port | You can connect the RS-232 main controller to the VE1812, such as the PC or Control system. |
| 4 | HDMI Output Port | Connect the HDMI display to this port. |
| 5 | HDBaseT Input Port | The Cat 5e/6/6a cable that connects to the Transmitter Unit plugs in here. |
| 6 | HDBaseT Long Reach mode Switch | Use the dip switch to enable long reach mode. When long reach mode is enabled, signal transmission can be extended up to 150 m @1080p. |
| 7 | Power Jack | The cable from the Power adapter connects here. |

LED Display

The VE1812 Transmitter and Receiver units have top panel LEDs to indicate their operating status, as shown in the table below:

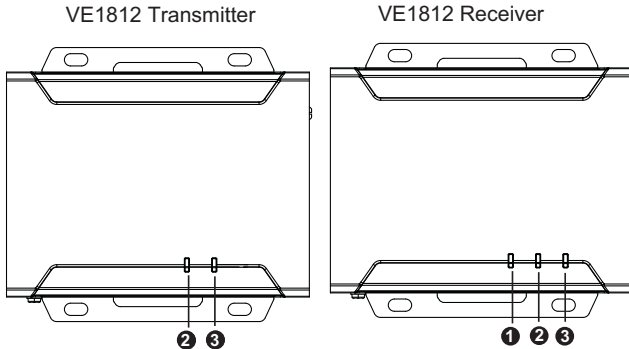

| No. | LED | Indication |
|-----|--------------------|--|
| 1 | HDMI Out* (Orange) | <ul style="list-style-type: none"> ◆ Light is static when HDMI display is normal with HDCP key. ◆ Flashes when HDMI display is normal without HDCP key. ◆ OFF when there is no HDMI signal. |
| 2 | Link (Orange) | Light is static to indicate that the connection to the Transmitter and Receiver units are stable. |
| 3 | Power (Green) | Lights to indicate that the system is receiving power. |

Note: The HDMI Out LED is available on VE1812R only.

Enabling the Long Reach Mode

Long Reach mode provides a more robust modulation where the transmission distance is extended while compromising on the maximum supported rate. If your system is not required to support video rates higher than 1080p, 24 bpp, 60 Hz, you may activate *Long Reach Mode* to enable longer cable reach of 150 meters with a Cat 5e/6/6a cable.

To enable the Long Reach mode, put the dip switch to **ON** at either the transmitter or the receiver.

Chapter 2

Hardware Setup




1. Please review important safety information regarding the placement of this device in *Safety Instructions*, page 13.
2. Make sure not to power on the VE1812 devices until all the necessary hardware is connected.

Setting Up

Setting up the VE1812 USB DVI KVMP™ Switch system is simply a matter of plugging in the cables. Make sure that all the equipment to be connected are powered off, then refer to the installation diagram on the next page and do the following:

1. Connect the HDMI Input port on the VE1812T to the HDMI Output port on your video source device using HDMI cable.
2. Connect one end of the RJ-45 cable to the HDBaseT Output port on the transmitter. Then connect the other end of the RJ-45 cable to the HDBaseT Input port on the receiver.
3. Connect the HDMI Output port on the VE1812R to the HDMI Input port on your video display device using HDMI Cable.
4. (Optional) Connect your computer or control system to the RS-232 terminal block on the VE1812.
5. (Optional) Connect an IR transmitter / receiver to the IR port on the VE1812.
6. Plug the power adapter cable into the power jack on the VE1812T.
7. (Optional) Plug the power adapter cable into the power jack on the VE1812R.


Installation Diagram

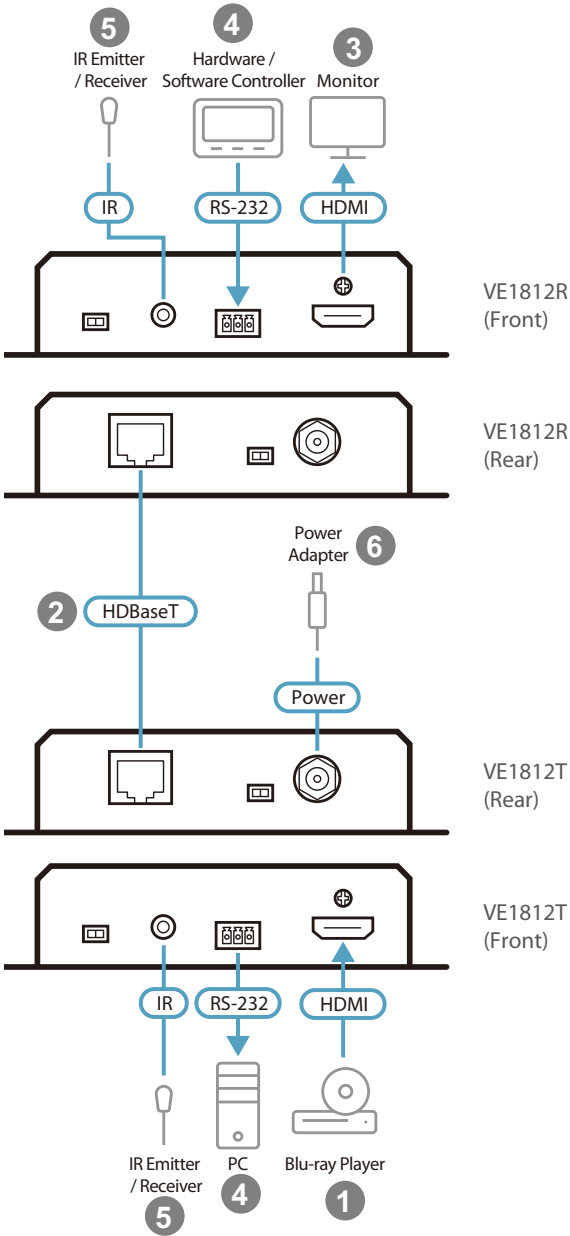

RS-232 Channel Transmission

You can connect RS-232 serial devices/peripherals to the VE1812, such as touchscreens and bar code scanners. The RS-232 signal transmission flow is shown in the following example:

From a source device, the RS-232 signal is transmitted (Tx) to the VE1812T receiving (Rx) unit; the VE1812R transmits (Tx) signals to the display device (Rx).

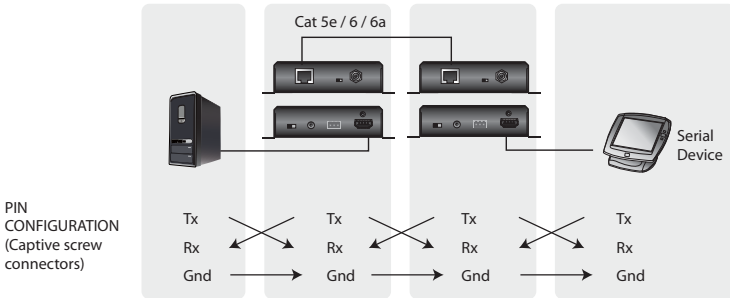

This Page Intentionally Left Blank

Safety Instructions

General

- ◆ Read all of these instructions. Save them for future reference.
- ◆ Follow all warnings and instructions marked on the device.
- ◆ This product is for indoor use only.
- ◆ Do not place the device on any unstable surface (cart, stand, table, etc.). If the device falls, serious damage will result.
- ◆ Do not use the device near water.
- ◆ Do not place the device near, or over, radiators or heat registers.
- ◆ The device cabinet is provided with slots and openings to allow for adequate ventilation. To ensure reliable operation, and to protect against overheating, these openings must never be blocked or covered.
- ◆ The device should never be placed on a soft surface (bed, sofa, rug, etc.) as this will block its ventilation openings. Likewise, the device should not be placed in a built in enclosure unless adequate ventilation has been provided.
- ◆ Never spill liquid of any kind on the device.
- ◆ Unplug the device from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
- ◆ The device should be operated from the type of power source indicated on the marking label. If you are not sure of the type of power available, consult your dealer or local power company.
- ◆ To prevent damage to your installation, it is important that all devices are properly grounded.
- ◆ Do not allow anything to rest on the power cord or cables. Route the power cord and cables so that they cannot be stepped on or tripped over.
- ◆ Position system cables and power cables carefully; Be sure that nothing rests on any cables.
- ◆ Never push objects of any kind into or through cabinet slots. They may touch dangerous voltage points or short out parts resulting in a risk of fire or electrical shock.
- ◆ Do not attempt to service the device yourself. Refer all servicing to qualified service personnel.

- ◆ If the following conditions occur, unplug the device from the wall outlet and bring it to qualified service personnel for repair.
 - ◆ The power cord or plug has become damaged or frayed.
 - ◆ Liquid has been spilled into the device.
 - ◆ The device has been exposed to rain or water.
 - ◆ The device has been dropped, or the cabinet has been damaged.
 - ◆ The device exhibits a distinct change in performance, indicating a need for service.
 - ◆ The device does not operate normally when the operating instructions are followed.
- ◆ Only adjust those controls that are covered in the operating instructions. Improper adjustment of other controls may result in damage that will require extensive work by a qualified technician to repair.
- ◆ This product is for indoor use only.

Technical Support

International

- ◆ For online technical support – including troubleshooting, documentation, and software updates: <http://eservice.aten.com>
- ◆ For telephone support, see *Telephone Support*, page iii.

North America

| | | |
|--------------------------|--|---|
| Email Support | | support@aten-usa.com |
| Online Technical Support | Troubleshooting Documentation Software Updates | http://www.aten-usa.com/support |
| Telephone Support | | 1-888-999-ATEN ext. 4988 |

When you contact us, please have the following information ready beforehand:

- ◆ Product model number, serial number, and date of purchase
- ◆ Your computer configuration, including operating system, revision level, expansion cards, and software
- ◆ Any error messages displayed at the time the error occurred
- ◆ The sequence of operations that led up to the error
- ◆ Any other information you feel may be of help

Specifications

| Function | VE1812R | VE1812T |
|------------------------------|--|--------------------------------|
| Video Input | | |
| Interfaces | N/A | 1 x HDMI Type A Female (Black) |
| Impedance | N/A | 100W |
| Max. Distance | N/A | 3 m |
| Video Output | | |
| Interfaces | 1 x HDMI Type A Female (Black) | N/A |
| Impedance | 100 Ω | N/A |
| Max. Distance | 3 m | N/A |
| Video | | |
| Max. Data Rate | 10.2Gbps (3.4Gbps per lane) | |
| Max. Pixel Clock | 340 MHz | |
| Compliance | HDMI (3D, Deep Color, 4K) HDCP Compatible Consumer Electronics Control (CEC) | |
| Max. resolutions / Distances | Up to: <ul style="list-style-type: none"> ◆ 4K@70m (Cat 5e/6) / 100m (Cat 6a / ATEN 2L-2910 Cat 6) ◆ 1080p@100m (Cat 5e/6/6a) 4K supported: <ul style="list-style-type: none"> ◆ 4069 x 2160 / 3840 x 2160 @ 60Hz (4:2:0) ◆ 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4) | |
| Audio | | |
| Input | N/A | 1 x HDMI Type A Female (Black) |
| Output | 1 x HDMI Type A Female (Black) | N/A |

| Function | | VE1812R | VE1812T |
|--|---|--|-------------------|
| Control | | | |
| RS-232 | Connector | 1 x Terminal Block, 3 pole | |
| | Baud Rate | 19200 | |
| | Data Bits | 8 | |
| | Stop Bits | 1, no parity and flow control | |
| IR | | 1 x Mini Stereo Jack Female (Black) | |
| Switches | | | |
| Long Reach Mode Switch | | 1 x Slide Switch - ON/OFF | |
| Firmware Upgrade | | 1 x Slide Switch - ON/OFF | |
| Power | | | |
| Connectors | 1 x DC Jack (Black) with locking or 1 x RJ-45 (Power over HDBaseT, PoH) | 1 x DC Jack (Black) with locking | |
| Consumption | DC5V: 4.26W:20BTU POH: 5.33W:25BTU | DC5V: 3.2W:15BTU | |
| Environment | | | |
| Operating Temperature | | 0 - 40°C | |
| Storage Temperature | | -20 - 60°C | |
| Humidity | | 0 - 80% RH, Non-Condensing | |
| Physical Properties | | | |
| Housing | | Metal | |
| Weight | | 0.45 Kg (0.99 lb) | 0.47 Kg (1.04 lb) |
| Dimensions (L x W x H) with bracket | | 14.04 x 12.30 x 3.00 cm (5.53 x 4.84 x 1.18 in.) | |
| Dimensions (L x W x H) without bracket | | 13.60 x 10.10 x 2.90 cm (5.35 x 3.98 x 1.14 in.) | |

ATEN Standard Warranty Policy

Limited Hardware Warranty

ATEN warrants its hardware in the country of purchase against flaws in materials and workmanship for a Warranty Period of two [2] years (warranty period may vary in certain regions/countries) commencing on the date of original purchase. This warranty period includes the [LCD panel of ATEN LCD KVM switches](#). For UPS products, the device warranty is two [2] years but battery is one [1] year. Select products are warranted for an additional year (see [A+ Warranty](#) for further details). Cables and accessories are not covered by the Standard Warranty.

What is covered by the Limited Hardware Warranty

ATEN will provide a repair service, without charge, during the Warranty Period. If a product is defective, ATEN will, at its discretion, have the option to (1) repair said product with new or repaired components, or (2) replace the entire product with an identical product or with a similar product which fulfills the same function as the defective product. Replaced products assume the warranty of the original product for the remaining period or a period of 90 days, whichever is longer. When the products or components are replaced, the replacing articles shall become customer property and the replaced articles shall become the property of ATEN.

To learn more about our warranty policies, please visit our website:

<http://www.aten.com/global/en/legal/policies/warranty-policy/>

© Copyright 2023 ATEN® International Co., Ltd.
Released: 2023-10-13

ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd. All rights reserved. All other brand names and trademarks are the registered property of their respective owners.