

OXEO CF FIRE EXTINGUISHING SYSTEM


TABLE 1 OXEO EQUIPMENT

DESIGNATION	PART NO.
PRESSURE GAUGE	2901 psi (200 bar) NO under pressure 927612
	2901 psi (200 bar) NC under pressure 927615
	4351 psi (300 bar) NO under pressure 927616
	4351 psi (300 bar) NC under pressure 927617
AGENT DISCHARGE HOSE KIT INCLUDES HOSE, REGULATOR, AND GASKETS	14 3/4" LENGTH 25763
	23 1/2" LENGTH (CUSTOM ORDER ONLY) 25764
	2 OUTLET (30L & 80L) 25759
MANIFOLD	3 OUTLET (30L & 80L) 25760
	2 OUTLET (140L) 26705
	3 OUTLET (140L) 26713
CHECK VALVE	886030
CHECK VALVE ADAPTER 3/4" BSP7-NPT (IF CUSTOMER BUILDS CF MANIFOLD)	4092K24
RELEASE DEVICE	ELECTRIC/SOLENOID 914027D
	MANUAL 914028
ELECTRICAL RELEASE/SOLENOID RESET TOOL	2" (PILOT LINES) 26408
	5.12" (AGENT DISCHARGE HOSE) 26412
HOSE RADIUS CHECK TOOLS	20" 24467
	39" 24468
PILOT HOSE	59" 24469
	20" 25132
PILOT HOSE KIT (NOT PICTURED) INCLUDES ADAPTER & TEE	39" 25133
	59" 25134
	125566
PILOT HOSE ADAPTOR	912487
PILOT HOSE TEE	125920
PILOT HOSE COUPLING (NOT PICTURED)	24498
PILOT HOSE PRESSURE RELIEF	24499
ELECTRICAL REL. MONITOR SWITCH	930865D
MANIFOLD PRESSURE RELIEF	888007D

TABLE 2 OXEO NOZZLES ¹⁾

NOZZLE	VERSION	BORE DIAMETER	PART NO.	WRENCH	
1 1/2"	180"	0.118-0.492 in.	934164D-XXXX	25099	
	3/4"	180"	0.413-0.669 in.	934165D-XXXX	25100
	1"	180"	0.591-0.827 in.	934166D-XXXX	25101
	1 1/4"	180"	0.709-1.063 in.	934167D-XXXX	25232
1 1/2"	180"	0.945-1.299 in.	934168D-XXXX	25233	
1 1/2"	360"	0.118-0.492 in.	918745D-XXXX	25099	
	3/4"	360"	0.413-0.669 in.	918746D-XXXX	25100
	1"	360"	0.591-0.827 in.	918747D-XXXX	25101
	1 1/4"	360"	0.709-1.063 in.	918748D-XXXX	25232
1 1/2"	360"	0.945-1.299 in.	918749D-XXXX	25233	

¹⁾ NOZZLE ORIFICE SIZES ARE INDICATED BY A 4 DIGIT SUFFIX AFTER THE PART NUMBER. SEE TECH DATA FOR LIST OF AVAILABLE ORIFICE SIZES AND ORDER NUMBERS.
EXAMPLE: 934164-0118 WOULD BE A NOZZLE WITH ORIFICE PLATE DIAMETER OF 0.118 INCHES.



VV NOZZLE

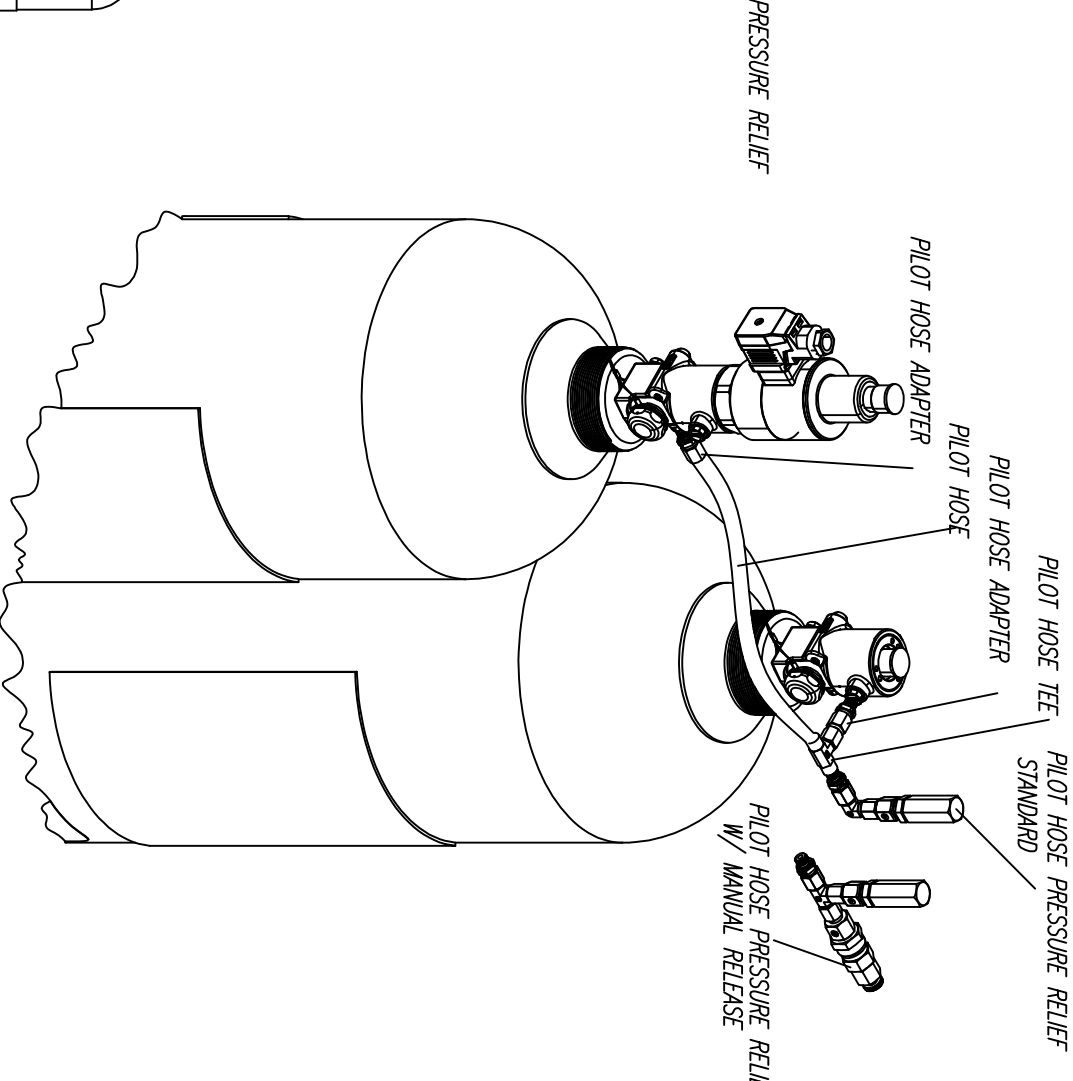
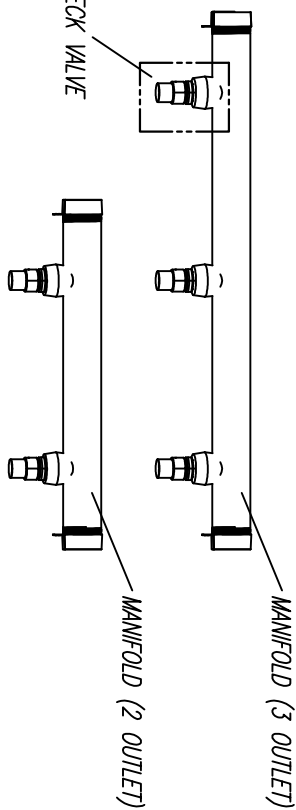
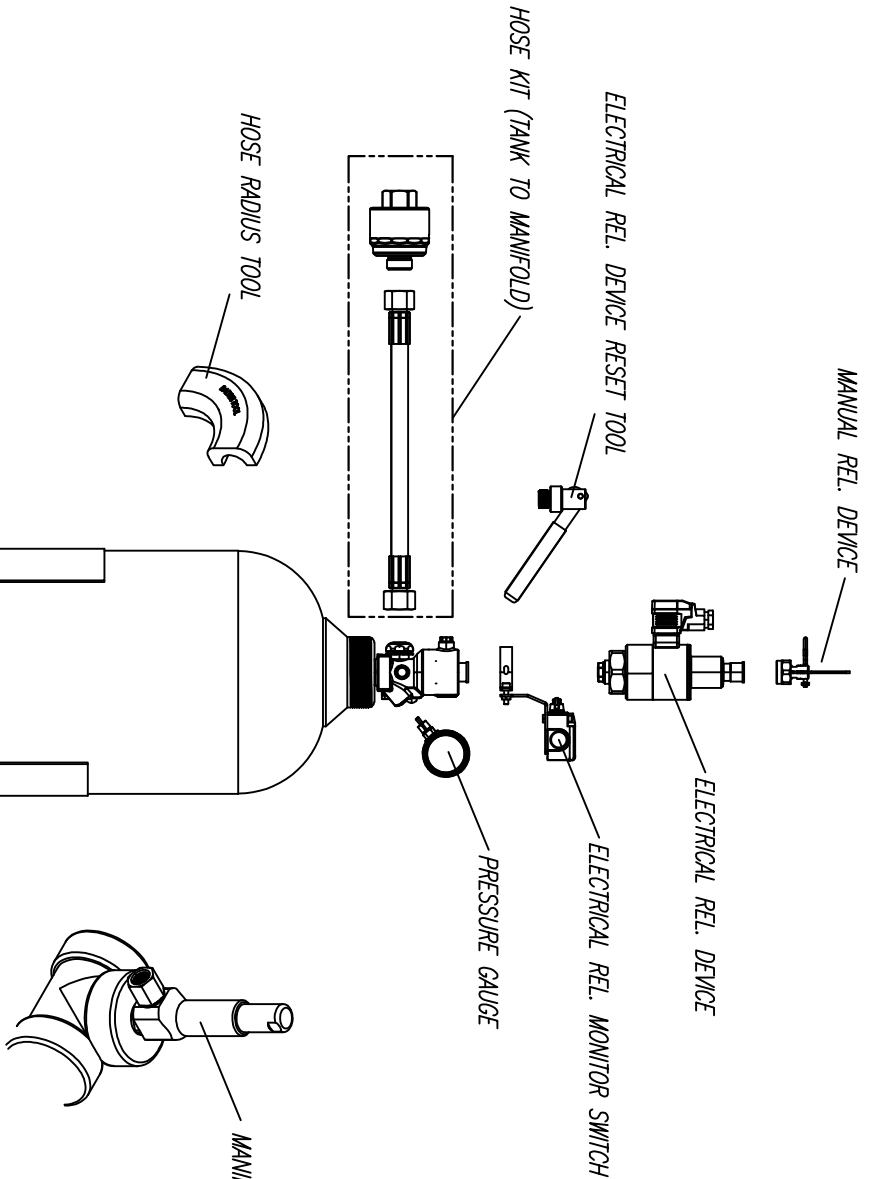


TABLE 3 OXEO CYLINDER DIMENSIONS ^{3) 4)}

PART NO.	APPROX. AGENT FILL	AGENT	A (in.)	B (in.)	C (in.)	PRESSURE AT 59° F (15° C)	VOLUME (L)	APPROX. EMPTY WEIGHT
4001054	95.4 lb	IG-100	81.7	70.4	14.0	4351 PSI/300 BAR	140	406 lbs
4001034	157.9 lb	IG-01	81.7	70.4	14.0	4351 PSI/300 BAR	140	406 lbs
4001044	39.5 lb	IG-100	75.0	63.7	11.3	2901 PSI/200 BAR	80	265 lbs
4001050	54.5 lb	IG-100	75.0	63.7	11.3	4351 PSI/300 BAR	80	265 lbs
4001024	63.2 lb	IG-01	75.0	63.7	11.3	2901 PSI/200 BAR	80	265 lbs
4001030	90.2 lb	IG-01	75.0	63.7	11.3	4351 PSI/300 BAR	80	265 lbs
4001044	14.8 lb	IG-100	42.4	31.1	10.5	2901 PSI/200 BAR	30	115 lbs
4001050	20.4 lb	IG-100	42.4	31.1	10.5	4351 PSI/300 BAR	30	115 lbs
4001024	23.7 lb	IG-01	42.4	31.1	10.5	2901 PSI/200 BAR	30	115 lbs
4001030	33.8 lb	IG-01	42.4	31.1	10.5	4351 PSI/300 BAR	30	115 lbs

³⁾ ALL DIMENSIONS ARE APPROXIMATE, VARIATIONS DUE TO MANUFACTURING TOLERANCES ARE POSSIBLE.
⁴⁾ FOR TANKS WITH CANADIAN LABELING ADD A "C" TO THE END OF THE TANK PART NUMBER