


24AWG Category 6+ Ultra UTP Cable UL Verified

Part Number: PROCAT6LITE

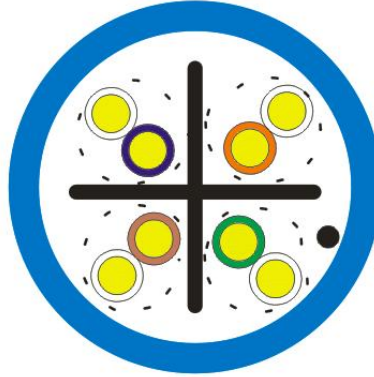

Application

Voice, Data, Security and Video Applications.
IP Megapixel CCTV/Analog Installations
Wire Access Points
Gigabit Video/data installations
Long distance PoE feeding
550MHz Broadband Video Voice, T1, ISDN

Standards

ANSI EIA/TIA 568 C.2;
ISO/IEC 11801 2nd Edition; IEC 61156-5
EN 50173; EN 50288-3-1
IEEE 802.3at
UL - E472815

Construction

Conductor	Bare copper wire (Ultra AWG24)
Insulation	Polyethylene, $\varnothing 0.52 \pm 0.005$ mm
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core
Insulation Color	Blue/White-Blue, Orange/white-Orange, Green/white-Green, Brown/white-Brown
Sheath	PVC Blue RAL 5015
Diameter	5.7 ± 0.2 mm

Mechanical properties

Minimum bending radius	Installation	8 x D
Temperature range	Installed during operation	4 x D
Fluke Permanent Link	during installation	-20 °C ~ + 60 °C
	Up To 90 Meters	0 °C ~ + 50 °C

Electrical properties @ 20°C

Dielectric strength	2.5 KV dc-2 seconds
Conductor resistance	Max 8.50 ohm/100M at 20°C
Max. Ring resistance	16.8 Ohm/100M at 20°C
Max. Mutual capacitance	56 pF/M
Max. Capacity unbalance	330 pF/100M
Mean characteristic impedance	100 ± 15 Ω between 1Mhz to 100Mhz
Nominal velocity of propagation	approx. 67 %
Propagation delay	Nominal 535 ns/100m
Delay skew	Nominal 20 ns/100m
Test voltage (DC, 1 min)	1000 V
Core/Core Coupling attenuation	≥ 40 dB

Nominal transmission characteristics @ 20°C

Freq. (Mhz)	ATT (dB/100m)	RL (dB)	PS.NEXT (dB/100m)	PS.NEXT (dB/100m)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)
	TIA(1)	TIA(1)	TIA(1)	TIA(1)	TIA(1)	TIA(1)
1	2.03	20.00	74.30	72.30	67.80	64.8
4	3.78	23.01	65.27	63.27	55.76	52.76
10	5.95	25.00	59.30	57.30	47.80	44.80
16	7.55	25.00	56.24	54.24	43.72	40.72
20	8.47	25.00	54.78	52.78	41.78	38.78
25	9.51	24.32	53.33	51.33	39.84	36.84
31.25	10.67	23.64	51.88	49.88	37.90	34.90
62.5	15.38	21.54	47.36	45.36	31.88	28.88
100	19.80	20.11	44.30	42.30	27.80	24.80
125	22.36	19.43	42.85	40.85	25.86	22.86
200	28.98	18.00	39.78	37.78	21.78	18.78
250	32.85	17.32	38.33	36.33	19.84	16.84
300	-	-	-	-	-	-
350	-	-	-	-	-	-

*Frequency above 250Mhz are for information only, values may vary without prior notice.

© SYSCOM, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Syscom: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Syscom. The information is believed to be correct at the time of issue. Syscom reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Syscom.