


Φ200mm RYG Full Ball Traffic Lights

Model No. : PROLIGHTLEDT



Connection Sketch

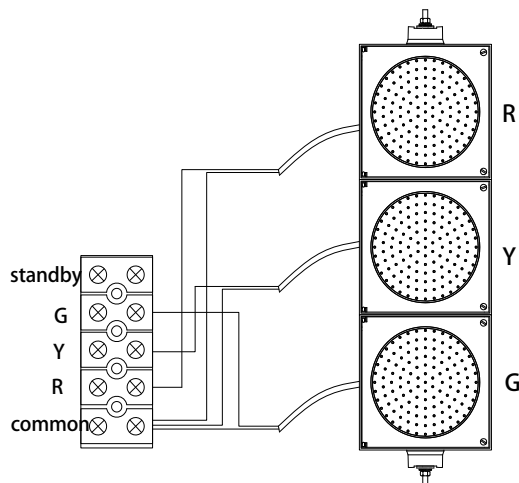

Black: Common
 red: red light
 yellow: yellow light
 green : green light

Product Photo



Product Features

- Novelty design with beautiful appearance
- Low power consumption
- High efficiency and brightness
- Large viewing angle
- Long lifespan-more than 80,000 hours
- Multi-layer sealed and waterproof
- Exclusive optical lensing and good color uniformity
- Long viewing distance
- Keep up with CE, GB14887-2007, ITE EN12368 and relevant international standards

Technical Parameters:

Color	LED Qty	Light Intensity	Wave length	Viewing angle		Power	Working Voltage	Housing Material
				L/ R	U/D			
Red	90pcs	≥400cd	625±5nm	30°	30°	≤9W	12/24VDC; 85V-265VAC, 50/60HZ	PC UV resistant
Yellow	90pcs	≥600cd	590±5nm	30°	30°	≤9W		
Green	90pcs	≥600cd	505±5nm	30°	30°	≤9W		


Packing Info. :

Carton size	QTY	GW	NW	Wrapper	Volume(m3)
0.91*0.33*0.23 m	1pcs/carton	8 KGS	6.86 KGS	K=K Carton	0.07

Packing List :

Name	Light	L Bracket	Sun visor	M4×10 Screw	M4×20 Screw	Wiring Box and Gasket	Using manual	Certificate
Qty.(pcs)	1	2	3	12	4	1	1	1

Installation Sketch

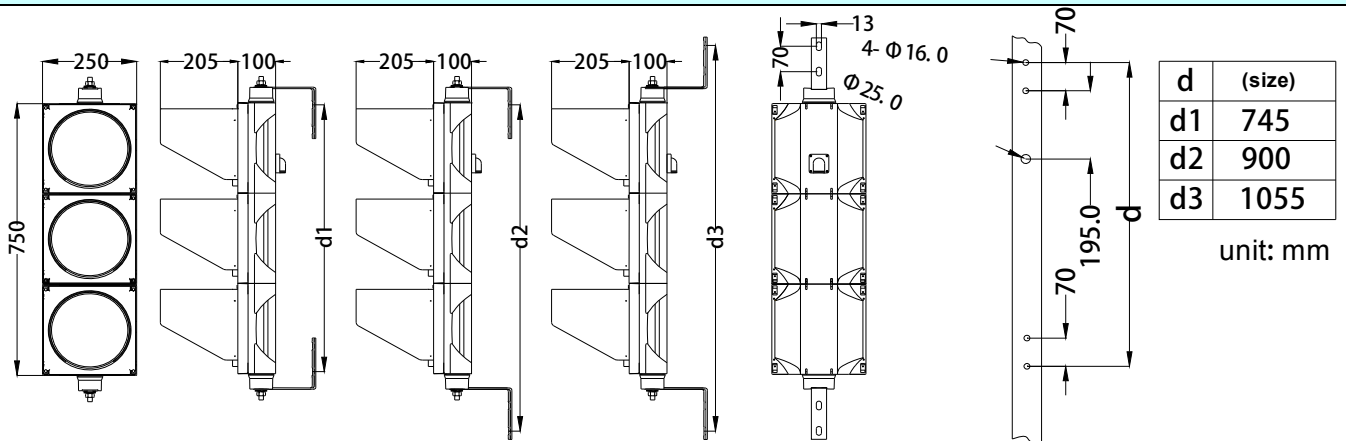

d	(size)
d1	745
d2	900
d3	1055

unit: mm

Elevation

right view(1)

right view(2)


right view(3)

back view

Light pole Installation Holes Chart

AccessPRO[®]

Vertical installation

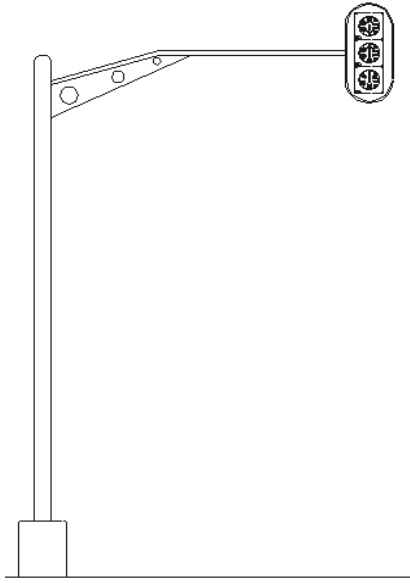

Horizontal installation

