



HG6244C

GPON Optical Network Unit

Product Manual

Version: A

FiberHome Telecommunication Technologies Co., Ltd.

October 2018

Thank you for choosing our products.

We appreciate your business. Your satisfaction is our goal. We will provide you with comprehensive technical support and after-sales service. Please contact your local sales representative, service representative or distributor for any help needed at the contact information shown below.

Fiberhome Telecommunication Technologies Co., Ltd.

Address: No. 67, Guanggu Chuangye Jie, Wuhan, Hubei, China

Zip code: 430073

Tel: +6 03 7960 0860/0884 (for Malaysia)

+91 98 9985 5448 (for South Asia)

+593 4 501 4529 (for South America)

Fax: +86 27 8717 8521

Website: <http://www.fiberhomegroup.com>

Legal Notice

烽火通信®

FiberHome®

GONST®

FONST®

e-Fim®

CiTRANS®

E-jet®

IBAS®

Freelink®

FonWeaver®

OTNPlanner™

SmartWeaver™

are trademarks of FiberHome Telecommunication Technologies Co., Ltd.
(Hereinafter referred to as FiberHome)

All brand names and product names used in this document are used for identification purposes only and are trademarks or registered trademarks of their respective holders.

All rights reserved

No part of this document (including the electronic version) may be reproduced or transmitted in any form or by any means without prior written permission from FiberHome.

Information in this document is subject to change without notice.

Safety Precautions

For your correct and safe operations on the equipment, please carefully read and strictly observe the following safety instructions:

- ◆ High optical power can cause bodily harm, especially to eyes. Never look directly into the end of the optical transmitter fiber jumper or the end of its active connector.
- ◆ Exercise care if you must bend fibers. If bends are necessary, the fiber bending radius should never be less than 38mm.
- ◆ Overloaded power sockets or damaged cables and connectors may cause electric shock or fire. Regularly check related electric cables. If any of them is damaged, replace it immediately.
- ◆ Use the power supply adapter provided in the package only. Using other adapters may cause equipment damage or operation failures.
- ◆ Install the equipment in a well ventilated environment without high temperature or direct sunlight to protect the equipment and its components from overheating, which can result in damage.
- ◆ Disconnect the power in lightning weather and disconnect all the wires and cables on the device (such as the power cable, network cable and phone cable), so as to prevent device from being damaged by lightning.
- ◆ Do not place this equipment in damp or near moisture environment. Water will lead to abnormal operation of device and even the danger caused by short circuit.
- ◆ Do not lay this equipment on an unsteady base.

Contents

Safety Precautions.....	1
1 Documentation Guide	1
2 Product Introduction.....	2
2.1 Product Positioning.....	3
2.2 Product Specifications	3
2.3 Interface Specifications.....	4
2.3.1 GPON Interface	4
2.3.2 LAN Interface.....	4
2.3.3 POTS Interface.....	5
2.3.4 Wi-Fi Interface	5
2.3.5 USB Interface	6
2.4 Introduction to the HG6244C.....	6
2.4.1 Appearance.....	6
2.4.2 Product Characteristics.....	10
2.4.3 Functions and Features	12
2.4.4 Technical Specifications.....	16
3 Web Configuration Guide.....	17
3.1 Logging into Web Configuration GUI Locally.....	18
3.2 Status.....	24
3.2.1 Device Information.....	25
3.2.2 Wireless Network Status	25
3.2.3 WAN Side Status	26
3.2.4 LAN Side Status	27
3.2.5 Optical Power Status	28
3.2.6 Voice Status	28
3.3 Network.....	29
3.3.1 WLAN Settings	29
3.3.2 LAN Settings	34
3.3.3 Broadband Settings	36

	3.3.4	DHCP Server.....	39
	3.3.5	Authentication Setting	41
	3.3.6	Voice Configuration.....	42
3.4		Security	49
	3.4.1	Firewall.....	49
	3.4.2	Remote Control	60
	3.4.3	Dynamic DoS	60
	3.4.4	HTTPS	61
3.5		Application.....	62
	3.5.1	DDNS.....	62
	3.5.2	Port Forwarding	63
	3.5.3	NAT	64
	3.5.4	UPnP	65
	3.5.5	DMZ	66
	3.5.6	Network Diagnosis.....	66
3.6		Management	67
	3.6.1	Account Management.....	67
	3.6.2	Device Management.....	69
	3.6.3	Log Management.....	73
4		Handling Common Problems	75
	4.1	Power Status Indicator LED Extinguished.....	76
	4.2	Register Status Indicator LED Extinguished	76
	4.3	Optical Signal Status Indicator LED Blinking.....	76
	4.4	Ethernet Interface Status Indicator LED Extinguished	76
	4.5	Failing to Access Local Web Login GUI and Failing to Ping 192.168.1.1	77
	4.6	Failing to Access Internet Using the LAN Port.....	77
	4.7	Measured Internet Access Rate Lower or Higher Than The Standard Value	77
	4.8	Connection to IPTV Failed	78
	4.9	IPTV Picture Suspended.....	78
	4.10	Test of Voice Service Failed	78
5		Standards and Protocols.....	79

Appendix A	Abbreviations	81
------------	---------------------	----

1 Documentation Guide

Document Orientation

HG6244C Product Manual introduces the positioning, features, functions, technical specifications of the ONT (Optical Network Terminal) product HG6244C as well as Web configurations and handling of common problems, so that readers can have an overall knowledge about the HG6244C.

Intended Readers

- ◆ Marketing personnel
- ◆ Commissioning engineers
- ◆ Operation and maintenance engineers

Version Information

Version	Version Information
A	Initial version

Content

Chapter	Content
Product Introduction	<ul style="list-style-type: none">◆ Product positioning◆ Product specifications◆ Interface specifications◆ Introduction to the HG6244C
Web Configuration Guide	<ul style="list-style-type: none">◆ Logging into Web configuration GUI locally◆ Status◆ Network◆ Security◆ Application◆ Management
Handling Common Problems	Introduces how to handle common problems encountered during product operation and service test, including abnormal status of indicator LEDs, failing to access the Internet, failure of voice service test, etc.
Standards and Protocols	International standards and communications protocols

2 Product Introduction

- Product Positioning
- Product Specifications
- Interface Specifications
- Introduction to the HG6244C

2.1 Product Positioning

The HG6244C is an FTTH-type GPON ONT. It provides users with communication and entertainment services in the form of data, voice, video, and so on, to meet the integrated access demand of families and small-scaled enterprises.

See Figure 2-1 for the network positioning of the HG6244C.

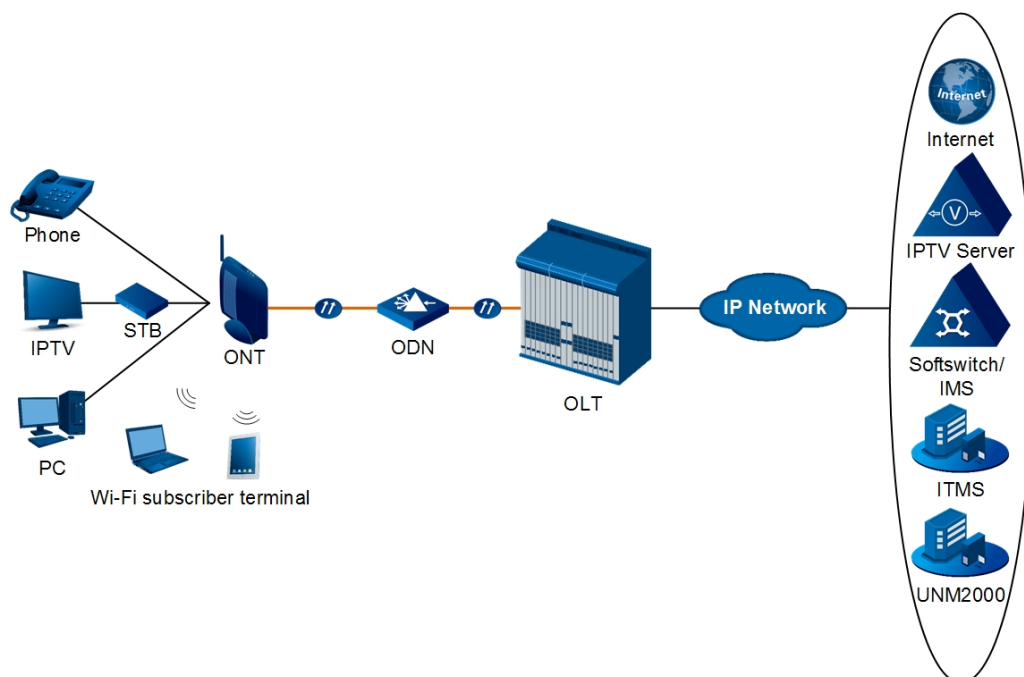


Figure 2-1 Network Application of the HG6244C

2.2 Product Specifications

The tables below list the interfaces on the HG6244C and the services supported by the ONT for users' reference on ONT configuration.

Table 2-1 lists the interfaces supported by the HG6244C.

Table 2-1 Interfaces Supported by the HG6244C

ONT Type	Ethernet Interface Quantity	POTS Interface Quantity	Wi-Fi Interface	USB Interface Quantity	CATV Interface Quantity
HG6244C	4 (GE)	2	√	1	1

Table 2-2 lists the service types supported by the HG6244C.

Table 2-2 Service Types Supported by the HG6244C

ONT Type	Internet Service	Multicast Service	Voice Service	Wi-Fi Service
HG6244C	√	√	√	√
Note: “√” indicates “supported”; “x” indicates “not supported”.				

Service Reliability

The HG6244C supports MTBF up to 30 000 hours.

2.3 Interface Specifications

2.3.1 GPON Interface

See Table 2-3 for the specifications of the GPON interface.

Table 2-3 GPON Interface Specifications

Parameter	Specification
Standard compliance	ITU-T G.984, Class B+
Transmission rate	Rx: 2.5 Gbit/s; Tx: 1.25 Gbit/s
Interface mode	Single-mode
Interface type	SC/APC
Maximum transmission distance	20 km
Central wavelength	Tx: 1310 nm; Rx: 1490 nm
Optical power	Tx optical power: 0.5 dBm to 5.0 dBm Rx optical power: -8 dBm to -29 dBm
Extinction ratio	More than 10 dB
Receiving sensitivity	-27 dBm to -29 dBm
Maximum overload optical power	-8 dBm

2.3.2 LAN Interface

Table 2-4 shows the specifications of the LAN interface.

Table 2-4 LAN Interface Specifications

Parameter	Specification
Standard compliance	IEEE 802.3ab
Interface type	RJ-45
Interface rate	10 Mbit/s, 100 Mbit/s or 1000 Mbit/s
Maximum transmission distance	100m
Working mode	Supports full-duplex or half-duplex and 10/100/1000 M auto negotiation.
Specifications of the cable used	CAT-5 unshielded twisted pair

2.3.3 POTS Interface

Table 2-5 shows the specifications of the POTS interface.

Table 2-5 POTS Interface Specifications

Parameter	Specification
Interface type	RJ-11
Transmission rate	64 Kbit/s
Cable type	Twisted-pair cable
Line code	PCM

2.3.4 Wi-Fi Interface

Item	Specification
Standard compliance	IEEE 802.11 b/g/n
Operating band	2.4GHz
Specifications	Four SSIDs and 13 working channels for the 2.4 GHz band. Automatic rate adjustment and launched power adjustment for the 2.4GHz band.
Authentication mode	OPEN, SHARED, WPA-PSK, WPA2-PSK and WPA-PSK/WPA2-PSK
Encryption mode	WEP, TKIP, AES and TKIP / AES

2.3.5 USB Interface

Table 2-6 shows the specifications of the USB interface.

Table 2-6 USB Interface Specifications

Parameter	Specification
Standard compliance	USB2.0 / USB1.1
Transmission rate	20 MB/s

2.4 Introduction to the HG6244C

2.4.1 Appearance

The following describes the appearance of the HG6244C, including the overall look, interfaces, buttons, and indicator LEDs.



Note:

The pictures here are only for reference.

Appearance

The overall appearance of the HG6244C is shown in Figure 2-2.



Figure 2-2 Overall Appearance of the HG6244C

Interface and Button

Interfaces and buttons of the HG6244C are located on the rear, side and back panels of the equipment. Figure 2-3 shows the rear panel, Figure 2-4 shows the side panel, and Figure 2-5 shows the back panel.



Figure 2-3 Rear Panel of the HG6244C



Figure 2-4 Side Panel of the HG6244C

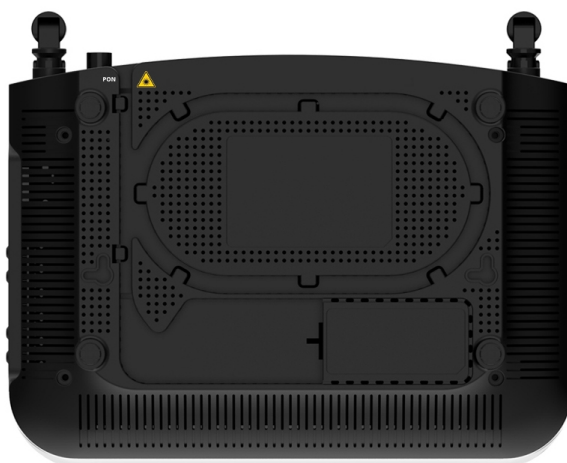


Figure 2-5 Back Panel of the HG6244C

Table 2-7 describes the interfaces and buttons of the HG6244C.

Table 2-7 Interfaces and Buttons of the HG6244C

Interface and Button	Description	Function
CATV (rear panel)	CATV interface	Connects to the TV set.
LAN1 to LAN4	Ethernet interface	Connects with the computer, IP router or IP set top box.
Phone1, Phone2	Telephone interface	Connects to the user's telephone.
ON/OFF	Power switch	Turns on or off the power for the equipment.
Power	Power interface	Connects with the power adapter.
Reset	Reboot button	Pressing down the button for no more than 5 seconds to reboot the equipment; pressing down the button for more than 5 seconds to restore the factory settings and reboot the equipment.
CATV (side panel)	CATV switch	Enables or disables the CATV function.
USB	USB Host interface	Connects to the USB interface storage device.
PON	Fiber interface	Connects with optical fiber for uplink access.
WLAN	WLAN function button	Enables / disables the WLAN function.
WPS	WPS function button	Enables / disables WLAN data encryption.

Indicator LED Description

Indicator LEDs of the HG6244C are located on the front panel of the equipment.

Table 2-8 describes the indicator LEDs.

Table 2-8 Indicator LEDs on the HG6244C

Indicator LEDs	Meaning	Color	Status	Status Description
Power	Power status indicator LED	Green	ON	The equipment is powered on.
			OFF	The equipment is not powered on.
PON	Register status indicator LED	Green	ON	The ONT is activated.
			Blinking	The ONT is being activated.
			OFF	Activation of the ONT is not yet started.
LOS	Optical signal status indicator LED	Red	Blinking	The equipment has not received the optical signal.
			OFF	The equipment has received the optical signal.
VOIP	Voice service register status indicator LED	Green	ON	The equipment is registered in the softswitch system.
			OFF	The equipment is not registered in the softswitch system.
Phone1, Phone2	Phone port status indicator LED	Green	ON	The port is registered in the softswitch system.
			Blinking	Service flow is found at the port.
			OFF	The port is not registered in the softswitch system.
LAN1 to LAN4	Ethernet interface status indicator LED	Green	ON	The interface is connected to the user terminal and no data is transmitted.
			Blinking	The interface is transmitting / receiving data.
			OFF	The interface is not connected to the user terminal.
CATV	CATV interface status indicator LED	Green	ON	The CATV function is enabled and the CATV signal can be received normally.
			Blinking	The CATV function is enabled and the CATV signal is weak.
			OFF	The CATV function is disabled, and the CATV signal can not be received or the signal is weak.
WLAN	Wireless signal status indicator LED	Green	ON	The wireless interface is enabled.
			Blinking	The wireless interface is transmitting / receiving data.
			OFF	The wireless interface is disabled.

Table 2-8 Indicator LEDs on the HG6244C (Continued)

Indicator LEDs	Meaning	Color	Status	Status Description
WPS	WPS status indicator LED	Green	ON	WPS is enabled, and the Wi-Fi terminal has been connected to the ONT.
			Blinking	WPS is in use for relevant negotiation.
			OFF	WPS is not enabled, or the Wi-Fi terminal is not connected to the ONT.
USB	USB indicator LED	Green	ON	The USB is connected.
			OFF	The USB is not connected.
Internet	Broadband network status indicator LED	Green	ON	Connection to the broadband network is normal.
			Blinking	Connection to the broadband network is normal with data transmission.
			OFF	Not connected to the broadband network.

2.4.2 Product Characteristics

The HG6244C can be used together with the OLT equipment to make up a GPON system and access multiple services for users. The HG6244C has the following characteristics:

1. GPON access capability

- ◆ Conforms to ITU-T G.984 series of standards, with good interoperability.
- ◆ Provides large-capacity GPON transmission bandwidth: supports 2.5 Gbit/s for the downlink rate and 1.25 Gbit/s for the uplink rate.
- ◆ Supports the DBA (Dynamic Bandwidth Allocation) algorithm.
- ◆ Supports long-haul transmission. The maximum transmission distance can reach 20 km.

2. Abundant service types

The equipment provides abundant physical interfaces on the subscriber side to access multiple services such as Internet access, video, voice, IPTV and home storage services.

3. Wi-Fi Wireless Access

- ◆ Provides Wi-Fi wireless access based on IEEE 802.11 b/g/n to help users set up a safe and reliable wireless network.
- ◆ Compatible with IEEE 802.11 b/g/n and authenticated by Wi-Fi Alliance, with good compatibility with other WLAN devices.
- ◆ Supports four SSIDs so that users can set different wireless networks as needed.
- ◆ Supports multiple authentication and encryption modes to provide users with safe and reliable wireless access approaches.

3. Network storage and file sharing

- ◆ Provides a USB interface for connection with the USB interface storage device to provide convenient network storage and file sharing service.
- ◆ The USB interface supports plug-and-play and hot insertion.
- ◆ Supports configuration of the USB function based on the Web page to facilitate file sharing in the family network.
- ◆ Supports the FTP-based network storage to provide FTP client end and FTP server end functions. Users can download the files on the public network FTP server to the USB interface storage device or visit the USB interface storage device on the ONT via the FTP client end on the PC.

4. Gateway functions

- ◆ Serves as home gateway and provides abundant and reliable gateway functions.
- ◆ Functions as the DHCP Server to cater for application demands in different scenarios.
- ◆ Supports configuring protection against DoS attack, filtering of MAC addresses, IP addresses and URL addresses, firewall and ACL rules to guarantee safe operation of the equipment.

5. Remote automatic provisioning of services, maintenance and management

- ◆ The equipment adopts the management based on TR-069 and OMCI, and supports TR-069 over OMCI. It can manage terminal services without IP network, which facilitates automatic provisioning, maintenance and management of services remotely.
- ◆ Supports configuring the global profile and delivering the XML configuration file on the network management system. Only a few changes are required to deliver the ONT services in a batch manner and make network adjustment.
- ◆ Supports configuring the user-defined upgrade policies on the network management system so that the equipment can be upgraded automatically after being powered on.
- ◆ Supports collecting performance data of the ONT remotely via the network management system to enable real-time monitoring of the network performance.
- ◆ Supports remote fault isolation for the ONT via the network management system. Faults can be isolated remotely according to the alarms reported to reduce the maintenance cost.

2.4.3 Functions and Features

Table 2-9 lists the functions and features of the HG6244C.

Table 2-9 Functions and Features of the HG6244C

Item		Description
GPON	GPON interface specifications	Compliant with standards ITU-T G.984.1, G.984.2, G.984.3 and G.984.4.
		Supports GEM encapsulation (Ethernet over GEM is supported, but ATM encapsulation is not supported).
		The GPON system adopts the single-fiber bidirectional transmission mechanism, using the TDMA mode with the wavelength 1310 nm in the uplink direction, and the broadcast mode with the wavelength 1490 nm in the downlink direction.
		Supports the embedded OAM message, PLOAM message and OMCI message.
		Supports the splicing of data packets and OMCI protocol packets in the uplink direction. Splicing with adaptive message length and that with fixed length are supported.
	GEM Port	Supports bearing the downlink broadcast packets and unknown multicast packets via the broadcast GEM port.

Table 2-9 Functions and Features of the HG6244C (Continued)

Item		Description
		Supports mapping from GEM ports to T-CONTs.
		Supports multiple flow mapping modes.
		Supports the GEM port loopback.
	T-CONT	Supports T-CONTs of Type 1 to Type 5.
		A T-CONT supports no less than 64 GEM ports.
		Supports eight T-CONTs.
	DBA	Supports DBA in the SR and NSR modes.
		Supports DBA Piggy-back DBRu Mode 0.
	FEC	Supports bi-directional FEC: downlink FEC decoding and uplink FEC encoding.
		Supports downlink FEC performance statistics.
	Encryption	Supports encryption of downlink unicast data channel.
		Supports the AES-128 encryption algorithm.
		Supports generation of the key and response to the OLT's request for key.
		Supports OMCI channel encryption.
	Registration authentication	Supports the ONT registration process as specified in ITU-T. G.984.3.
		Supports four authentication modes: SN, Password, SN + Password and LOID.
Supports performance statistics for the Ethernet interface.		
Supports performance statistics for the GEM interface.		
Ethernet	Complies with the IEEE 802.3 standard.	
	Supports configuring the Ethernet interface rate, working mode, and MDI/MDIX auto-negotiation mode.	
	Supports manual configuration to the rate 10/100/1000 Mbit/s.	
	Supports manual configuration of the half duplex or full duplex mode.	
	Supports unicast / downlink rate control based on the Ethernet interface, with the control granularity of 64 kbit/s.	
	Supports the PAUSE flow control.	
	Supports the loopback detection at the subscriber side.	
	Supports learning up to 1024 MAC addresses.	
	Supports global configuration of enabling / disabling the MAC address learning function.	
	Supports remote configuration of the MAC address aging time. The value ranges between 0s and 300s. The default value is 80s.	
Multicast	Supports the IGMP Snooping protocol.	
	Supports IGMP v1/v2/v3.	

Table 2-9 Functions and Features of the HG6244C (Continued)

Item	Description
	Supports filtering and forwarding of multicast MAC addresses.
	Supports controllable multicast and uncontrollable multicast.
	Supports fast leave.
	Supports translation, transparent transmission and stripping of the multicast VLAN tags.
	Supports VLAN translation for the uplink multicast protocol packets.
	Supports filtering the downlink multicast packets.
	Supports bearing downlink multicast service flow and IGMP signaling packets via different GEM ports.
	Supports configuration of the multicast GEM ports.
	Supports authentication of the GEM ports.
	Supports no less than 256 multicast groups.
	Uses the IPoE/PPPoE mode for the multicast services.
	Supports the IPv6 Snooping multicast service, supports the MLDv1 information, MLDv2 query information and MLDv2 report information.
	VLAN
Supports joining the 802.1Q VLAN in the tag / untag mode.	
Supports up to 4095 VLANs.	
Wire-speed forwarding	Supports Layer 2 / Layer 3 wire-speed forwarding.
Layer 3 features	Supports the IPv4/v6 dual stack.
	Supports obtaining network parameters such as the user IP address, subnet mask and DNS in the DHCP mode. Supports reporting the physical location of the Ethernet interface based on DHCP Option82.
	Supports obtaining user IP addresses in the PPPoE mode, and supports the PPPoE + function for precise identification of users.
	Supports static routing and default routing.
	Supports DDNS, NAT, port forwarding and DMZ.
	Supports ARP, UPnP, ALG, Portal and QoS.
Voice	Supports the protocols H.248 and SIP.
	Supports the speech encoding modes such as G.711, G.729, G.723.1 and G.722.
	Provides a phone number for each connected telephone set.
	Supports simultaneous call and conversation of two POTS subscribers.
	Supports static and dynamic jitter buffer.
	Supports DTMF detection.

Table 2-9 Functions and Features of the HG6244C (Continued)

Item	Description
	Supports RFC 2833 for transmitting / receiving DTMF.
	Supports RTP/RTCP (RFC 3550).
WLAN	Supports 802.11b, 802.11g, 802.11n, 802.11b/g and hybrid mode for the 2.4 GHz frequency band.
	Supports four SSIDs to differentiate networks.
	Supports 13 working channels in the 2.4GHz frequency band.
	Supports automatic selection and manual configuration of channels.
	Supports Open System, Shared key, WPA, WPA2, WPA-PSK, WPA2-PSK and WPS authentication.
	Supports the WEP, TKIP, AES and AES/TKIP encryption.
	Supports the WPS negotiation encryption algorithm and key.
	Supports adjustment of the transmit power, which is configured in form of percentage. Ten options are provided: 20%, 40%, 60%, 80%, 100%, 120%, 140%, 160%, 180% and 200%. Other values are not supported.
USB	Compliant with the USB 1.1/USB 2.0 standard.
	Supports plug-and-play and hot insertion of the USB storage device.
	Supports storage devices such as the USB HUB and mass storage.
	Supports providing the FTP service on the USB.
Security	Supports the firewall.
	Supports packet filtering.
	Supports filtering MAC addresses.
	Supports filtering URL addresses.
	Supports protection against illegal message (DoS, ARP) attacks; supports suppression of broadcast storms.
	Supports configuring the HTTPS safe channel.
	Supports configuring ACL rules for the ONT.
	Supports remote control.
Management and maintenance	Supports local service configuration, query and software upgrade based on the Web page.
	Supports management of the OMCI configuration and queries.
	Supports delivering the XML configuration file via the OMCI, alarm reporting, alarm synchronization and performance statistics.
	Supports automatic provisioning of services, equipment management and software upgrade remotely based on OMCI/TR-069.
	Supports query of the ONT optical module information.

Table 2-9 Functions and Features of the HG6244C (Continued)

Item	Description
	Supports TYPE B protection.
QoS	Provides abundant QoS functions; supports global configuration of queue priorities and flexible mapping of 802.1p values in packets.
	Supports the ACL function to match traffic based on the ACL rules.
	Supports three queue scheduling modes (PQ, WRR and PQ+WRR); supports configuring the weight of the queues under scheduling, so as to guarantee the quality of high-QoS services such as voice and video in the multi-service scenario.

2.4.4 Technical Specifications

See Table 2-10 for the technical specifications of the HG6244C.

Table 2-10 Technical Specifications of the HG6244C

Classification	Item	Description
Mechanical parameters	Dimensions	42mm × 211mm × 154mm (H × W × D)
	Wall mounting hole distance	142mm
	Weight	About 411g
Power supply parameter	DC	DC 12 V/1.5A
Power consumption parameters	Static power consumption	8.5W
	Maximum power consumption	11W
Environment parameters	Operating temperature	-5°C to 45°C
	Storage temperature	-40°C to 70°C
	Environmental humidity	10% to 90% (no condensation)

3 Web Configuration Guide

The following introduces the Web GUIs for the administrator users of the HG6244C, including the parameter meanings and operation methods.



Note:

Configure the ONT on the OLT using the access network management system. Please refer to the relevant OLT configuration guide.

- Logging into Web Configuration GUI Locally
- Status
- Network
- Security
- Application
- Management

3.1 Logging into Web Configuration GUI Locally

The following discusses how to log into the ONT Web GUI locally and introduces the configuration GUI layout.

Prerequisites

- ◆ The ONT has been connected with the computer correctly.
- ◆ The user computer is started normally.
- ◆ The ONT is started normally.

Press down the ONT power button. If the power indicator LED is ON, the ONT is powered on normally.

Planning Data

Before setting up the configuration environment, prepare the data as shown in Table 3-1.


Table 3-1 Planning Data for Logging into the Web GUI Locally

Item	Description
Username and password	Factory default value: <ul style="list-style-type: none"> ◆ Administrator <ul style="list-style-type: none"> ▶ Username: admin ▶ Password: admin ◆ Common user <ul style="list-style-type: none"> ▶ Username: user ▶ Password: user1234 <p>Note: Some operators have customized username and password, so that the default username and password may be different from the ones mentioned above. In this case, ask local operator for the administrator information. For common users, please refer to the <i>User Guide</i> attached to the device or the label at the bottom of the device.</p> <p>Note: The password is case sensitive.</p>
Management IP address and subnet mask of the ONT	Factory default value: <ul style="list-style-type: none"> ◆ IP address: 192.168.1.1 ◆ Subnet mask: 255.255.255.0 <p>Note: Some operators require customized management IP address, so that the default management IP address may be different from the one mentioned above. In this case, please refer to the <i>User Guide</i> attached to the device or the label at the bottom of the device.</p>
The IP address and the subnet mask of the user computer	<ul style="list-style-type: none"> ◆ Set this item to obtaining IP address automatically (recommended) based on DHCP. ◆ Set this item to static IP address, which should be in the same network segment with the management IP address of the ONT. <ul style="list-style-type: none"> ▶ IP address: 192.168.1.X (X is a decimal integer between 2 and 253) ▶ Subnet mask: 255.255.255.0


Operation Procedure

1. Set the IP address and the subnet mask of the computer.
 - ▶ The operations on the Windows 7 operating system are as follows:


- a) In the Windows taskbar, select **Start**→**Control Panel** and click **Network and Sharing Center**.
- b) Click **Local Area Connection** to bring up the **Local Area Connection Status** dialog box, and click **Properties**.

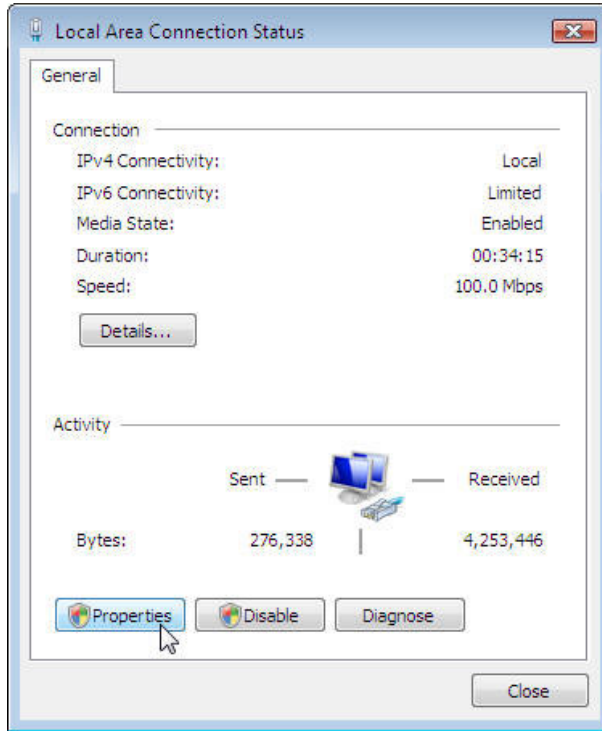

- c) In the **Local Area Connection Properties** dialog box that appears, double-click **Internet Protocol Version 4 (TCP/IPv4)**.

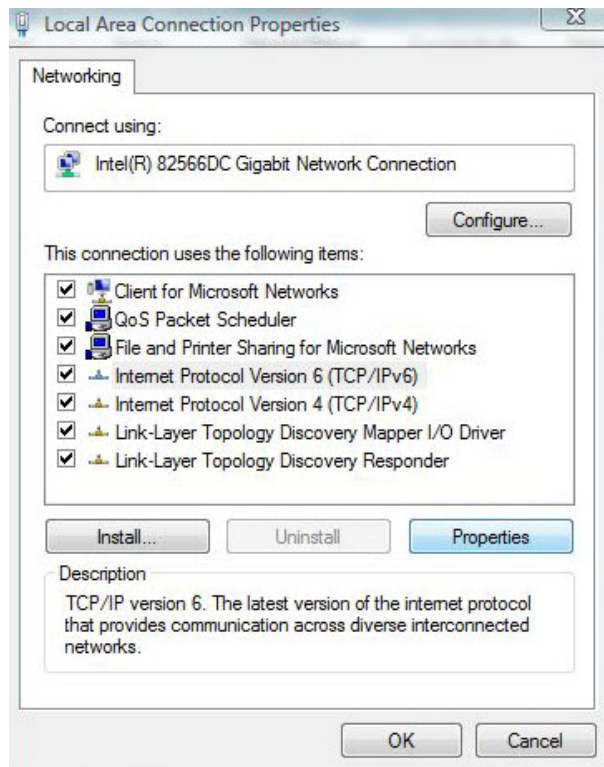


- d) In the **Internet Protocol Version 4 (TCP/IPv4) Properties** dialog box that appears, set the IP address and subnet mask of the computer. (See Table 3-1 for the detailed values).

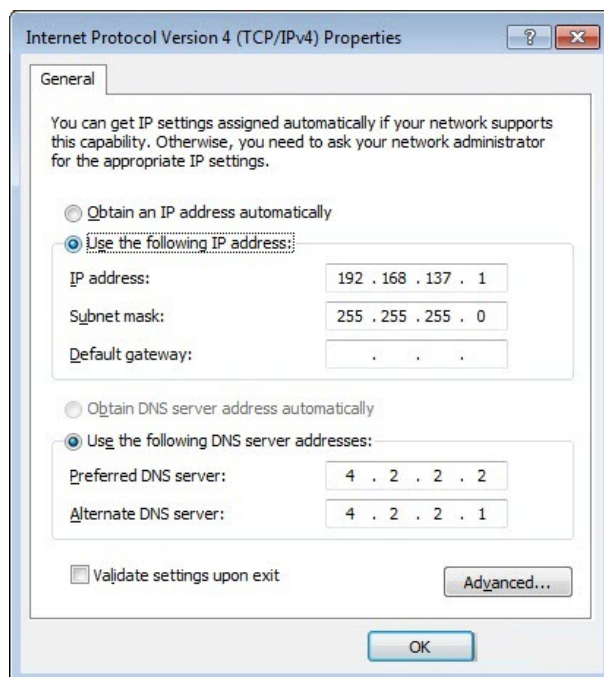

- e) Click the **OK** button to save the configuration.
- ▶ The operations on the Windows XP operating system are as follows:
 - a) In the Windows taskbar, select **Start** → **Control Panel**. Double-click **Network Connection** to enter the network connection window.
 - b) Right-click **Local Connection** and select **Properties** from the shortcut menu to bring up the **Local Connection Properties** dialog box.



- c) Double-click **Internet Protocol (TCP/IP)**. In the **Internet Protocol (TCP/IP) Properties** dialog box that appears, set the IP address and subnet mask of the computer. (See Table 3-1 for the detailed values).

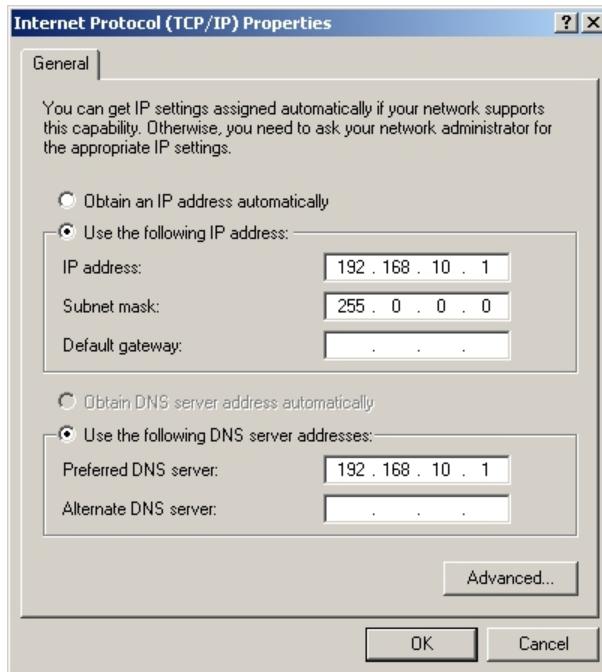

- d) Click the **OK** button to save the configuration.
2. Enter **http://192.168.1.1** (default management IP address of the ONT) in the browser address bar of the computer, and press the Enter key to bring up the user login dialog box.
 3. Enter the administrator username and password in the login dialog box. Access the Web GUI after the password is authenticated.



Caution:


The system will log out automatically if no operation is performed in five minutes.

Web Configuration GUI Layout

The Web configuration GUI comprises three parts, as shown in Figure 3-1.

- ◆ Navigation bar. Click the link to enter the corresponding configuration management page.
- ◆ Link bar. Click the link to enter the sub-page for corresponding configuration management.

- ◆ Configuration management area. Displays the contents of the selected navigation bar and link bar.

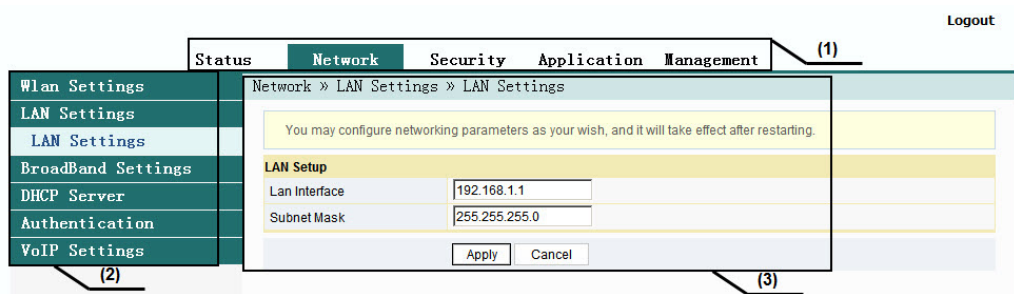

(1) Navigation bar (2) Link bar (3) Configuration management area

Figure 3-1 Web Configuration GUI



Note:

The screenshots provided here are for reference only, and the actual Web GUIs for the equipment shall prevail.

The configuration GUI for the administrator is different from that for common users:

- ◆ The administrator can view and configure all the node items in the Web GUI.
- ◆ The common users can view and configure only part of the node items. The following lists the key nodes available for common users. The configuration items actually available in the Web GUI for common users shall prevail.
 - ▶ The **Status** tab.
 - ▶ **User Account** and **Device Reboot** in the **Management** tab.

3.2 Status

The following introduces how to view basic information about the ONT, including the device information, WAN side status, LAN side status, optical power status and voice status, etc.

3.2.1 Device Information

Select **Status** in the navigation bar, and select **Device Information**→**Device Information** in the left link bar to view the information such as the software version, hardware version, device model and device description. See Figure 3-2.

Status » Device Information » Device Information

On this page, you can query device information.

Device Information	
Software Version	RP2600
Hardware Version	WKE2.094.289A01
Device Model	HG6244C
Device Description	GPON
Serial Number	FHTT91FBCE70
ONU State	O1(STATE_INIT)
ONU Regist State	INIT
LOID	fiberhome
CPU Usage	0.00%
Memory Usage	48.22%
Web Server port	80
CATV State	Disable
CATV Received Power	-40.00 dBm
CATV RF Power	0.00 dBmV

Figure 3-2 Device Information

3.2.2 Wireless Network Status

View the information about the wireless network, such as network mode, frequency channel, SSID, count of wireless packets, and list of Wi-Fi clients.

3.2.2.1 Wireless Network Status

Select **Status** in the navigation bar, and then select **Wireless Status**→**Wireless Status** in the left link bar to view the information of the wireless network, such as network mode, band, SSID and wireless packet statistics, as shown in Figure 3-3.

Status » Wireless Status » Wireless Status

On this page, you can query state of wireless.

Wireless State			
Radio On/Off	radio on		
Network Mode	802.11 b/g/n		
Frequency (Channel)	channel 9		
SSID1 Name	fat_111	34:bf:90:74:49:68	Enable
SSID2 Name	HOMEFIBR44968_ssid2	72:bf:90:74:49:69	Disable
SSID3 Name	HOMEFIBR44968_ssid3	72:bf:90:74:49:6a	Disable
SSID4 Name	HOMEFIBR44968_ssid4	72:bf:90:74:49:6b	Disable

Wireless Packets Count	
Received Packets Count	0
Received Bytes Count	0
Error Received Packets Count	0
Loss Received Packets Count	0
Sent Packets Count	0
Sent Bytes Count	0
Error Sent Packets Count	0
Loss Sent Packets Count	0

Figure 3-3 Wireless Network Status

3.2.2.2 Wi-Fi User List

Select **Status** in the navigation bar, and then select **Wireless Status**→**WIFI Clients List** in the left link bar to view the list of client ends connected to the ONT wireless network, as shown in Figure 3-4.

Status » Wireless Status » WIFI Clients List

You can get WIFI clients list here.

WIFI Clients List			
ID	SSID	MAC	IP

Figure 3-4 WIFI User List

3.2.3 WAN Side Status

Select **Status** in the navigation bar and select **Wan Status**→**Wan Status** in the left link bar to view the information such as the status, IP obtaining mode, IP address and subnet mask of the WAN interface. See Figure 3-5.

Status » Wan Status » Wan Status								
On this page, you can query the state of WAN interface.								
WAN State								
Index	State	Mode	IP Type	IP	Mask	DNS	VLAN/Priority	Connection Type
1	Down	INTERNET	DHCP				100/1	Route
More Information								
WAN Mac			02:10:18:01:00:03					
Connection Uptime			0 h 0 m 0 s					
Gateway								
IPv6 State								
IPv6 Address								
Prefix								
Default Gateway								
Primary DNS Server								
Secondary DNS Server								

Figure 3-5 WAN Side Status

3.2.4 LAN Side Status

Check the status information about the LAN interface and the DHCP client end.

3.2.4.1 LAN Side Status

Select **Status** in the navigation bar and select **Lan Status**→**Lan Status** in the left link bar to view the information such as the IP address, subnet mask of the LAN side. See Figure 3-6.

Status » Lan Status » Lan Status	
On this page, you can query the state of LAN interface.	
LAN State	
IP Address	192.168.1.1
LAN Mask	255.255.255.0

Figure 3-6 LAN Side Status

3.2.4.2 DHCP User List

Select **Status** in the navigation bar and select **Lan Status**→**DHCP Clients List** in the left link bar to view the information about the DHCP client end such as the IP address, MAC address and hired time. See Figure 3-7.

Status » Lan Status » DHCP Clients List				
Display information about DHCP client, include IP address, MAC address and lease.				
DHCP Clients List				
ID	MAC	IP	Leased Time	Type
--	--	--	--	--

Figure 3-7 DHCP User List

3.2.5 Optical Power Status

Select **Status** in the navigation bar and select **Optical Info**→**Optical Info** in the left link bar to view the optical module information such as the Tx optical power, Rx optical power and working temperature. See Figure 3-8.

Status » Optical Info » Optical Info	
On this page, you can query state of optical power.	
Optical Info	
Transmitted Power	2.49 dBm
Received Power	-12.50 dBm
Operating Temperature	34.69 °C
Supply Voltage	3.40 V
Bias Current	12.90 mA

Figure 3-8 Optical Power Status

3.2.6 Voice Status

Select **Status** in the navigation bar and select **VoIP Status**→**VoIP Status** in the left link bar to view the information such as the port state and the telephone number. See Figure 3-9.

Status » VoIP Status » VoIP Status		
On this page, you can query state of VoIP.		
Index	Port State	Telephone Number
1	INACTIVE	
2	INACTIVE	

Figure 3-9 Voice Status

3.3 Network

The following introduces how to configure the LAN, broadband, DHCP server, authentication and voice configuration in the Web GUI.

3.3.1 WLAN Settings

This section introduces how to configure Wi-Fi control and WPS as well as basic and advanced parameters of the wireless network on the Web page.

3.3.1.1 Basic Parameters

Configure the parameters of the 2.4G wireless network such as the switch, network mode, domain, frequency bandwidth and frequency channel.

1. Select **Network** in the navigation bar and select **Wlan Settings**→**Basic** in the left link bar to open the basic setting page for the 2.4G wireless access service, as shown in Figure 3-10.

Wireless Network	
Radio On/Off	<input type="button" value="RADIO ON"/>
Network Mode	802.11 b/g/n
Domain	ETSI
Frequency Bandwidth	40MHz
Frequency (Channel)	AutoSelect
Guard Interval	Short
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>	

Figure 3-10 Basic Parameters of the Wireless Network

2. Configure the basic parameters of the 2.4G wireless network. For details of the parameters, see Table 3-2.
3. Click **Apply** to save and apply the configuration.

Table 3-2 Basic Parameters of the 2.4G Wireless Network

Item	Description
Radio ON/OFF	Enables or disables the WLAN service. RADIO ON: the wireless network is enabled; RADIO OFF: the wireless network is disabled.
Network Mode	The mode supported by the wireless network. The options include 802.11b, 802.11g, 802.11b/g, 802.11n and 802.11b/g/n. The default setting is 802.11b/g/n.
Domain	Select your region.
Frequency Bandwidth	The width of wireless band. The options include 20MHz/40MHz, 20MHz and 40MHz.
Frequency (Channel)	The channel used for communication between the wireless access point and the wireless station. The options includes AutoSelect and Channel1 to Channel13 . The default setting is AutoSelect .
Guard Interval	The wireless protection interval. The options include Short and Long . The default setting is Short .

3.3.1.2 Advanced Configuration

Configure the parameters of the 2.4G wireless network, such as the SSID, password, security mode and algorithm.

1. Select **Network** in the navigation bar, and then select **Wlan Settings** → **Advanced** in the left link bar to open the advanced setting page for the 2.4G wireless access service, as shown in Figure 3-11.

Figure 3-11 Advanced Settings of the Wireless Network

2. Configure the parameters of the 2.4G wireless network, such as the SSID, password, security mode and algorithm. For details of the parameters, see Table 3-3.
3. Click **Apply** to save and apply the configuration.

Table 3-3 Advanced Setting Parameters of Wireless Network

Item	Description	
SSID Choice	Select the SSID. The value range is 1 to 4.	
Enable / Disable	Enables or disables the corresponding SSID.	
SSID Name	The wireless network name, used to identify different wireless networks.	
Hidden	Select whether to hide the SSID. When the SSID is hidden, the wireless terminal cannot detect the wireless signals unless the SSID is entered.	
Security Mode	<p>The authentication mode for the wireless terminal requiring access to the wireless network. The options include OPEN, SHARED, WEPAUTO, WPA-PSK, WPA2-PSK and WPAPSKWPA2PSK.</p> <ul style="list-style-type: none"> ◆ OPEN: Unencrypted. Any terminal can access the wireless network; therefore, the security cannot be guaranteed. This mode is not advisable. ◆ SHARED: This mode is based on the WEP encryption protocol, where the same key is configured for the wireless access client end and equipment side to provide the same security level as the wired LAN. It is a traditional WLAN security protocol. ◆ WEPAUTO: Both OPEN WEP and SHARED WEP are supported. ◆ WPA-PSK: This mode is based on the WLAN security protocol, where a key is pre-configured for the wireless access client end. The equipment side authenticates the legality of the wireless access client end key by the 4-way handshake key agreement protocol. This provides a safer and more confidential wireless network service than WEP. ◆ WPA2-PSK: WPA2 is the second edition of WPA. ◆ WPAPSKWPA2PSK: the authentication mode combining WPA and WPA2. 	
WPA Algorithms	The encryption algorithms include TKIP, AES and TKIPAES.	This item should be configured if the authentication mode is WPA-PSK, WPA2-PSK or WPAPSKWPA2PSK.
Pass Phrase	Enter the SSID key.	
Encrypt Type	Select to enable or disable the WEP encryption when the network authentication mode is OPEN.	

Table 3-3 Advanced Setting Parameters of Wireless Network (Continued)

Item	Description	
Default Key	Select Key1 to Key4; that is, select one of the four configured network keys.	This item should be configured when the authentication mode is OPEN and the WEP encryption is enabled or the authentication mode is SHARED or WEPAUTO.
WEP Key 1 to WEP Key 4	Enter the key value and select the key value type. At least enter the item selected in Default Key . <ul style="list-style-type: none"> ◆ If ASCII is selected, you should enter a key value containing 5 to 13 characters. ◆ If Hex is selected, you should enter a hexadecimal figure containing 10 to 26 characters. 	

**Note:**

Pressing the **Apply** button will validate a single **SSID choice** configuration item. If you do not click **Apply** after modifying the SSID 1 setting, the modification will not take effect.

If the SSID1 setting is modified, the factory default wireless network account will be invalid.

If you forget the customized wireless network account, restore the factory default account by pressing down the Reset button for more than 5 seconds.

3.3.1.3 Wi-Fi Control

Configure parameters of the 2.4G wireless network, such as Wi-Fi power and number of WIFI connections.

1. Select **Network** in the navigation bar, and then select **Wlan Settings**→**WIFI Control** in the left link bar to open the WIFI control setting page for the 2.4G wireless access service, as shown in Figure 3-12.

Figure 3-12 WIFI Control

2. Configure parameters of the 2.4G wireless network, such as WIFI power and number of WIFI connections. For details of the parameters, see Table 3-4.
3. Click **Apply** to save and apply the configuration.

Table 3-4 Parameters of WIFI Control

Item	Description
WIFI Power Control	The transmit power of the wireless signal. A larger value indicates a wider signal coverage.
Number of WIFI Connections	The maximum number of client ends supported by the SSIDs.

3.3.1.4 WPS Configuration

WPS can automatically set the wireless network name (SSID) and wireless encryption key for the HG6244C and client end supporting the Wi-Fi service. You need only to press down the WPS button or enter the PIN to achieve safe connection. Since you need not remember the long encryption key, you are free of the trouble caused by forgetting the password.

1. Select **Network** in the navigation bar and select **Wlan Settings**→**WPS** in the left link bar to open the WPS settings page, as shown in Figure 3-13.

Figure 3-13 WPS Configuration

Network » Wlan Settings » WPS

On this page, you could configure WPS.

WPS Enable

WPS Enable Enable Disable *

Apply Cancel

WPS Configuration

WPS State Connection Fail

Please input PIN code.

PIN Code

Please turn on the button of the equipment.

Connect Cancel

2. Select whether to enable the WPS function. The options include **Enable** and **Disable**.
3. Select the WPS connection mode as required.
 - ▶ Select **Please input PIN code.**, and enter the PIN code of the client end in the **PIN** text box. Then click **Connect**.
 - ▶ Select **Please turn on the button of the equipment** and press down the **WPS** button on the ONT. Then press down the WPS button or the WPS software key on the client end.
4. Wait until the connection is completed.

3.3.2 LAN Settings

Configure the management IP address and subnet mask at the LAN side.

1. Select **Network** in the navigation bar and select **LAN Settings** → **LAN Settings** in the left link bar to open the LAN settings page, as shown in Figure 3-14.

Network » LAN Settings » LAN Settings

You may configure networking parameters as your wish, and it will take effect after restarting.

LAN Setup

Gateway IP Address	192.168.1.1
Subnet Mask	255.255.255.0

IPv6 Config

IPv6/Prefix	fe80::1/64	(For example, fe80::1/64)
Managed Flag	<input type="checkbox"/>	
Other Config Flag	<input type="checkbox"/>	
Max RA Interval	10	Seconds (4-1800)
Min RA Interval	5	Seconds (3-1350)
DNS Source	Network Connection	
Prefix Mode	Network Connection	
Enable DHCP6S	<input type="checkbox"/>	
Start IPv6 Address	0:0:0:2	
End IPv6 Address	0:0:0:255	

Apply Cancel

Figure 3-14 LAN Settings

- Configure the management IP address and subnet mask at the LAN side. See Table 3-5 for the parameter description.
- Click **Apply** to save and apply the configuration.

Table 3-5 Parameters of LAN Settings

Item	Description
Gateway IP address	The management IP address at the LAN side of the ONT. The default value is 192.168.1.1.
Subnet Mask	The subnet mask of the ONT for the LAN. The default value is 255.255.255.0.
IPv6/Prefix	The IPv6 gateway address, including a prefix of 64 bits. The default value is fe80::1/64.
Managed Flag	Select whether to distribute the IPv6 address based on DHCP. The default value is Disable.
Other Config Flag	Select whether to distribute the IPv6 DNS information based on DHCP. The default value is Enable.
Max RA interval	The maximum interval for announcing the gateway information. The default value is 10.
Min RA interval	The minimum interval for announcing the gateway information. The default value is 5.

Table 3-5 Parameters of LAN Settings (Continued)

Item	Description
DNS source	The source of the DNS distributed to PC, including WAN connection, ONT proxy and static configuration. The default value is WAN connection.
Prefix mode	The source of the prefix information distributed to PC, including WAN connection and static configuration. The default value is WAN connection.
Enable DHCP6S	Sets whether to enable the DHCPv6 server. This item should be selected if Managed Flag or Other Config Flag is selected; otherwise the IP address or DNS information cannot be distributed. Enabled by default.
Start IPv6 Address	The starting address ID of the address pool for distribution of DHCPv6 IP addresses. The default value is 0:0:0:2.
End IPv6 Address	The ending address ID of the address pool for distribution of DHCPv6 IP addresses. The default value is 0:0:0:255.

3.3.3 Broadband Settings

Select different WAN connections for different network environment, or configure corresponding parameters for the selected WAN connection.

1. Select **Network** in the navigation bar and select **BroadBand Settings** → **Internet Settings** in the left link bar to open the Internet settings page, as shown in Figure 3-15.

Network » BroadBand Settings » Internet Settings

You may choose different connection type suitable for your environment. Besides, you may also configure parameters according to the selected connection type.

WAN List			
WAN Name	VID/Priority	WAN IP Mode	
INTERNET_R_VID_100	100/1	DHCP	<input type="checkbox"/>

Service Type	INTERNET
Connection Type	Route
VLAN ID	100 * (1-4094)
Priority	1 * (0-7)
NAT	Enable
DNS Relay	Enable
MTU	1500 * (1280-1500)
LAN Binding	LAN 1 <input checked="" type="checkbox"/> LAN 2 <input checked="" type="checkbox"/> LAN 3 <input type="checkbox"/> LAN 4 <input type="checkbox"/>
2.4G SSID Binding	SSID 1 <input checked="" type="checkbox"/> SSID 2 <input type="checkbox"/> SSID 3 <input type="checkbox"/> SSID 4 <input type="checkbox"/>
5G SSID Binding	SSID 1 <input type="checkbox"/> SSID 2 <input type="checkbox"/> SSID 3 <input type="checkbox"/> SSID 4 <input type="checkbox"/>
IP Mode	IPv4
WAN IP Mode	DHCP
DHCP Mode	
IP Address	<input type="text"/>
Subnet Mask	<input type="text"/>
Default Gateway	<input type="text"/>
Primary DNS Server	<input type="text"/>
Secondary DNS Server	<input type="text"/>

Apply Cancel

Figure 3-15 Internet Settings

- Configure parameters relevant to the Internet at the WAN side. Table 3-6 introduces the parameters.
- Click **Apply** to save and apply the configuration.

Table 3-6 Parameters for Internet Settings

Item	Description	
Service Type	<p>Select the WAN port service type.</p> <ul style="list-style-type: none"> ◆ TR069: this connection is only applicable for TR069. ◆ INTERNET: this connection is only applicable for Internet access. ◆ TR069_INTERNET: this connection is applicable for both TR069 and Internet access. ◆ VOIP: this connection is only applicable for voice application. ◆ VOIP_INTERNET: this connection is applicable for voice and Internet access. ◆ OTHER: other connections. 	
Connection Type	<p>Select the connection type of the WAN port.</p> <ul style="list-style-type: none"> ◆ Bridge: the Layer 2 bridge connection mode. This connection mode can be used when the service type is set to INTERNET, IPTV or OTHER. ◆ Route: the Layer 3 router connection mode. This connection mode can be used when the service type is set to INTERNET, IPTV or OTHER. 	
VLAN ID	<p>Sets the VLAN ID of the WAN connection. The value ranges from 1 to 4094. The VLAN ID value here should be consistent with that on the user side of the OLT.</p>	
Priority	<p>Sets the priority of the VLAN. The value ranges from 0 to 7.</p>	
NAT	Enables or disables the NAT function.	<ul style="list-style-type: none"> ◆ Users need to configure this item when the service type is set to TR069_INTERNET or VOIP_INTERNET. ◆ Users need to configure this item when the service type is set to INTERNET or OTHER and the connection type is set to Route.
DNS Relay	Enables or disables the DNS relay function.	
MTU	<p>Enter the maximum transmission unit. It is advised to use the default value.</p>	
LAN Binding	<p>Select the LAN port to be bound with the WAN port.</p>	
2.4G SSID Binding	<p>Select the wireless 2.4G SSID to be bound with the WAN port.</p>	
IP Mode	<p>The options include IPv4&IPv6, IPv4 and IPv6.</p>	<ul style="list-style-type: none"> ◆ Users need to configure this item when the service type is set to TR069_INTERNET or VOIP_INTERNET. ◆ Users need to configure this item when the service type is set to INTERNET or OTHER and the connection type is set to Route.

Table 3-6 Parameters for Internet Settings (Continued)

Item	Description	
WAN IP Mode	<p>Sets the IP address obtaining mode at the WAN side of the ONT. The options include DHCP, static and PPPoE.</p> <ul style="list-style-type: none"> ◆ DHCP: Obtaining the IP address dynamically. ◆ Static: Setting the IP address in a static mode. ◆ PPPoE: PPPoE dialing mode. 	This item should be set if the connection type is Route.
User Name	Enter the username provided by ISP.	This item should be set if the WAN IP Mode is set to PPPoE.
Password	Enter the password provided by ISP.	
Operation Mode	Sets the PPPoE connection mode. The default setting is "Keep Alive".	
IP Address	Enter the static IP address at the WAN side provided by ISP.	This item should be set when the IP Mode is set to IPv4&IPv6 or IPv4 and the WAN IP Mode is set to static .
Subnet Mask	Enter the subnet mask provided by ISP.	
Default Gateway	Enter the default gateway provided by ISP.	
Primary DNS Server	Enter the IP address of the active DNS server provided by ISP.	
Secondary DNS Server	Enter the IP address of the standby DNS server provided by ISP.	
IPv6 Address	Enter the static IPv6 address at the WAN side provided by ISP.	This item should be set when the IP Mode is set to IPv4&IPv6 or IPv6 and the WAN IP Mode is set to static .
IPv6 Prefix Length	Enter the static IPv6 address prefix length at the WAN side provided by ISP.	
Default Gateway	Enter the default gateway provided by ISP.	
Primary DNS Server	Enter the IP address of the active DNS server provided by ISP.	
Secondary DNS Server	Enter the IP address of the standby DNS server provided by ISP.	
IPv6 Address Mode / IPv6 Prefix Mode	Select the IPv6 address obtaining mode / prefix obtaining mode.	This item should be set when the IP Mode is set to IPv4&IPv6 or IPv6 and the WAN IP Mode is set to DHCP or PPPoE .

3.3.4 DHCP Server

Using the DHCP function, the ONT can distribute the network parameters (such as IP address, gateway and DNS server IP address) to the devices (such as computer) within the LAN. Users can manage the IP addresses collectively using this function.

1. Select **Network** in the navigation bar, and then select **DHCP Server**→**DHCP Service** from the left link bar to open the DHCP server configuration page, as shown in Figure 3-16.

Figure 3-16 DHCP Service

2. Configure the DHCP server parameters as required. Table 3-7 describes the parameters.
3. Click **Apply** to save the configuration information. The configuration will take effect after the ONT is rebooted.

Table 3-7 Parameters for the DHCP Server

Item	Description	
Type	Enables or disables the DHCP server. <ul style="list-style-type: none"> ◆ Server: Enables the DHCP server. The ONT can dynamically distribute IP addresses to user terminals. ◆ Disable: The user terminals connected to the ONT cannot obtain the private network IP address using the DHCP. 	
DHCP Start IP	The starting IP address of the IP address pool for the active DHCP server.	Note: The IP address set here should be in the same network segment with the IP address set in LAN Settings; otherwise, the DHCP server will not operate normally.
DHCP End IP	The ending IP address of the IP address pool for the DHCP server.	
DHCP Subnet Mask	The mask of the active DHCP server.	
DHCP Primary DNS	The IP address of the active DNS server.	

Table 3-7 Parameters for the DHCP Server (Continued)

Item	Description	
DHCP Secondary DNS	The IP address of the standby DNS server.	
DHCP Default Gateway	The default gateway of the active DHCP server.	
DHCP Lease Time	The lease time of the IP address pool of the DHCP server.	
Option60	Enables or disables the Option 60 property to identify the user terminal.	
Option 60 start IP	The starting IP address of the network segment distributed to the Option 60 property terminal by the DHCP server.	This item should be configured when the Option 60 field of the DHCP server is enabled.
Option 60 end IP	The ending IP address of the network segment distributed to the Option 60 property terminal by the DHCP server.	

3.3.5 Authentication Setting

Configure the parameters relevant to the ONT authentication mode, so that the ONT can pass the OLT authentication.

1. Select **Network** in the navigation bar and select **Authentication**→**OLT Authentication** in the left link bar to open the OLT authentication configuration page, as shown in Figure 3-17.

Network » Authentication » OLT Authentication

On this page, you may modify the ONU authentication-related parameters to authenticate the OLT. It will take effect after restarting.

LOID Auth

LOID *(You can input 1-24 basic Latin characters)

Logic Password (You can input 0-12 basic Latin characters)

Password Auth

Pass Key *(You can input 0-10 characters, including alphanumeric, '^' and '_')

Figure 3-17 OLT Authentication

2. Configure the parameters as required. Table 3-8 describes the parameters.

3. Click **Apply** to save the configuration information. The configuration will take effect after the ONT is rebooted.

Table 3-8 Parameters for OLT Authentication

Item	Description	
LOID	Sets the LOID user name.	This item is configurable when the ONT uses the LOID authentication mode.
Logic Password	Sets the LOID password.	
Password Auth	Sets the authentication password when the ONT is authenticated by password.	

3.3.6 Voice Configuration

This section introduces how to configure the key parameters, basic parameters, advanced settings, digitmap and time length, and coding mode for voice services in the Web page.

3.3.6.1 Key Parameters

Configure the parameters such as VoIP protocol type and VoIP port.

1. Select **Network** in the navigation bar and select **VoIP Settings**→**Key Parameters** from the link bar on the left side to open the VoIP key parameter page, as shown in Figure 3-18.

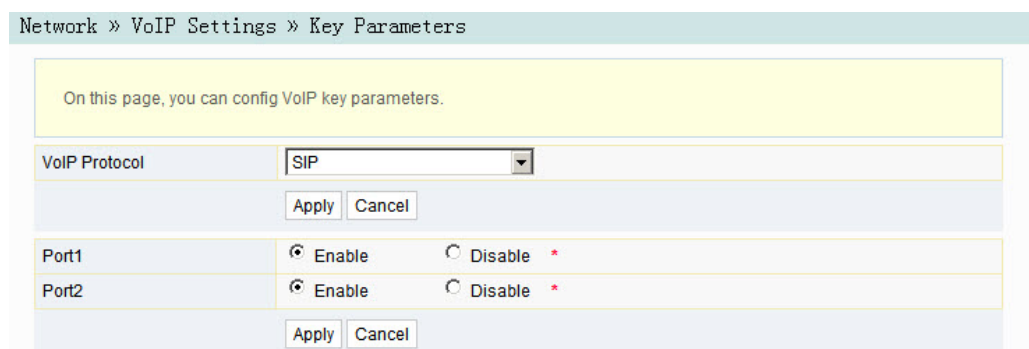


Figure 3-18 Key Parameters for Voice Configuration

2. Configure the key VoIP parameters as required. Table 3-9 describes the parameters.
3. Click **Apply** to save and apply the configuration.

Table 3-9 Key Parameters for Voice Service

Item	Description
VoIP Protocol	The voice protocol type. The options include SIP and H.248. The default setting is SIP.
Port	Enable or disable the VoIP port.

3.3.6.2 Basic Parameters

Configure basic VoIP parameters.

1. Select **Network** in the navigation bar and select **VoIP Settings** → **Basic** from the link bar on the left side to open the VoIP basic parameter configuration page, as shown in Figure 3-19.

Network » VoIP Settings » Basic

On this page, you can config VoIP parameters.

VoIP Basic Parameters

VoIP Protocol	SIP		
VoIP Username(port1)	<input type="text"/>	*(Username length should be 1-64.)	
VoIP Password(port1)	<input type="text"/>	*(Password length should be 1-64.)	
Telephone Number(port1)	<input type="text"/>	*	
VoIP Username(port2)	<input type="text"/>	(Username length should be 1-64.)	
VoIP Password(port2)	<input type="text"/>	(Password length should be 1-64.)	
Telephone Number(port2)	<input type="text"/>		
First Register Server	<input type="text"/>	*(IP or Domain)	Port <input type="text" value="5060"/> *(1024-65535)
Second Register Server	<input type="text"/>	(IP or Domain)	Port <input type="text" value="5060"/> (1024-65535)
First Proxy Server	<input type="text"/>	*(IP or Domain)	Port <input type="text" value="5060"/> *(1024-65535)
Second Proxy Server	<input type="text"/>	(IP or Domain)	Port <input type="text" value="5060"/> (1024-65535)
First DNS Address	<input type="text"/>		
Second DNS Address	<input type="text"/>		
CVLAN ID	<input type="text"/>	*(1-4095)	
CVLAN Priority	<input type="text" value="0"/>	*(0-7)	
SVLAN ID	<input type="text"/>	(1-4095)	
SVLAN Priority	<input type="text" value="0"/>	(0-7)	
IP Mode	STATIC <input type="text"/>		
STATIC Mode			
IP	<input type="text" value="0.0.0.0"/>		
Netmask	<input type="text" value="0.0.0.0"/>		
Gateway	<input type="text" value="0.0.0.0"/>		
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>			

Figure 3-19 Basic Parameters for Voice Configuration

2. Configure the basic VoIP parameters as required. Table 3-10 describes the parameters.
3. Click **Apply** to save and apply the configuration.

Table 3-10 Basic Parameters for Voice Service

Item	Description
VoIP Protocol	The VoIP protocol type, configured in Key Parameters .
VoIP Username	VoIP username.
VoIP Password	VoIP password.
Telephone Number	Telephone number for the voice port.
First Register Server	The IP address or the domain name of the active register server. The value ranges from 1024 to 65535. The default value is 5060.
Second Register Server	The IP address or the domain name of the standby register server. The value ranges from 1024 to 65535. The default value is 5060.
First Proxy Server	The IP address or the domain name of the active proxy server. The value ranges from 1024 to 65535. The default value is 5060.
Second Proxy Server	The IP address or the domain name of the standby proxy server. The value ranges from 1024 to 65535. The default value is 5060.
First DNS Address	The active DNS address.
Second DNS Address	The standby DNS address.
CVLAN ID	The CVLAN ID. The value ranges from 1 to 4095.
CVLAN Priority	The CVLAN priority. The value ranges from 0 to 7. The default setting is 0.
SVLAN ID	The SVLAN ID. The value ranges from 1 to 4095.
SVLAN Priority	The SVLAN priority. The value ranges from 0 to 7. The default setting is 0.
IP Mode	The way to obtain IP address. The options include STATIC, DHCP and PPPoE.
IP	The IP address.
Netmask	The subnet mask.
Gateway	The gateway.
PPPoE Username	The PPPoE username.
PPPoE Password	The PPPoE password.

This item should be configured if the IP Mode is set to STATIC.

This item should be configured if the IP Mode is set to PPPoE.

3.3.6.3 Advanced Configuration

Configure advanced VoIP parameters.

1. Select **Network** in the navigation bar and select **VoIP Settings** → **Advanced** in the left link bar to open the advanced VoIP setting page, as shown in Figure 3-20.

Network » VoIP Settings » Advanced

On this page, you can config VoIP advance parameters.

VoIP Advance Param

RFC2833 PT Value	<input type="text" value="97"/>	*(0,96~127)
RFC2198 PT Value	<input type="text" value="0"/>	*(0,96~127)
Alive Times	<input type="text" value="6"/>	*(1~120)
Alive Interval	<input type="text" value="30"/>	*(1~43200)
Fax Mode	Transparent	
ReversedPolarity	Enable	
Character Escape Mode	Escape	
DTMF Mode	Transparent	
Caller-ID Head Field	P-Asserted-id	
Keepalive Mode	Active	
Local Port	<input type="text" value="5060"/>	(1024~65535)
EchoCancel	Enable	
Silence Suppression	Disable	
Call-waiting	Disable	
Call Conference	Disable	
CallerIDMode	FSK	
Output Gain	<input type="text" value="0"/>	*(-12~6)
Input Gain	<input type="text" value="0"/>	*(-12~6)
EchoCancel(port 2)	Enable	
Silence Suppression(port 2)	Disable	
Call-waiting(port 2)	Disable	
Call Conference(port 2)	Disable	
CallerIDMode(port 2)	FSK	
Output Gain(port 2)	<input type="text" value="0"/>	*(-12~6)
Input Gain(port 2)	<input type="text" value="0"/>	*(-12~6)

Apply Cancel

Figure 3-20 Advanced Parameters for Voice Configuration

2. Configure the advanced VoIP parameters as required. Table 3-11 describes the parameters.
3. Click **Apply** to save and apply the configuration.

Table 3-11 Advanced Parameters for Voice Service

Item	Description
RFC2833 PT Value	Default PT value in RFC2833. The values include 0 and 96 to 127.
RFC2198 PT Value	Default PT value in RFC2198. The values include 0 and 96 to 127.
Alive Times	Heartbeat timeout times. The value ranges from 1 to 120.
Alive Interval	Heartbeat time length. The value ranges from 1 to 43200.
Fax Mode	The fax mode. The options include "Transparent" and "T38". The default setting is "Transparent".
Reversed Polarity	Enable or disable the reversed polarity signal. The default setting is "Enable".
Character Escape Mode	The options include "Escape" and "Not Escape". The default setting is "Escape".
DTMF Mode	The DTMF mode. The options include "Transparent" and "RFC2833". The default setting is "Transparent".
Caller-ID Head Field	The Caller ID display mode. The options include "From domain" and "P-asserted Id". The default setting is "P-asserted Id".
Keepalive Mode	Enable or Disable the heartbeat mode. The default setting is "Active".
Local Port	The number of the local port. Value range: 1024 to 65535. The default setting is 5060.
Echo Cancel	Enable or disable the echo suppression. The default setting is "Enable".
Silence Suppression	Enable or disable the silence suppression. The default setting is Disable.
Call-waiting	Enable or disable the call-waiting function. The default setting is Disable.
Call Conference	Enable or disable the call conference. The default setting is Disable.
Caller ID Mode	The options include "FSK" and "Disable". The default setting is "FSK".
Output Gain	Output gain. The value ranges from -12 to 6.
Input Gain	Input gain. The value ranges from -12 to 6.

3.3.6.4 Digitmap and Length

Configure the VoIP time length and digitmap parameters including digitmap matching mode, SIP registration cycle, short timer, long timer, starting timer and long call timer, etc.

1. Select **Network** in the navigation bar and select **VoIP Settings** → **Dial and Timeout** from the link bar on the left side to open the dial and timeout configuration page, as shown in Figure 3-21.

Network » VoIP Settings » Dial and Timeout

On this page, you can config VoIP timer and logplot.

VoIP Timer Param

Logplot Mode	Min	
Logplot	[0-9ABCD].[*#][0-9ABCD*#].	
Regist Period	3600	120~65535(s)
Short Digit Timer	4	1~254(s)
Long Digit Timer	10	1~254(s)
Start Digit Timer	60	1~254(s)
Long Call Time	60	1~254(s)
Hang Up Time	60	1~254(s)
Busy Time	40	1~254(s)
Retransmission Interval	30	1~3600(s)
Avalanche Timer	30	1~254(s)
Sliding Spring Time	90 -- 600	90~2500(ms), multiple of 10

Apply Cancel

Figure 3-21 Digitmap and Length

2. Configure VoIP time length parameters. Table 3-12 describes the parameters.
3. Click **Apply** to save and apply the configuration.

Table 3-12 Parameters of Digitmap and Length

Item	Description
Logplot Mode	Digitmap matching mode. The options include Max and Min. The default setting is Min.
Regist Period	The SIP registration period. The value ranges from 120 to 65535 (s). The default setting is 3600.
Short Digit Timer	The short timer. The value ranges from 1 to 254 (s). The default setting is 4.
Long Digit Timer	The long timer. The value ranges from 1 to 254 (s). The default setting is 10.
Start Digit Timer	The starting timer. The value ranges from 1 to 254 (s). The default setting is 60.
Long Call Time	The timer for long call without response. The value ranges from 1 to 254 (s). The default setting is 60.

Table 3-12 Parameters of Digitmap and Length (Continued)

Item	Description
Hang Up Time	The howler tone timer. The value ranges from 1 to 254 (s). The default setting is 60.
Busy Time	The busy tone timer. The value ranges from 1 to 254 (s). The default setting is 40.
Retransmission Interval	The interval for retransmission of registration information. The value ranges from 1 to 3600 (s). The default setting is 30.
Avalanche Timer	The avalanche timer. The value ranges from 1 to 254 (s). The default setting is 30.
Sliding Spring Time	The sliding spring time. The value ranges from 90 to 2500 (ms) and should be multiples of 10. The default value ranges from 90 to 600.

3.3.6.5 Coding

Configure coding priority for voice ports. The parameters include priority, coding mode, RTP packetization period, and so on.

1. Select **Network** in the navigation bar and select **VoIP Settings** → **Coding** from the link bar on the left side to open the coding configuration page, as shown in Figure 3-22.

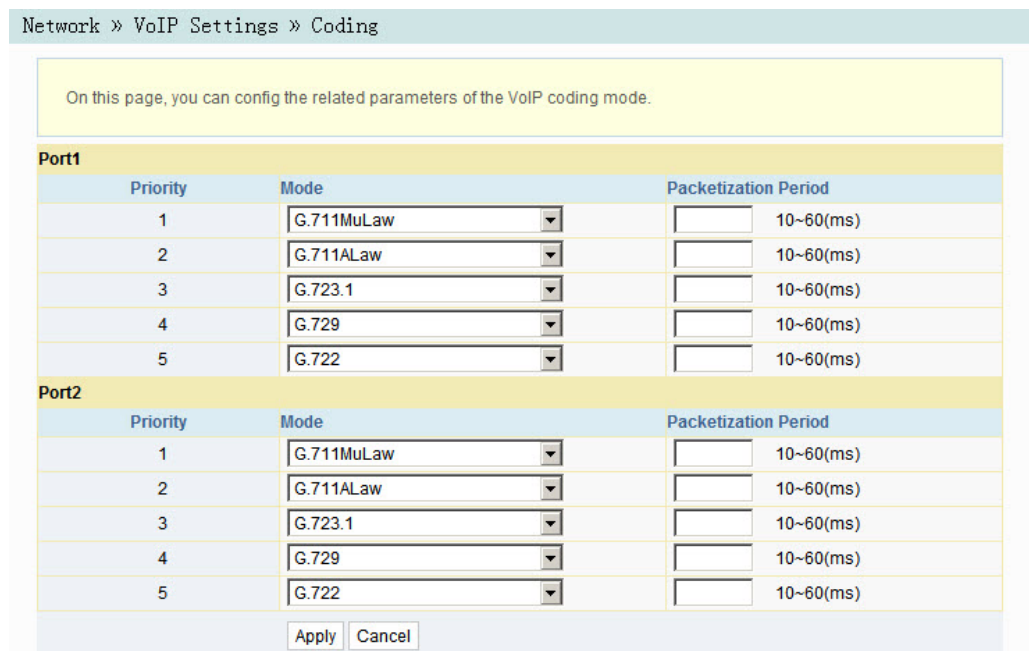


Figure 3-22 Coding

2. Configure parameters of voice ports, including priority, coding mode and RTP packetization period, as shown in Table 3-13.
3. Click **Apply** to save and apply the configuration.

Table 3-13 Coding Parameters

Item	Description
Mode	The coding mode. The options include G.711MuLaw, G.711ALaw, G.723.1, G.729 and G.722.
Packetization Period	The RTP packetization period. The value ranges from 10 to 60 (ms).

3.4 Security

The following introduces how to configure the firewall, remote control, dynamic DoS and HTTPS in the Web GUI.

3.4.1 Firewall

The firewall configuration includes

- ◆ Firewall Control
- ◆ IPv4 Filtering
- ◆ IPv6 Filtering
- ◆ URL Filtering
- ◆ DHCP Filtering
- ◆ Anti-port Scan
- ◆ MAC Filtering
- ◆ IPv6 MAC Filtering

3.4.1.1 Firewall Control

Enabling the firewall can prevent malicious access to the WAN port of the ONT.

1. Select **Security** in the navigation bar and select **Firewall**→**Firewall Control** in the left link bar to open the firewall enabling page, as shown in Figure 3-23.

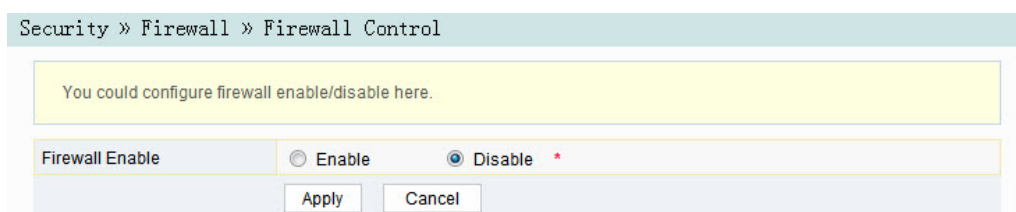


Figure 3-23 Firewall Enabling

2. Select to **Enable** or **Disable** the firewall as required.
3. Click **Apply** to save and apply the configuration.

3.4.1.2 IP Filtering

Allow or forbid the incoming or outgoing flow of the IP packets that comply with the filtering conditions. After the firewall is enabled, the pre-set rules will take effect.

1. Select **Security** in the navigation bar and select **Firewall**→**IPv4 Filtering** in the left link bar. Click **Add** to open the filtering rule list configuration page, as shown in Figure 3-24.

Security » Firewall » IPv4 Filtering

If the firewall is enabled, the rules take effect.

Filter Mode: White List Black List *

ID	Direction	Src IP	Src Port	Dst IP	Dst Port	Protocol
--						
--						

Direction:

Src IP: -

Src Port: -

Dst IP: -

Dst Port: -

Protocol:

Figure 3-24 IPv4 Filtering

- Configure the parameters relevant to filtering as required. Table 3-14 describes the parameters.
- Click **Apply** to save and apply the configuration.

Table 3-14 Parameters for IP Address Filtering

Item	Description
Filter Mode	<p>Select the filtering mode.</p> <ul style="list-style-type: none"> ◆ Whitelist indicates that the data complying with the rules in the filtering rule table will be allowed to pass. ◆ Blacklist indicates that the data complying with the rules in the filtering rule table will not be allowed to pass. <p>After the aforesaid operation, click the Apply button to validate the configuration.</p>
Direction	<p>Sets the direction of the filtering rule.</p> <ul style="list-style-type: none"> ◆ LAN->WAN: uplink direction. ◆ WAN->LAN: downlink direction.
Src IP	<p>Enter the IP address at the LAN side if the direction is LAN->WAN. Enter the IP address at the WAN side if the direction is WAN->LAN.</p>
Src Port	<p>The port range of the source IP address. This item is configurable when the Protocol is set to TCP or UDP.</p>
Dst IP	<p>Enter the IP address at the WAN side if the direction is LAN->WAN. Enter the IP address at the LAN side if the direction is WAN->LAN.</p>

Table 3-14 Parameters for IP Address Filtering (Continued)

Item	Description
Dst Port	The port range of the destination IP address. This item is configurable when the Protocol is set to TCP or UDP.
Protocol	Protocol type, including TCP, UDP, ICMP and ALL.

3.4.1.3 IPv6 Filtering

Allow or forbid the IPv6 packets that comply with the filtering condition to be transmitted from the LAN or transmitted into MAN. After the firewall is enabled, the pre-set rules will take effect.

1. Select **Security** in the navigation bar and select **Firewall**→**IPv6 Filtering** in the left link bar. Then click **Add** to open the IPv6 filtering rule list configuration page, as shown in Figure 3-25.

Security » Firewall » IPv6 Filtering

If the firewall is enabled, the rules take effect.

Uplink White List Black List *

Downlink White List Black List *

Apply Cancel

Add Delete Delete All

Filtering Rules List						
ID	Direction	Src IPv6	Src Port	Dst IPv6	Dst Port	Protocol
--						
--						

Direction Lan -> Wan

Src IPv6 -

Src Port -

Dst IPv6 -

Dst Port -

Protocol TCP

Apply Cancel

Figure 3-25 IPv6 Filtering

2. Configure the parameters relevant to filtering as required. Table 3-15 describes the parameters.

3. Click **Apply** to save and apply the configuration.

Table 3-15 Parameters of IPv6 Filtering

Item	Description
Uplink	<p>Select the uplink filtering mode.</p> <ul style="list-style-type: none"> ◆ Whitelist indicates that the data complying with the rules in the filtering rule table will be allowed to pass. ◆ Blacklist indicates that the data complying with the rules in the filtering rule table will not be allowed to pass.
Downlink	<p>Select the downlink filtering mode.</p> <ul style="list-style-type: none"> ◆ Whitelist indicates that the data complying with the rules in the filtering rule table will be allowed to pass. ◆ Blacklist indicates that the data complying with the rules in the filtering rule table will not be allowed to pass.
Direction	<p>Sets the direction of the filtering rule.</p> <ul style="list-style-type: none"> ◆ LAN->WAN: uplink direction. ◆ WAN->LAN: downlink direction.
Src IPv6	<p>Enter the IPv6 address at the LAN side if the direction is set to LAN->WAN. Enter the IPv6 address at the WAN side if the direction is set to WAN->LAN.</p>
Src Port	<p>The port range of the source IP address. This item is configurable when the Protocol is set to TCP or UDP.</p>
Dst IPv6	<p>Enter the IPv6 address at the WAN side if the direction is set to LAN->WAN. Enter the IPv6 address at the LAN side if the direction is set to WAN->LAN.</p>
Dst Port	<p>The port range of the destination IP address. This item is configurable when the Protocol is set to TCP or UDP.</p>
Protocol	<p>Protocol type, including TCP, UDP, ICMP and ALL.</p>

After the aforesaid operation, click the **Apply** button to validate the configuration.

3.4.1.4 URL Filtering

By setting the URL filtering rules, users can forbid or allow all the data packets sent to or received from a certain IP address. After the fire wall is enabled, the pre-set URL filtering rule will take effect, and the domain names that meet the filtering conditions will be filtered.

1. Select **Security** in the navigation bar and select **Firewall**→**URL Filtering** in the left link bar, and then click **Add** to open the URL filtering table configuration page, as shown in Figure 3-26.

Figure 3-26 URL Filtering

2. Configure the parameters relevant to filtering as required. Table 3-16 describes the parameters.
3. Click **Apply** to save and apply the configuration.

Table 3-16 Parameters for URL Filtering Parameters

Item	Description
Enable	Enables or disables the URL filtering function.
URL Blacklist / Whitelist	<p>Select the filtering mode. The white list and black list modes are configured globally, and cannot be enabled simultaneously.</p> <ul style="list-style-type: none"> ◆ Whitelist indicates that the data complying with the rules defined in the filtering rule table will be allowed to pass. ◆ Blacklist indicates that the data complying with the rules defined in the filtering rule table will not be allowed to pass.
URL Address	The URL address accessed by users.
Start Time	The starting time of the filtering rule.

After setting, click **Apply** below to take effect.

Table 3-16 Parameters for URL Filtering Parameters (Continued)

Item	Description
End Time	The ending time of the filtering rule.
Enable	Enables or disables this filtering rule. The options include Disable and Enable.

3.4.1.5 DHCP Filtering

Forbid or allow the user device configured with the MAC address to obtain an IP address in the DHCP mode to prevent DOS attacks. After the firewall is enabled, the pre-set rules will take effect.

1. Select **Security** in the navigation bar and select **Firewall**→**DHCP Filtering** in the left link bar. Then click **Add** to open the DHCP Filtering Table configuration page, as shown in Figure 3-27.

Security » Firewall » DHCP Filtering

If the firewall is enable, the configuration of the rules take effect, then Blocking the MAC address to get the DHCP.

DHCP Filtering Enable Enable Disable *

DHCP Filtering Blacklist/Whitelist White List Black List *

Apply Cancel

Add Delete Delete All

DHCP Filtering Table	
ID	MAC Address

MAC Address (You can input alphanumeric and ':', such as 00:24:21:19:BD:E4)

Apply Cancel

Figure 3-27 DHCP Filtering

2. Configure the parameters relevant to filtering as required. Table 3-17 describes the parameters.
3. Click **Apply** to save and apply the configuration.

Table 3-17 Parameters for DHCP Filtering

Item	Description	
DHCP Filtering Enable	Enables or disables the DHCP filtering.	
DHCP Filtering Blacklist / Whitelist	Select the filtering mode. The white list and black list modes are global configuration, which cannot be enabled simultaneously. <ul style="list-style-type: none"> ◆ Whitelist indicates allowing the device configured with the MAC address to obtain the IP address using the DHCP. ◆ Blacklist indicates forbidding the device configured with the MAC address to obtain the IP address using the DHCP. 	After setting, click Apply below to take effect.
MAC Address	The MAC address of the user device subject to the DHCP filtering rule.	

3.4.1.6 Anti-port Scan

Enable or disable the anti-port scan function.

1. Select **Security** in the navigation bar and select **Firewall** → **Anti Port Scan** in the left link bar to open the anti-port scan page, as shown in Figure 3-28.

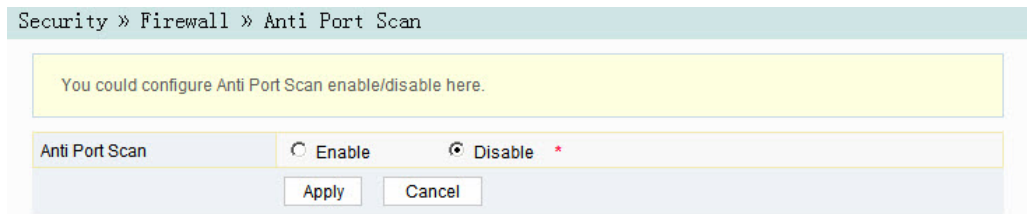


Figure 3-28 Anti-port Scan

2. Select to **Enable** or **Disable** the anti-port scan function as required.
3. Click **Apply** to save and apply the configuration.

3.4.1.7 MAC Address Filtering

One user device may have multiple IP addresses but only one MAC address. The user device access authority in the LAN can be controlled effectively by setting the MAC address filtering. After the fire wall is enabled, the pre-set rules will take effect, and the MAC addresses that meet the filtering conditions will be filtered.

1. Select **Security** in the navigation bar and select **Firewall**→**MAC Filtering** in the left link bar, and then click **Add** to open the MAC address filtering table configuration page, as shown in Figure 3-29.

Security » Firewall » MAC Filtering

If the firewall is enabled, the rules take effect, then the MAC Addresses matching the filter rules will be banned.

MAC Filtering Enable Enable Disable *

MAC Filtering Blacklist/Whitelist White List Black List *

Apply Cancel

Add Delete Delete All

ID	MAC Address	Time	Enable

MAC Address (You can input alphanumeric and ':', such as 00:24:21:19:BD:E4)

Start Time :

End Time :

Enable

Apply Cancel

Figure 3-29 MAC Filtering

2. Configure parameters relevant to filtering as required. Table 3-18 describes the parameters.
3. Click **Apply** to save and apply the configuration.

Table 3-18 Parameters for MAC Address Filtering

Item	Description
MAC Filtering Enable	Enables or disables the MAC address filtering function. After setting, click Apply below to take effect.

Table 3-18 Parameters for MAC Address Filtering (Continued)

Item	Description
MAC Filtering Blacklist / Whitelist	<p>Select the filtering mode. The white list and black list modes are global configuration, which cannot be enabled simultaneously.</p> <ul style="list-style-type: none"> ◆ Whitelist indicates that the data complying with the rules defined in the filtering rule table will be allowed to pass. ◆ Blacklist indicates that the data complying with the rules defined in the filtering rule table will not be allowed to pass.
MAC Address	The MAC address in the MAC address filtering rule.
Start Time	The starting time of the filtering rule.
End Time	The ending time of the filtering rule.
Enable	Enables or disables this filtering rule. The options include Disable and Enable.

3.4.1.8 IPv6 Mac Filtering

One user device may have multiple IPv6 addresses but only one MAC address. The user device access authority in the LAN can be controlled effectively by setting the MAC address filtering. After the fire wall is enabled, the pre-set rules will take effect, and the MAC addresses that meet the filtering conditions will be filtered.

1. Select **Security** in the navigation bar and select **Firewall**→**IPv6 MAC Filtering** in the left link bar, and then click **Add** to open the page for configuring the MAC address filtering table, as shown in Figure 3-30.

Security » Firewall » IPv6 MAC Filtering

If the firewall is enabled, the rules take effect, then the IPv6 MAC Addresses matching the filter rules will be banned.

IPv6 MAC Filtering Enable Enable Disable *

IPv6 MAC Filtering Blacklist/Whitelist White List Black List *

ID	MAC Address	Time	Enable

MAC Address (You can input alphanumeric and :, such as 00:24:21:19:BD:E4)

Start Time 0 : 0

End Time 24 : 0

Enable Disable ▾

Figure 3-30 IPv6 Mac Filtering

- Configure the parameters relevant to filtering as required. Table 3-19 describes the parameters.
- Click **Apply** to save and apply the configuration.

Table 3-19 Parameters for IPv6 MAC Address Filtering

Item	Description	
IPv6 MAC Filtering Enable	Enables or disables the IPv6 MAC address filtering function.	After setting, click Apply below to take effect.
IPv6 MAC Filtering Blacklist / Whitelist	Select the filtering mode. The white list and black list modes are global configuration, which cannot be enabled simultaneously. <ul style="list-style-type: none"> ◆ Whitelist indicates that the data complying with the rules defined in the filtering rule table will be allowed to pass. ◆ Blacklist indicates that the data complying with the rules defined in the filtering rule table will not be allowed to pass. 	
MAC Address	The IPv6 MAC address in the IPv6 MAC address filtering rule.	
Start Time	The starting time of the filtering rule.	

Table 3-19 Parameters for IPv6 MAC Address Filtering (Continued)

Item	Description
End Time	The ending time of the filtering rule.
Enable	Enables or disables this filtering rule. The options include Disable and Enable.

3.4.2 Remote Control

Enable or disable the remote access control. If the remote control is disabled, the PCs in the Internet cannot access the Web GUI of the ONT using the IP addresses at the WAN side; if enabled, the PCs in the Internet can access the Web GUI.

1. Select **Security** in the navigation bar and select **Remote Control**→**Remote Control** in the left link bar to open the remote control configuration page, as shown in Figure 3-31.

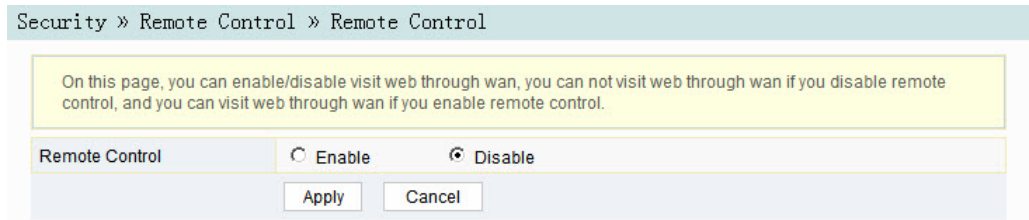


Figure 3-31 Remote Control

2. **Enable** or **Disable** the remote access control as required.
3. Click **Apply** to save and apply the configuration.

3.4.3 Dynamic DoS

The DoS attack exhausts the resource of target computer using massive virtual information flow, so that the attacked computer has to handle the virtual information with all strength, which influences the handling of normal information flow. The ONT provides the protection against the DoS attack.

1. Select **Security** in the navigation bar and select **DDOS**→**DDOS** in the left link bar to open the anti-DoS attack configuration page, as shown in Figure 3-32.

Figure 3-32 Dynamic DoS

2. Select to **Enable** or **Disable** the anti-dos attack function as required.
3. Click **Apply** to save and apply the configuration.

3.4.4 HTTPS

The ONT provides the HTTPS function. The HTTPS is the HTTP channel for security. It is built on the SSL+HTTP protocol, which can perform encryption transmission and identity authentication.

1. Select **Security** in the navigation bar and select **HTTPS**→**HTTPS** in the left link bar to open the HTTPS function configuration page, as shown in Figure 3-33.

Figure 3-33 HTTPS

2. Select to **Enable** or **Disable** the HTTPS function as required.



Caution:

After enabling the HTTPS function, log into the Web GUI. The protocol type in URL should be https and the management IP address should be added with the port number 4433, e.g. **https://192.168.1.1:4433**.

3. Click **Apply** to save and apply the configuration.

3.5 Application

The following introduces how to configure the DDNS, port forwarding, NAT, UPnP, DMZ and network diagnosis in the Web GUI.

3.5.1 DDNS

The DDNS server transforms the dynamic IP address at the WAN side of the ONT into a static domain name. Users from Internet can easily access the gateway using this domain name.

1. Select **Application** in the navigation bar and select **DDNS**→**DDNS Settings** in the left link bar to open the DDNS configuration page, as shown in Figure 3-34.

Figure 3-34 DDNS Settings

2. Configure parameters relevant to DDNS according to the requirement. Table 3-20 describes the parameters.
3. Click **Apply** to save and apply the configuration.

Table 3-20 Parameters for DDNS Settings

Item	Description
Username	The username allocated by the DDNS provider.
Password	The password allocated by the DDNS provider.
Host	The domain name allocated by the DDNS provider.
WAN Interface	Name of the created WAN connection.
DDNS Provider	The DDNS service provider. Users can select the preset DDNS provider or select Other to customize the provider and set the domain name, server IP address, protocol type and URL.

3.5.2 Port Forwarding

The port forwarding can create the mapping between the WAN port IP address / common port number and the LAN server IP address / private port number. In this way, all the accesses to a certain service port at this WAN port will be re-directed to the corresponding port of the server in the designated LAN.

1. Select **Application** in the navigation bar and select **Port Forwarding** → **Port Forwarding** in the left link bar. Click **Add** to open the port forwarding configuration page, as shown in Figure 3-35.

Application » Port Forwarding » Port Forwarding

On this page, you could configure port forwarding.

Add Delete Delete All

Port Forwarding Rules List

WAN	Description	Public Port	IP	Private Port	Protocol	Enable

WAN: INTERNET_R_VID_300

Description: (0-31 characters, including alphanumeric, '-' and '_')

Public Port: -

IP: -

Private Port: -

Protocol: ALL

Enable: Disable

Apply Cancel

Figure 3-35 Port Forwarding

2. Configure parameters relevant to port forwarding according to the requirement. Table 3-21 describes the parameters.
3. Click **Apply** to save and apply the configuration.

Table 3-21 Parameters for Port Forwarding

Item	Description
WAN	The corresponding WAN connection bound with the port forwarding rule.
Description	The port forwarding rule name.
Public Port	The range of ports for Extranet data packets. If only one port exists, enter the same port number.
IP	The IP address of the LAN virtual server for port forwarding.

Table 3-21 Parameters for Port Forwarding (Continued)

Item	Description
Private Port	The range of the LAN port for port forwarding. If only one port exists, enter the same port number.
Protocol	The protocol used for the port to forward data packets, including ALL, TCP and UDP.
Enable	Enables or disables the rule.

3.5.3 NAT

NAT allows the conversion between intranet IP addresses and public network IP addresses. NAT converts a great number of intranet IP addresses into one or a small number of public network IP addresses, so as to save the resource of public network IP addresses.

The NAT configuration below can take effect only when the NAT function is enabled in **Network** → **BroadBand Settings** → **Internet Settings**.

1. Select **Application** in the navigation bar and select **NAT** → **NAT** in the left link bar. Click **Add** to open the NAT rule list configuration page, as shown in Figure 3-36.

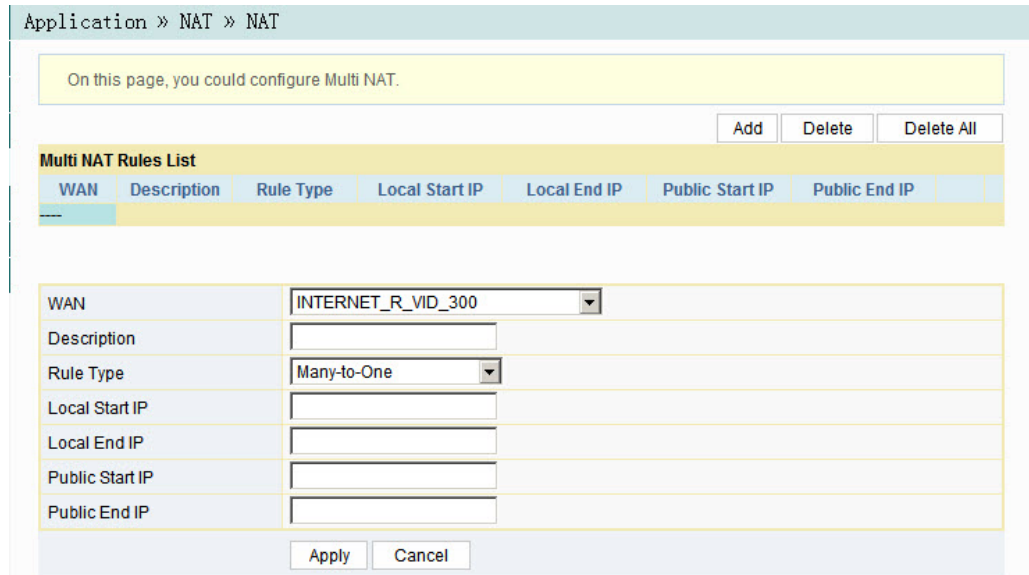


Figure 3-36 NAT

2. Configure relevant parameters according to the requirement. Table 3-22 describes the parameters.
3. Click **Apply** to save and apply the configuration.

Table 3-22 Parameters for NAT Configuration

Item	Description
WAN	The corresponding WAN connection bound with the NAT rule.
Description	NAT rule name.
Rule Type	Select the NAT conversion mode. It is advisable to select One-to-One or Many-to-One.
Local Start IP	The starting IP address of intranet.
Local End IP	The ending IP address of intranet.
Public Start IP	The starting IP address of the public network.
Public End IP	The ending IP address of the public network.

3.5.4 UPnP

The UPnP supports the plug and play function and the automatic discovery function of multiple network devices. When UPnP is enabled, the devices that supports UPnP can be added into the network dynamically. In this way, an external computer can access the resource on the internal computer when necessary. For example, when some application software are running on a PC, the port mapping table will be generated on the ONT automatically using the UPnP protocol, so that the operation can be sped up.

1. Select **Application** in the navigation bar and select **UPNP**→**UPNP** in the left link bar to open the UPnP configuration page, as shown in Figure 3-37.

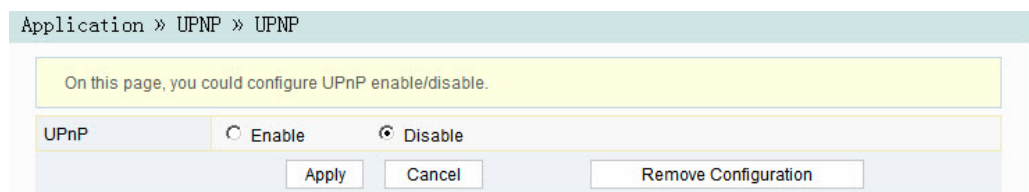


Figure 3-37 UPnP

2. Select to **Enable** or **Disable** the UPnP function as required.
3. Click **Apply** to save and apply the configuration.

3.5.5 DMZ

When the ONT is working in the routing mode, users should enable the DMZ function if a host at the WAN side needs to access a certain host at the LAN side. The ONT will forward all the IP packets from the WAN to the designated DMZ host.

1. Select **Application** in the navigation bar and select **DMZ**→**DMZ** in the left link bar to open the DMZ configuration page, as shown in Figure 3-38.

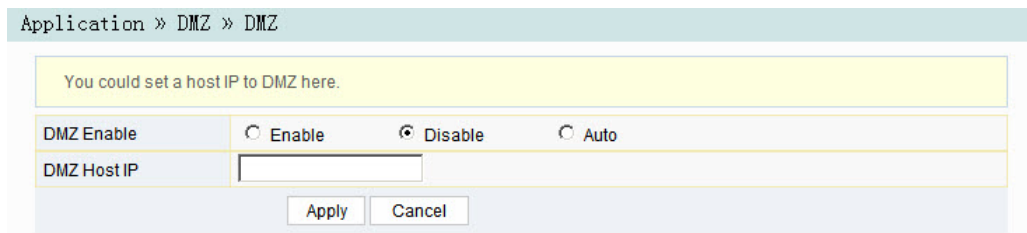


Figure 3-38 DMZ

2. Configure relevant parameters according to the requirement. Table 3-23 describes the parameters.
3. Click **Apply** to save and apply the configuration.

Table 3-23 Parameters for DMZ Configuration

Item	Description
DMZ Enable	Enables or disables the DMZ function. The options include Enable, Disable and Auto. If Enable is selected, the DMZ host IP address should be set. If Auto is selected, the DMZ host uses the first IP address allocated by DHCP.
DMZ Host IP	The host IP address of the DMZ.

3.5.6 Network Diagnosis

The ONT provides two network diagnosis tools.

- ◆ Ping test: Test whether the router is normally connected with the target host or another device.
 - ◆ Traceroute test: Check the routing condition from the router to the target host.
1. Select **Application** in the navigation bar and select **Diagnosis**→**Diagnosis** in the left link bar to open the network diagnosis page, as shown in .

Application » Diagnosis » Ping Diagnosis

On this page, you could do ping diagnosis.

Interface	LAN
Repeated Times	4 * (1-10)
Destination Address	192.168.1.123 *

Diagnosis

PING 192.168.1.123 (192.168.1.123): 56 data bytes

--- 192.168.1.123 ping statistics ---

4 packets transmitted, 0 packets received, 100% packet loss

Figure 3-39 Network Diagnosis

2. Enter the destination IP address to be tested in the **Destination Address** box, and click **Ping** or **Traceroute** to test. The test result will be displayed in the lower text box.

3.6 Management

The following introduces how to perform account management, device management and log management in the Web GUI.

3.6.1 Account Management

Account management includes user account management and maintenance account management.

3.6.1.1 User Account Management

Users can add or delete a common user account or modify the password of a common user account.

1. Select **Management** in the navigation bar. Select **Account Management** → **User Account** from the left link bar to open the user account management page, as shown in Figure 3-40.

Figure 3-40 User Account Management

2. Add or delete a common user account or modify the password of a common user account as required.
3. Click **Apply** to save and apply the configuration.

3.6.1.2 Maintenance Account Management

Users can modify the username and password of the current account.

1. Select **Management** in the navigation bar. Select **Account Management** → **Maintenance Account** from the left link bar to open the maintenance account management page, as shown in Figure 3-41.

Figure 3-41 Maintenance Account Management

2. Modify the username and password of the current account as required.
3. Click **Apply** to save and apply the configuration.

3.6.2 Device Management

The ONT provides multiple device management functions such as restoring some of the configuration data, local upgrade, configuration backup, FTP server, device reboot, and NTP time calibration.

3.6.2.1 Restoring the Configuration Data

Restore factory settings of the ONT, including user name and password for Web login, SSID and password for wireless network, etc.

1. Select **Management** in the navigation bar. Select **Device Management** → **Restore** from the left link bar to open the configuration restoring page, as shown in Figure 3-42.

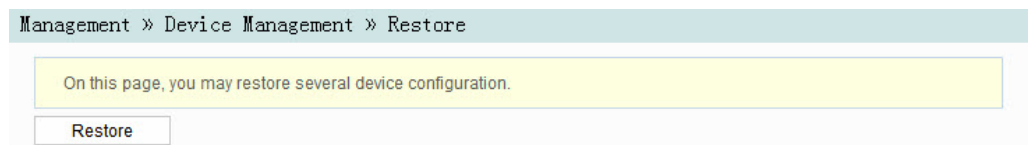


Figure 3-42 Restoring the Configuration Data

2. Click **Restore** and then click **OK** in the alert box that appears. Wait until the configuration data are completely restored.

3.6.2.2 Local Upgrade

Select the local file and upgrade the ONT software. During upgrade, do not power off the device or perform other operations to prevent damage to the device.

1. Select **Management** in the navigation bar. Select **Device Management** → **Local Upgrade** from the left link bar to open the local upgrade page, as shown in Figure 3-43.

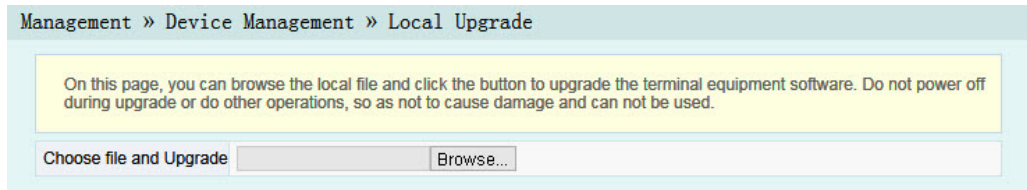


Figure 3-43 Local Upgrade

2. Click **Browse**. In the dialog box that appears, select the device software version to be upgraded and click **Open** to upgrade the ONT software version.
3. When the upgrade succeeds, the page will prompt for device rebooting. Click "Reboot". After rebooting, the device will be upgraded to the new version.



Note:

After the upgrade, users can view the **Software Version** in the device information page to check whether the current version is correct.

3.6.2.3 Configuration Backup

Back up and save the ONT configuration files for restoring the configuration data later on. Before backup, enable the FTP tool in the computer.

1. Select **Management** in the navigation bar. Select **Device Management** → **Config Backup** from the left link bar to open the configuration backup page, as shown in Figure 3-44.

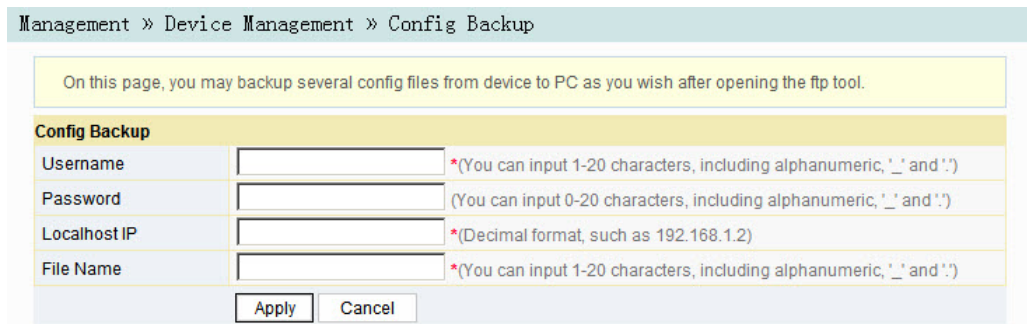


Figure 3-44 Configuration Backup

2. Configure parameters relevant to file backup. Table 3-24 describes the parameters.
3. Click **Apply** to save the configuration backup file.

Table 3-24 Parameters for Configuration Backup

Item	Description
Username	The FTP username.
Password	The FTP password.
Localhost IP	Local IP address.
File Name	The existing file name in the ONT.

3.6.2.4 FTP Server

With the FTP server function of the ONT enabled, users can access the ONT resources via the FTP client end on the PC.

1. Select **Management** in the navigation bar. Select **Device Management** → **FTP Server** from the left link bar to open the FTP server configuration page, as shown in Figure 3-45.

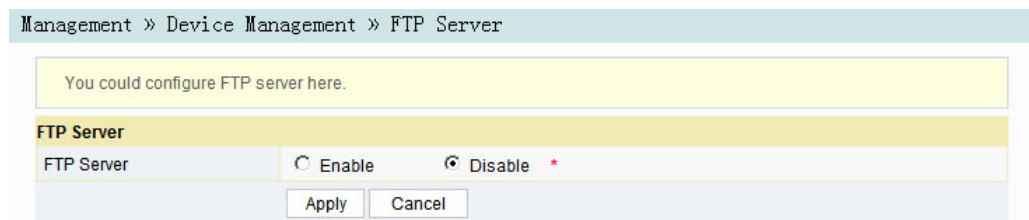


Figure 3-45 FTP Server

2. Enable or disable the FTP server function according to the requirement. Select **Enable** and then enter the **Username** and **Password** for connection with the FTP server.
3. Click **Apply** to save and apply the configuration.

3.6.2.5 Device Reboot

1. Select **Management** in the navigation bar. Select **Device Management** → **Device Reboot** from the left link bar to open the device reboot page, as shown in Figure 3-46.

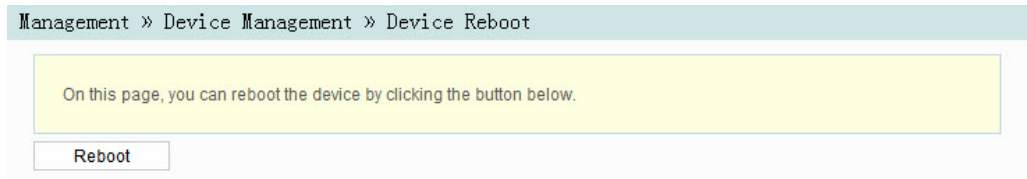


Figure 3-46 Device Reboot

2. Click **Reboot** and click **OK** in the alert box that appears and wait for the device to reboot.



Caution:

Save the configuring data before rebooting the device to prevent loss of the configuration data.

After the device is rebooted, you need to wait for about two minutes to re-log into the Web GUI of the device.

3.6.2.6 NTP Time Calibration

Users can obtain the precise time by connecting the ONT to a NTP server.

1. Select **Management** in the navigation bar. Select **Device Management** → **NTP Check Time** from the left link bar to open the NTP check time page, as shown in Figure 3-47.

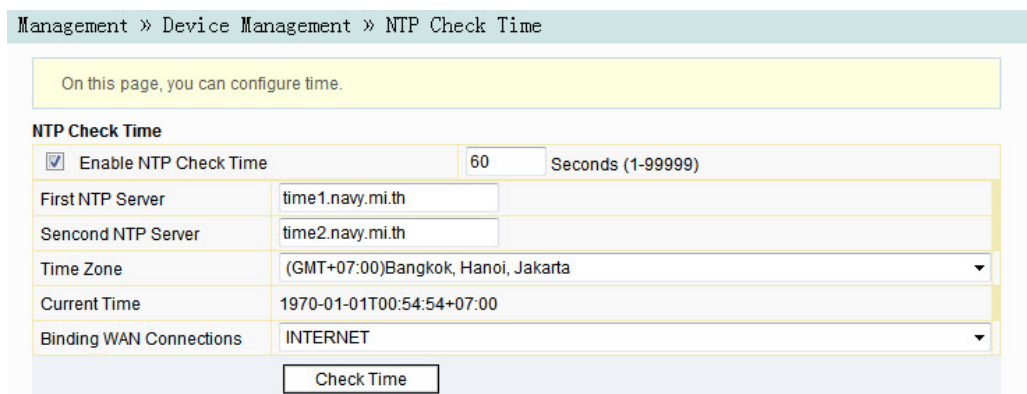


Figure 3-47 NTP Time Calibration

2. Configure parameters relevant to the NTP time calibration. Table 3-25 describes the parameters.
3. Click **Check Time** to save and apply the configuration.

Table 3-25 Parameters for NTP Time Calibration

Item	Description
Enable NTP Check Time	Select whether to enable the NTP time calibration function.
Seconds	Sets the time interval for synchronization with the time server.
First NTP Server	Enter the IP address of the active NTP server.
Second NTP Server	Enter the IP address of the standby NTP server.
Time Zone	Select the time zone according to the location of the device.
Current Time	When NTP Check Time is enabled, time will be calibrated according to the equipment location, and the local time will be displayed. When NTP Check Time is disabled, the system initial time (1970-01-01) or the previous calibrated time will be displayed.
Binding WAN Connections	Select the WAN connection type for time calibration.

3.6.3 Log Management

The Log files record key operations and actions on the ONT. Users can view the information saved in log as needed.

Select **Management** in the navigation bar. Select **Log**→**Log** from the left link bar to open the log information page, as shown in Figure 3-48.

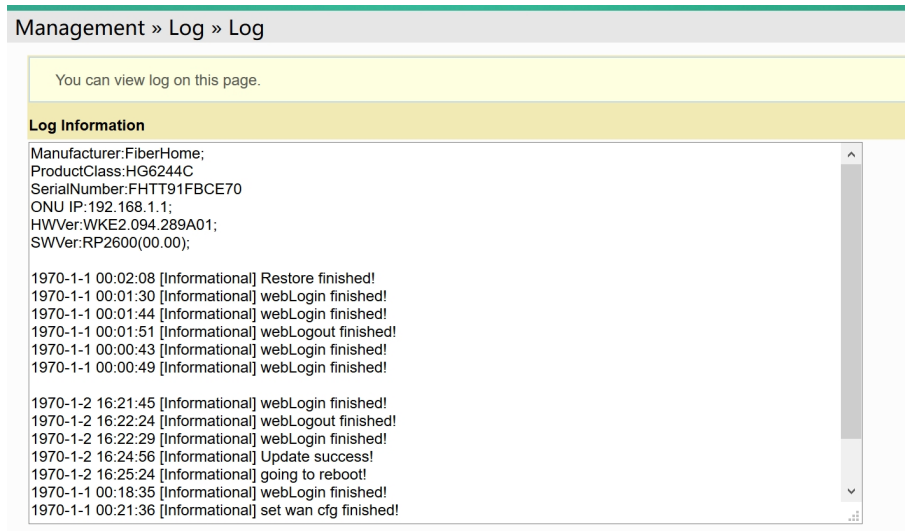


Figure 3-48 Log

4 Handling Common Problems

The following introduces how to handle common problems encountered in equipment operation and service test.

- Power Status Indicator LED Extinguished
- Register Status Indicator LED Extinguished
- Optical Signal Status Indicator LED Blinking
- Ethernet Interface Status Indicator LED Extinguished
- Failing to Access Local Web Login GUI and Failing to Ping 192.168.1.1
- Failing to Access Internet Using the LAN Port
- Measured Internet Access Rate Lower or Higher Than The Standard Value
- Connection to IPTV Failed
- IPTV Picture Suspended
- Test of Voice Service Failed

4.1 Power Status Indicator LED Extinguished

Handle the problem according to the procedures below:

1. Check whether the mains supply is normal.
2. Check whether the power adapter matches the device.
3. Check whether the power button is pressed down.
4. Check whether the power cable connection is normal.

4.2 Register Status Indicator LED Extinguished

Handle the problem according to the procedures below:

1. Check whether the device power supply is normal.
2. Check whether the optical fiber connection is normal.
3. Check whether the ONT has obtained the ISP authorization.
4. Check whether the optical interface is normal; if not, replace the device.

4.3 Optical Signal Status Indicator LED Blinking

Handle the problem according to the procedures below:

1. Check whether the optical fiber is damaged.
2. Check whether the optical fiber is connected to the correct interface.
3. Check whether the Rx optical power of the ONT (measured with the optical power meter) is below specifications.
4. Check whether the ONT optical module is aged or damaged.
5. Check whether the local device is faulty.

4.4 Ethernet Interface Status Indicator LED Extinguished

Handle the problem according to the procedures below:

1. Check whether the network cable is damaged or connected incorrectly.
2. Check whether the color-coding scheme of the network cable is incorrect; if so, replace it with a standard CAT-5 twisted pair network cable.
3. Check whether the network cable length exceeds the allowed range (100m).

4.5 Failing to Access Local Web Login GUI and Failing to Ping 192.168.1.1

Handle the problem according to the procedures below:

1. Check whether the LAN port indicator LED is ON; if not, replace the network cable.
2. Check whether the computer is set with a fixed IP address in the network segment of 192.168.1.x.

4.6 Failing to Access Internet Using the LAN Port

Handle the problem according to the procedures below:

1. Check whether the computer is set with a fixed IP address. If yes, modify the configuration so that the computer can obtain an IP address automatically. Then retry the connection.
2. If the computer is obtaining IP addresses automatically, check whether the computer has obtained an IP address in the network segment of 192.168.x.x.
3. Contact the personnel in the network management center to check whether the WAN is connected correctly and bound with the LAN port.

4.7 Measured Internet Access Rate Lower or Higher Than The Standard Value

Contact the personnel in the network management center to check whether the bandwidth profile is configured correctly and bound to the ONT.

4.8 Connection to IPTV Failed

Handle the problem according to the procedures below:

1. Check whether the STB is connected to the ONT port correctly and configured with IPTV account number and password correctly.
2. Contact the network management center to check whether the IPTV service work order has been delivered.
3. Check whether the ONT connection port is the service port bound with the IPTV work order.

4.9 IPTV Picture Suspended

Handle the problem according to the procedures below:

1. Check whether the quality of the network cable connecting the STB (Set Top Box) is satisfactory.
2. Contact the network management center to check whether the IPTV service is bound with the rate limiting profile correctly.
3. Replace the STB.

4.10 Test of Voice Service Failed

Handle the problem according to the procedures below:

1. Check whether you can hear the current tone when you go off-hook; if no, check whether the phone cable is connected correctly.
2. Check whether you can hear the dial tone when you go off-hook; if no, contact the network management center to check whether the voice service work order has been delivered correctly and whether the uplink device has delivered the configuration data to the voice service port of the ONT.
3. Log into the ONT to check whether it has obtained an IP address for voice service .
4. Contact the softswitch platform to check whether the voice node data have been configured.

5 Standards and Protocols

Classification	Standard Number	Title
GPON	ITU-T G.984.1	Gigabit-capable passive optical networks (GPON): General characteristics
	ITU-T G.984.2	Gigabit-capable Passive Optical Networks (GPON): Physical Media Dependent (PMD) layer specification
	ITU-T G.984.3	Gigabit-capable Passive Optical Networks (G-PON): Transmission convergence layer specification
	ITU-T G.984.4	Gigabit-capable passive optical networks (G-PON): ONT management and control interface specification
Ethernet	IEEE 802-2001	IEEE Standard for Local and Metropolitan Area Networks: Overview and Architecture
	IEEE 802.1D-2004	IEEE Standard for Local and metropolitan area networks: Media Access Control (MAC) Bridges
	IEEE 802.1Q-2005	IEEE Standard for Local and Metropolitan Area Networks - Virtual Bridged Local Area Networks - Amendment 4: Provider Bridges
	IEEE 802.1ad	IEEE Standard for Local and Metropolitan Area Networks - Virtual Bridged Local Area Networks - Amendment 4: Provider Bridges
	IEEE 802.1x-2004	IEEE Standard for Local and Metropolitan Area Networks Port- Based Network Access Control
	IEEE 802.1ag-2007	IEEE Standard for Local and Metropolitan Area Networks Virtual Bridged Local Area Networks Amendment 5: Connectivity Fault Management
	IEEE 802.3-2005	IEEE Standard for Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications
	IEEE 802.3z	Gigabit Ethernet Standard
	IEEE 802.1p	Traffic class expediting and dynamic multicast filtering. Describes important methods for providing QoS at MAC level
	TR-101	Migration to Ethernet-Based Broadband Aggregation
TR-143	Enabling Network Throughput Performance Tests and Statistical Monitoring	
VoIP	ITU-T G.711	Pulse code modulation (PCM) of voice frequencies
	ITU-T G.711.1	Wideband embedded extension for G.711 pulse code modulation
	ITU-T G.722	7 kHz audio-coding within 64 kbit/s

Classification	Standard Number	Title
	ITU-T G.723.1	Dual rate speech coder for multimedia communications transmitting at 5.3 and 6.3 kbit/s
	ITU-T G.729	Coding of speech at 8 kbit/s using conjugate-structure algebraic-code-excited linear prediction (CS-ACELP)
	ITU-T G.729.1	G.729 based Embedded Variable bit-rate coder: An 8-32 kbit/s scalable wideband coder bitstream interoperable with G.729
	ITU-T G.165	Echo Cancellers
	ITU-T G.168	Digital network echo cancellers
Multicast	IETF RFC 2236	Internet Group Management Protocol, Version 2
	IETF RFC 3376	Internet Group Management Protocol, Version 3
	IETF RFC 4541	Considerations for Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) Snooping Switches
Time	IETF RFC 1305	Network Time Protocol (Version 3) Specification, Implementation and Analysis
	IETF RFC 2030	Simple Network Time Protocol (SNTP) Version 4 for IPv4, IPv6 and OSI
EMC	EN 300 386	Electromagnetic compatibility and Radio spectrum Matters (ERM); Telecommunication network equipment; Electromagnetic Compatibility (EMC) requirements
	CISPR 22 (EN55022)	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement
	CISPR 24 (EN55024)	Information technology equipment - Immunity characteristics - Limits and methods of measurement
Other	TR-069	CPE WAN Management Protocol

Appendix A Abbreviations

ONT	Optical Network Terminal
FTTH	Fiber To The Home
GPON	Gigabit-capable Passive Optical Network
ODN	Optical Distribution Network
OLT	Optical Line Termination
DBA	Dynamic Bandwidth Allocation
XML	Extensible Markup Language
GEM	GPON Encapsulation Mode
ATM	Asynchronous Transfer Mode
OAM	Operation, Administration And Maintenance
FEC	Forward Error Correction
TDMA	Time Division Multiple Access
PLOAM	Physical Layer Operations, Administration and Maintenance
OMCI	ONU Management and Control Interface
T-CONT	Transmission Container
NSR	Network Security Recorder
AES	Advanced Encryption Standard
MAC	Medium Access Control
IGMP	Internet Group Management Protocol
VLAN	Virtual Local Area Network
QoS	Quality of Service
ACL	Access Control List
WRR	Weighted Round Robin
DHCP	Dynamic Host Configuration Protocol
PPPoE	Point to Point Protocol over Ethernet
NAT	Network Address Translation
DMZ	Demilitarized Zone

ARP	Address Resolution Protocol
UPnP	Universal Plug and Play
DoS	Denial of Service
DDoS	Distributed Denial of Service
URL	Uniform Resource Locator
HTTPS	Hyper Text Transfer Protocol over Secure Socket Layer
CATV	Cable Antenna Television
CoS	Class of Service
SIP	Session Initiation Protocol
VoIP	Voice over Internet Protocol
RTP	Real-time Transport Protocol
IGD_WLAN_SSID	Service Set Identifier
WAN	Wide Area Network
LAN	Local Area Network
WLAN	Wireless Local Area Networks
MTU	Maximum Transmission Unit
PPPoE	Point to Point Protocol over Ethernet
DTMF	Dual Tone Multi Frequency
VPN	Virtual Private Network
DDNS	Dynamic Domain Name Server
FTP	File Transfer Protocol
ADSL	Asymmetric Digital Subscriber Line
BRAS	Broadband Remote Access Server
BSC	Base Station Controller
CDR	Call Detail Record
CPE	Customer Premise Equipment
DSL	Digital Subscriber Line
DSLAM	Digital Subscriber Line Access Multiplexer
EFM	Ethernet in the First Mile
EMC	Electro Magnetic Compatibility
EPON	Ethernet Passive Optical Network
EPRS	Ethernet Ring Protection Switching

FDB	Forwarding Database
FoIP	Fax over IP
FTTA	Fiber To The Antenna
FTTB	Fiber To The Building
FTTC	Fiber To The Curb
FTTDp	Fiber To The Distribution Point
FTTM	Fiber To The Mobile
FTTO	Fiber To The Office
GUI	Graphical User Interface
HG	Home Gateway
ISDN	Integrated Services Digital Network
ICMP	Internet Control Message Protocol
IMS	IP Multimedia Subsystem
IP	Internet Protocol
LACP	Link Aggregation Control Protocol
LAN	Local Area Network
MDU	Multi-Dwelling Unit
MGC	Media Gateway Controller
MGCP	Media Gateway Control Protocol
MLD	Multicast Listener Discover
MoIP	Modem over IP
MTBF	Mean Time Between Failure
MSAN	Multi-Service Access Network
MSTP	Multiple Spanning Tree Protocol
NGN	Next Generation Network
OLT	Optical Line Termination
OSPF	Open Shortest Path First
OTDR	Optical Time Domain Reflectometer
PON	Passive Optical Network
POTS	Plain Old Telephone Service
ppm	parts per million
PRI	Primary Rate Interface
PSTN	Public Switched Telephone Network
QinQ	802.1Q-in-802.1Q

RIP	Routing Information Protocol
RNC	Radio Network Controller
RSTP	Rapid Spanning Tree Protocol
RSSI	Received Signal Strength Indication
SBA	Static Bandwidth Allocation
SBU	Single Business Unit
SCB	Single Copy Broadcast
SDH	Synchronous Digital Hierarchy
SFU	Single Family Unit
SHDSL	Single-pair High bit rate Digital Subscriber Line
SNI	Service Node Interface
SNMP	Simple Network Management Protocol
SP	Strict Priority
STB	Set Top Box
STM	Synchronous Transport Module
STP	Straight-Through Processing
SSH	Secure Shell
TCP	Transmission Control Protocol
TDM	Time Division Multiplex
TG	Trunk Gateway
TOD	Time of Day
ToS	Type of Service
UDP	User Datagram Protocol
UNI	User-Network Interface
VDN	Video Distribution Network
VDSL	Very High Speed Digital Subscriber Line
WDM	Wavelength Division Multiplexing

Product Documentation Customer Satisfaction Survey

Thank you for reading and using the product documentation provided by FiberHome. Please take a moment to complete this survey. Your answers will help us to improve the documentation and better suit your needs. Your responses will be confidential and given serious consideration. The personal information requested is used for no other purposes than to respond to your feedback.

Name	
Phone Number	
Email Address	
Company	

To help us better understand your needs, please focus your answers on a single documentation or a complete documentation set.

Documentation Name	
Code and Version	

Usage of the product documentation:

1. How often do you use the documentation?

Frequently Rarely Never Other (please specify) _____

2. When do you use the documentation?

in starting up a project in installing the product in daily maintenance in trouble shooting Other (please specify) _____

3. What is the percentage of the operations on the product for which you can get instruction from the documentation?

100% 80% 50% 0% Other (please specify) _____

4. Are you satisfied with the promptness with which we update the documentation?

Satisfied Unsatisfied (your advice) _____

5. Which documentation form do you prefer?

Print edition Electronic edition Other (please specify) _____

Quality of the product documentation:

1. Is the information organized and presented clearly?

Very Somewhat Not at all (your advice) _____

2. How do you like the language style of the documentation?

Good Normal Poor (please specify) _____

3. Are any contents in the documentation inconsistent with the product?

4. Is the information complete in the documentation?

Yes

No (Please specify) _____

5. Are the product working principles and the relevant technologies covered in the documentation sufficient for you to get known and use the product?

Yes

No (Please specify) _____

6. Can you successfully implement a task following the operation steps given in the documentation?

Yes (Please give an example) _____

No (Please specify the reason) _____

7. Which parts of the documentation are you satisfied with?

8. Which parts of the documentation are you unsatisfied with? Why?

9. What is your opinion on the Figures in the documentation?

Beautiful Unbeautiful (your advice) _____

Practical Unpractical (your advice) _____

10. What is your opinion on the layout of the documentation?

Beautiful Unbeautiful (your advice) _____

11. Thinking of the documentations you have ever read offered by other companies, how would you compare our documentation to them?

Product documentations from other companies: _____

Satisfied (please specify) _____

Unsatisfied (please specify) _____

12. Additional comments about our documentation or suggestions on how we can improve:

Thank you for your assistance. Please fax or send the completed survey to us at the contact information included in the documentation. If you have any questions or concerns about this survey please email at

edit@fiberhome.com