

FILE NO.

REV	DESCRIPTION	DRAWN	CHKD	APP
2	UPDATE DRAWINGS TO NEW STANDARDS	ZAW	JDM	HA
		ZAW	JDM	HA
	DATE: 09/19/12			

REVISIONS

UPDATE DRAWINGS TO NEW STANDARDS

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

ZAW

JDM

HA

DATE: 09/19/12

**RSL TOWER KITS**

HEIGHT	KIT NO.	SECTIONS	TOP HORZ BRACE
100' (30)	RSL100L10	R1-R10H	RSLH1A
90' (27)	RSL90L19	R1-R9H	RSLH1A
	RSL90L20	R2-R10H	RSLH2A
80' (24)	RSL80L18	R1-R8H	RSLH1A
	RSL80L29	R2-R9H	RSLH2A
	RSL80L30	R3-R10H	RSLH3A
	RSL70L17	R1-R7	RSLH1A
70' (21)	RSL70L28	R2-R8H	RSLH2A
	RSL70L39	R3-R9H	RSLH3A
	RSL70L40	R4-R10H	RSLH4A
60' (18)	RSL60L16	R1-R6	RSLH1A
	RSL60L49	R4-R9H	RSLH4A
	RSL60L50	R5-R10H	RSLH5A
50' (15)	RSL50L15	R1-R5	RSLH1A
	RSL50L59	R5-R9H	RSLH5A
	RSL50L60	R6-R10H	RSLH6A
40' (12)	RSL40L14	R1-R4	RSLH1A
	RSL40L70	R7-R10H	RSLH7A
30' (9)	RSL30L13	R1-R3	RSLH1A
	RSL30H80	R8H-R10H	RSLH8A
20' (6)	RSL20L12	R1-R2	RSLH1A
	RSL20H90	R9H-R10H	RSLH9A

**RSL GENERAL NOTES**


- DIMENSIONS INDICATED FOR HEIGHTS, FACE WIDTHS AND MEMBER LENGTHS ARE NOMINAL AND MAY VARY WITH THE BASE AND TOP MOUNT OPTIONS SELECTED. ACTUAL DIMENSIONS FOR SPECIFIC CONFIGURATIONS ARE AVAILABLE UPON REQUEST.
- ALL DIMENSIONS IN PARENTHESES ARE IN METERS, UNLESS OTHERWISE NOTED.
- MATERIAL SPECIFICATIONS: LEGS: 65 KSI (450 MPa); 1" (25.4 mm) DIA. BRACES: 30 KSI (210 MPa); 1-1/4" (32 mm) DIA. BRACES; 50 KSI (350 MPa); ANGLES: 50 KSI (350 MPa); BASE PLATES: 50 KSI (350 MPa); 3/8" (10 mm) DIA. BRACE BOLTS, GR5; 5/8" (16 mm) DIA. LEG SPLICE BOLTS, A325. ALL MATERIAL GALVANIZED AFTER FABRICATION IN ACCORDANCE WITH ANSII/TIA-222-G.
- DESIGNS ASSUME MAINTENANCE AND INSPECTION WILL BE PERFORMED OVER THE LIFE OF THE STRUCTURE IN ACCORDANCE WITH ANSII/TIA-222-G. ALL TOWERS SHOULD BE THOROUGHLY INSPECTED BY QUALIFIED PERSONNEL AND RE-MARKED AS REQUIRED WITH APPROPRIATE DANGER AND ANTI-CLIMB LABELS AT LEAST TWICE A YEAR TO ENSURE SAFETY AND PROPER PERFORMANCE.
- STANDARD RSL TOWERS ARE INTENDED TO BE CLIMBED BY SKILLED AND COMPETENT CLIMBERS ONLY. THE STANDARD RSL TOWER KITS CONFORM TO BOTH CLASS A AND CLASS B ANSII/TIA-222-G CLIMBING FACILITIES WHEN STEP BOLTS ARE PROVIDED WITH A SAFETY CLIMB DEVICE.
- FOUNDATIONS MUST BE DESIGNED FOR THE CONDITIONS EXISTING AT A SITE. THE ADEQUACY OF STANDARD FOUNDATIONS MUST BE DETERMINED PRIOR TO INSTALLATION.

**RSL ASSEMBLY NOTES**

- INSTALLATION AND DISMANTLING MUST BE PERFORMED BY QUALIFIED AND EXPERIENCED PERSONNEL AND BE IN CONFORMANCE WITH ANSII/TIA-222-G AND ANSII/TIA-1019-A.
- DO NOT INSTALL OR DISMANTLE STRUCTURES WITHIN FALLING DISTANCE OF ELECTRICAL AND/OR TELEPHONE LINES WITHOUT TAKING SPECIAL PRECAUTIONS IN ACCORDANCE WITH THE APPROPRIATE UTILITY.
- ALL MEMBERS ARE STAMPED WITH A PART NUMBER. ALL LEGS MUST BE INSTALLED WITH THE LEG PART NUMBER AT THE BOTTOM OF THE SECTION FOR PROPER FIT UP. LEG SPLICE HARDWARE IS INCLUDED IN THE SECTION KIT FOR THE UPPER SECTION AT A SPLICE. ALL BRACES FOR A GIVEN SECTION ARE OF THE SAME LENGTH.
- ALL BOLTED CONNECTIONS AND ANCHOR BOLTS (WHEN UTILIZED) MUST BE TIGHTENED TO A SNUG TIGHT CONDITION AS A MINIMUM (MEMBERS IN FIRM CONTACT) AND MUST INCLUDE A NUT LOCKING DEVICE OR SELF-LOCKING NUT (INCLUDED WITH TOWER KIT). NO MINIMUM BOLT TENSION OR TORQUE VALUES ARE REQUIRED. NO FIELD WELDING IS REQUIRED. WHEN LOCK WASHERS ARE USED AS A NUT LOCKING DEVICE, REPLACE ANY DAMAGED WASHERS DUE TO OVER TIGHTENING. INSTALLATION MUST BE GROUNDED IN ACCORDANCE WITH LOCAL AND NATIONAL CODES. ANSII/TIA-222-G REQUIRES THAT THE RESISTANCE TO GROUND MUST NOT EXCEED 10 OHMS. ADDITIONAL GROUNDING MAY BE REQUIRED IN ADDITION TO THE ROHN STANDARD GROUNDING KIT AVAILABLE AS AN OPTION FOR THE RSL TOWER DEPENDING ON THE SOIL CONDITIONS AT A SITE.
- INSTALLATION MUST BE IN CONFORMANCE WITH LOCAL, STATE AND FEDERAL REQUIREMENTS FOR OBSTRUCTION MARKING AND LIGHTING.
- WARNING PLATE PART NUMBER AVCS PROVIDED WITH AN RSL TOWER KIT MUST BE INSTALLED IN A HIGHLY VISIBLE LOCATION AT THE BASE OF THE TOWER.

**RSL ORDERING INFORMATION**

- FOUNDATION BASES MUST BE ORDERED SEPARATELY.
- ALL ACCESSORIES MUST BE ORDERED SEPARATELY INCLUDING STEP BOLT KITS, SAFETY CLIMB SYSTEMS, CLIMBING HARNESS WITH SLIDER, GROUNDING KITS, LIGHTNING RODS, TOP PLATE, TOP MAST, MOUNTING KITS, W/G BRACKETS, ANTI-CLIMB ASSEMBLIES, ETC.
- ROHN STANDARD RSL TOWER KITS ARE SUPPLIED WITH LOCK WASHERS AS NUT LOCKING DEVICES. PAL NUTS (P), ANCO NUTS (A) AND TRI-LOC NUTS (T) ARE ALTERNATIVE NUT LOCKING DEVICES THAT MAY BE OBTAINED BY ADDING THE INDICATED SUFFIX TO THE STANDARD RSL TOWER KIT PART NUMBER. (NOTE: NUT LOCKING DEVICES ARE REQUIRED IN ACCORDANCE WITH ANSII/TIA-222-G.)
- ALL THREE TOWER LEGS IN EACH SECTION HAVE PROVISION TO INSTALL STEP BOLTS AND A SAFETY CLIMB SYSTEM. WHEN STEP BOLTS ARE DESIRED, ONE STEP BOLT KIT MUST BE ORDERED FOR EACH SECTION OF THE TOWER. INCREASE THE NUMBER OF STEP BOLT KITS ACCORDINGLY WHEN STEP BOLTS ARE DESIRED ON MORE THAN ONE TOWER LEG OF A SECTION.

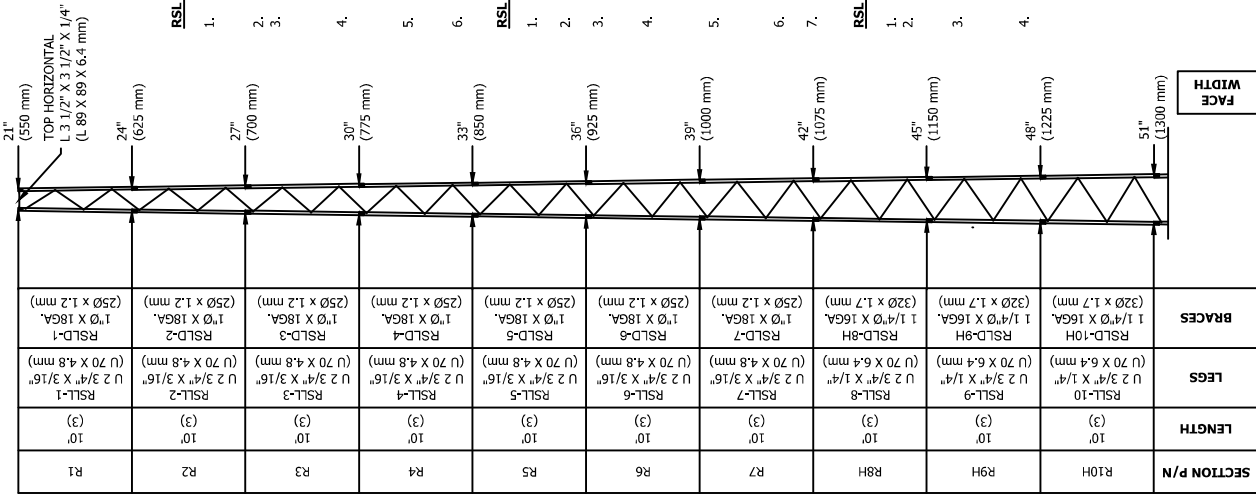

PO BOX 5999  
PEORIA, IL 61601-5999  
TOLL FREE 800-727-ROHN

THIS DRAWING IS THE PROPERTY OF ROHN. IT IS NOT TO BE REPRODUCED, COPIED OR TRACED IN WHOLE OR IN PART WITHOUT OUR WRITTEN CONSENT.

RSL TOWER  
ASSEMBLY DRAWING  
TUBE BRACING

DRAWN: ZAW  
CHKD: JDM  
DATE: 08/08/12

ENGR: HA  
SHEET # 1 OF 1

PROJ. ENGR: OH  
PROJ. MANGER:

DRAWING NO: RSLT-01-A1  
REV: 2

FILE NO.		RSL-TOWER	
REVISIONS			
REV	DESCRIPTION	DWN	CHK APP
3	UPDATED DRAWINGS TO REV STANDARDS	ZAW	JDM HA
	DATE: 09/19/12		

REV		DESCRIPTION		DWN	CHK APP
3		ZAW	JDM	HA	

REV		DESCRIPTION		DWN	CHK APP

**ROHN**  
PRODUCTS  
PO BOX 5999  
PEORIA, IL 61601-5999  
TOLL FREE 800-727-ROHN

THIS DRAWING IS THE PROPERTY OF ROHN. IT IS NOT TO BE REPRODUCED, COPIED OR TRACED IN WHOLE OR IN PART WITHOUT OUR WRITTEN CONSENT.

RSL TOWER  
SECTION DETAILS  
TUBE BRACING


DWN:	CEJ	CHKD:	JDM	DATE:	05/21/12
ENGR:	HA	SHEET #:	1 OF 2		
PRL ENGR:	OH	PRL MGR:			

DRAWING NO:	RSLT-01-A2
REV:	3


SECTION	NOMINAL BRACE LENGTH
R1	38" (965 mm)
R2	40" (1016 mm)
R3	42" (1067 mm)
R4	44" (1118 mm)
R5	46" (1168 mm)
R6	48" (1219 mm)
R7	50" (1270 mm)
R8H	52" (1321 mm)
R9H	55" (1397 mm)
R10H	57" (1448 mm)

**REFER TO SHEET 2 FOR SECTION BILL OF MATERIALS**


**NOTE:**  
1. NOMINAL METRIC EQUIVALENTS ARE GIVEN FOR REFERENCE ONLY AND SHALL NOT BE SUBSTITUTED FOR THE DESCRIBED SIZES UNLESS OTHERWISE APPROVED BY ROHN PRODUCTS.  
2. ALL DIMENSIONS IN PARENTHESES ARE IN METERS, UNLESS OTHERWISE NOTED.

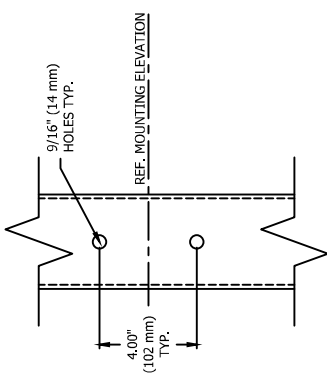

**VIEW B-B**  
ACCESSORY MOUNTING HOLES IN EACH LEG LOCATED FOR NOMINAL MOUNTING ELEVATIONS 6" (150 mm) FROM EACH END AND THE 3" (910 mm), 5" (1520 mm) AND 7" (2130 mm) ELEVATIONS OF EACH SECTION.

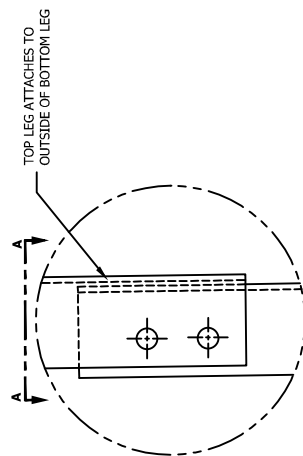


**LEG SPLICE DETAIL**

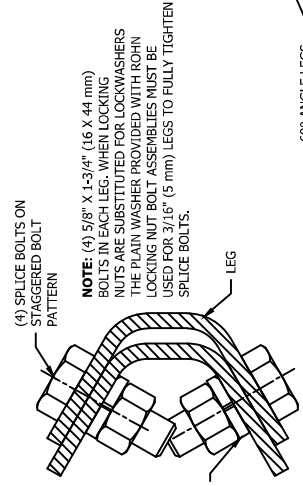


**NOTE:** (4) 5/8" X 1-3/4" (16 X 44 mm) BOLTS IN EACH LEG, WHEN LOCKING NUTS ARE SUBSTITUTED FOR LOCKWASHERS THE PLAIN WASHER PROVIDED WITH ROHN LOCKING NUT BOLT ASSEMBLIES MUST BE USED FOR 3/16" (5 mm) LEGS TO FULLY TIGHTEN SPLICE BOLTS.

**VIEW A-A**

**CROSS SECTION**

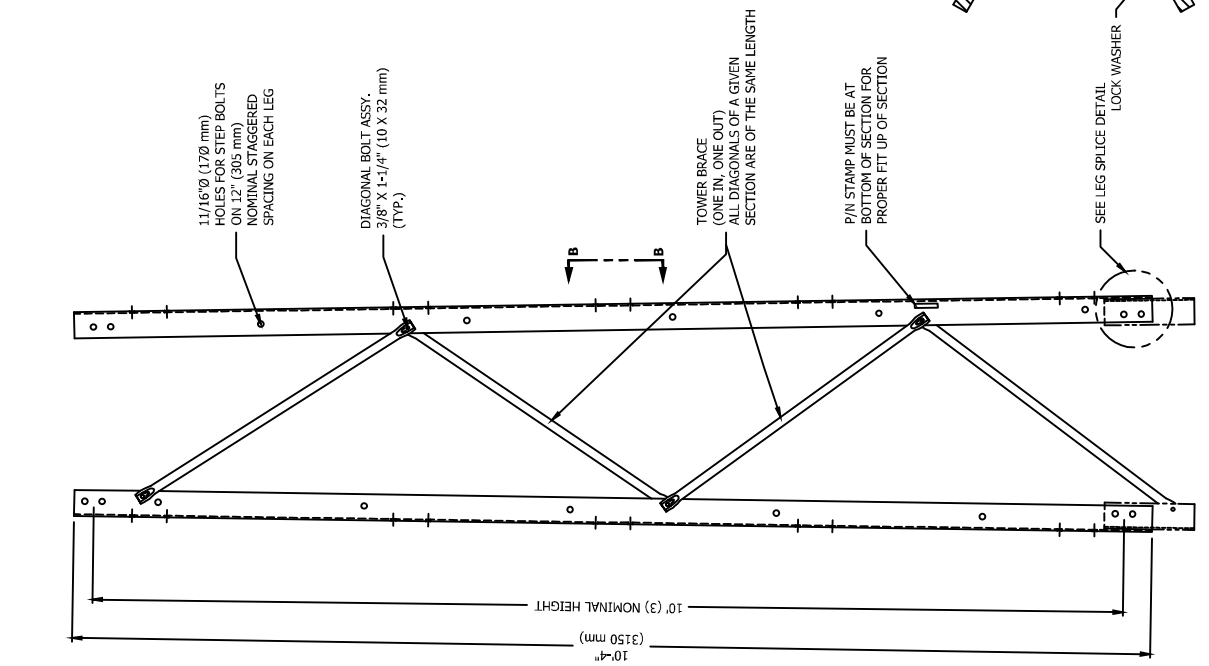

**ELEVATION VIEW**

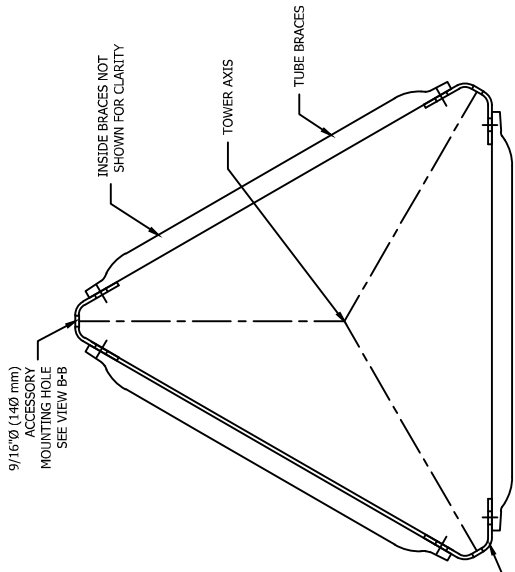

**CROSS SECTION**

REVISIONS			
REV	DESCRIPTION	DWN	CHK APP
3	UPDATED DRAWINGS TO NEW STANDARDS	ZAW	JDM HA
	DATE: 09/19/12		

**SECTION BILL OF MATERIALS**

SECTION	PART NO.	QTY	DESCRIPTION
R6	RSL-6	3	U 2.75"X.19"X10.33' HDG
	RSLD-6	12	BRACE R6 1.00"ODX18GX3.98'
	210005GALW	15	BOLT ASSY 3/8 X 1-1/4 G5
	210030GALW	12	BOLT ASSY 5/8 X 1-3/4 A325
R7	RSL-7	3	U 2.75"X.19"X10.33' HDG
	RSLD-7	12	BRACE R7 1.00"ODX18GX4.17'
	210005GALW	15	BOLT ASSY 3/8 X 1-1/4 G5
	210030GALW	12	BOLT ASSY 5/8 X 1-3/4 A325
R8	RSL-8	3	U 2.75"X.25"X10.33' HDG
	RSLD-8H	12	BRACE R8 1.25"ODX16GA4.36'
	210005GALW	15	BOLT ASSY 3/8 X 1-1/4 G5
	210030GALW	12	BOLT ASSY 5/8 X 1-3/4 A325
R9	RSL-9	3	U 2.75"X.25"X10.33' HDG
	RSLD-9H	12	BRACE R9 1.25"ODX16GA4.55'
	210005GALW	15	BOLT ASSY 3/8 X 1-1/4 G5
	210030GALW	12	BOLT ASSY 5/8 X 1-3/4 A325
R10H	RSL-10	3	U 2.75"X.25"X10.33' HDG
	RSLD-10H	12	BRACE R10 1.25"ODX16GA4.74'
	210005GALW	15	BOLT ASSY 3/8 X 1-1/4 G5
	210030GALW	12	BOLT ASSY 5/8 X 1-3/4 A325

**SECTION BILL OF MATERIALS**

SECTION	PART NO.	QTY	DESCRIPTION
R1	RSL-1	3	U 2.75"X.19"X10.33' HDG
	RSLD-1	12	BRACE R1 1.00"ODX18GX3.15'
	210005GALW	15	BOLT ASSY 3/8 X 1-1/4 G5
	210030GALW	12	BOLT ASSY 5/8 X 1-3/4 A325
R2	RSL-2	3	U 2.75"X.19"X10.33' HDG
	RSLD-2	12	BRACE R2 1.00"ODX18GX3.30'
	210005GALW	15	BOLT ASSY 3/8 X 1-1/4 G5
	210030GALW	12	BOLT ASSY 5/8 X 1-3/4 A325
R3	RSL-3	3	U 2.75"X.19"X10.33' HDG
	RSLD-3	12	BRACE R3 1.00"ODX18GX3.46'
	210005GALW	15	BOLT ASSY 3/8 X 1-1/4 G5
	210030GALW	12	BOLT ASSY 5/8 X 1-3/4 A325
R4	RSL-4	3	U 2.75"X.19"X10.33' HDG
	RSLD-4	12	BRACE R4 1.00"ODX18GX3.62'
	210005GALW	15	BOLT ASSY 3/8 X 1-1/4 G5
	210030GALW	12	BOLT ASSY 5/8 X 1-3/4 A325
R5	RSL-5	3	U 2.75"X.19"X10.33' HDG
	RSLD-5	12	BRACE R5 1.00"ODX18GX3.80'
	210005GALW	15	BOLT ASSY 3/8 X 1-1/4 G5
	210030GALW	12	BOLT ASSY 5/8 X 1-3/4 A325

**NOTE:**  
 1. BOLT ASSY'S IN B.O.M. ABOVE CONSIST OF BOLT, HEAVY HEX NUTS, & SPRING LOCK WASHER.  
 2. ADD SUFFIX A, P, OR T TO SECTION PART NUMBER FOR ANCO, PAL OR TRILLOC NUT LOCKING DEVICE.  
 EXAMPLE: R1-A FOR ANCO  
 3. LEG & BRACE PART NUMBERS ARE STAMPED AS 1.2.3.....10. THIS COINCIDES WITH LEG PART NUMBERS RSL-1,RSL-2,.....RSL-10 AND BRACE PART NUMBER RSLD-1, RSLD-2,.....RSLD-10 NOTED IN BILL OF MATERIALS ABOVE .





PO BOX 5999  
 PEORIA, IL 61601-5999  
 TOLL FREE 800-727-ROHN

THIS DRAWING IS THE PROPERTY OF ROHN. IT IS NOT TO BE REPRODUCED, COPIED OR TRACED IN WHOLE OR IN PART WITHOUT OUR WRITTEN CONSENT.


**RSL TOWER  
 SECTION DETAILS  
 TUBE BRACING**

DWN:	CEJ	CHKD:	JDM	DATE:	05/21/12	
ENGR:	HA	SHEET #:	2 OF 2			
PROJ. ENGR:	OH	PROJ. MANGER:				
DRAWING NO:	RSLT-01-A2				REV:	3

- NOTE:**
1. BOLT ASS'YS IN B.O.M. ABOVE CONSIST OF BOLT & TRI-LOC NUT.
  2. ADD SUFFIX A, P, OR T TO SECTION PART NUMBER FOR ANCO, PAL OR TRI-LOC NUT LOCKING DEVICE.
  3. EXAMPLE: RSLH1A FOR ANCO.
  4. ALL DIMENSIONS IN PARENTHESSES ARE IN METERS, UNLESS OTHERWISE NOTED.

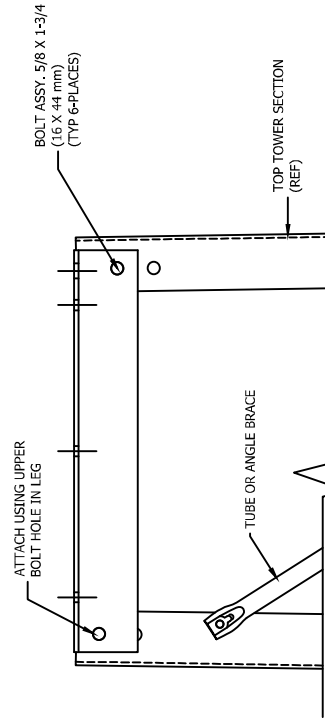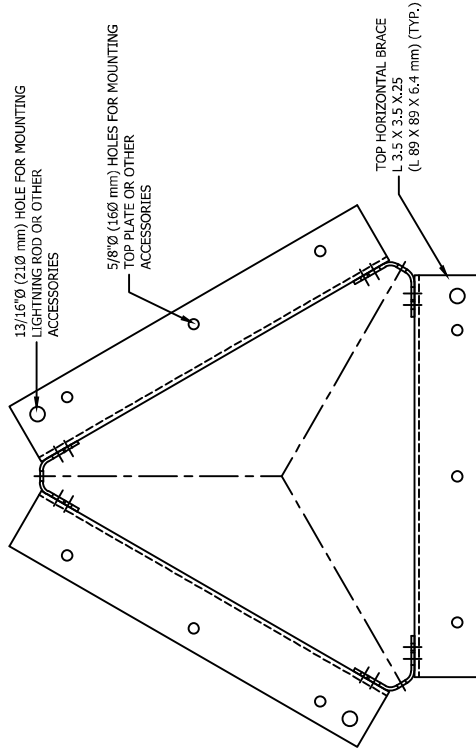

(FOR P/N'S: RSLH1A - RSLH7A)

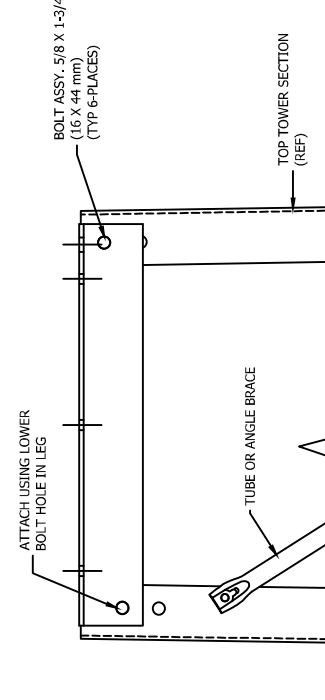

(FOR P/N'S: RSLH8A - RSLH9A)

**TOP HORIZONTAL BRACE KIT BILL OF MATERIAL**

ITEM	P/N	QTY	DESCRIPTION
RSLH1A (FOR NO. 1 RSL TOWER SECTION)	RSLH1 210030GA-TLN	3	BRACE H R1 L3.5X.25X1.83'
RSLH2A (FOR NO. 2 RSL TOWER SECTION)	RSLH2 210030GA-TLN	6	BOLT ASSY 5/8 X 1-3/4" A325
RSLH3A (FOR NO. 3 RSL TOWER SECTION)	RSLH3 210030GA-TLN	3	BRACE H R2 L3.5X.25X2.08'
RSLH4A (FOR NO. 4 RSL TOWER SECTION)	RSLH4 210030GA-TLN	6	BOLT ASSY 5/8 X 1-3/4" A325
RSLH5A (FOR NO. 5 RSL TOWER SECTION)	RSLH5 210030GA-TLN	3	BRACE H R3 L3.5X.25X2.32'
RSLH6A (FOR NO. 6 RSL TOWER SECTION)	RSLH6 210030GA-TLN	6	BOLT ASSY 5/8 X 1-3/4" A325
RSLH7A (FOR NO. 7 RSL TOWER SECTION)	RSLH7 210030GA-TLN	3	BRACE H R4 L3.5X.25X2.57'
RSLH8A (FOR NO. 8 RSL TOWER SECTION)	RSLH8 210030GA-TLN	6	BOLT ASSY 5/8 X 1-3/4" A325
RSLH9A (FOR NO. 9 RSL TOWER SECTION)	RSLH9 210030GA-TLN	3	BRACE H R5 L3.5X.25X2.81'
		6	BOLT ASSY 5/8 X 1-3/4" A325
		3	BRACE H R6 L3.5X.25X3.05'
		6	BOLT ASSY 5/8 X 1-3/4" A325
		3	BRACE H R7 L3.5X.25X3.30'
		6	BOLT ASSY 5/8 X 1-3/4" A325
		3	BRACE H R8 L3.5X.25X3.54'
		6	BOLT ASSY 5/8 X 1-3/4" A325
		3	BRACE H R9 L3.5X.25X3.77'
		6	BOLT ASSY 5/8 X 1-3/4" A325

FILE NO.

REV	DESCRIPTION	DWN	CHK	APP
2	REVISED 3/16" HOLES TO 3/8" HOLES	ZAW	JDM	HA
	DATE: 11/19/12			



PO BOX 5999  
PEORIA, IL 61601-5999  
TOLL FREE 800-772-ROHN

THIS DRAWING IS THE PROPERTY OF ROHN. IT IS NOT TO BE REPRODUCED, COPIED OR TRACED IN WHOLE OR IN PART WITHOUT OUR WRITTEN CONSENT.

**RSL TOWER  
TOP HORIZONTAL BRACE KITS**

DWN:	ZAW	CHK'D:	JDM	DATE:	08/07/12
ENGR:	HA	SHEET #:	1 OF 1	PRI. MGR:	
PRI. ENGR:	OH	DRAWING NO.:	RSLHRZ	REV:	2

FILE NO.	
REVISIONS	
REV.	DESCRIPTION
4	RSB09 BASE SECTION
DRAWN	CHK. APP.
ZAW	JDM
DATE: 10/19/12	HA

REV.	DESCRIPTION
4	RSB09 BASE SECTION
DRAWN	CHK. APP.
ZAW	JDM
DATE: 10/19/12	HA




PO BOX 5999  
PEORIA, IL 61601-5999  
TOLL FREE 800-737-ROHN  
FOR MATERIALS CONSULTANT

THIS DRAWING IS THE PROPERTY OF ROHN. IT IS NOT TO BE REPRODUCED, COPIED OR TRACED IN WHOLE OR IN PART WITHOUT ROHN'S WRITTEN CONSENT.

DRAWN:	CEJ	CHK'D:	JDM	DATE:	05/21/2012
ENGR:	HA	SHEET #:	1 OF 1	PRI. MANGER:	
PRI. ENGR:	OH	DRAWING NO.:	RSL5BK	REV.:	4

RSL TOWER	
SHORT BASE SECTION KITS	
RSB02	LEG BASE U2.74"X.19"X4.58' HDG
RSB03	TOP HORZ L2X2X.19X2.34' HDG
RSB04	D/AG L2X2X.19X3.92' HDG
RSB05	BOT HORZ L2X2X.19X2.44' HDG
RSB06	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB07	LEG BASE U2.74"X.19"X4.58' HDG
RSB08	TOP HORZ L2X2X.19X2.58' HDG
RSB09	D/AG L2X2X.19X4.07' HDG
RSB10	BOT HORZ L2X2X.19X2.69' HDG
RSB11	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB12	LEG BASE U2.74"X.19"X4.58' HDG
RSB13	TOP HORZ L2X2X.19X2.82' HDG
RSB14	D/AG L2X2X.19X4.23' HDG
RSB15	BOT HORZ L2X2X.19X2.93' HDG
RSB16	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB17	LEG BASE U2.74"X.19"X4.58' HDG
RSB18	TOP HORZ L2X2X.19X2.82' HDG
RSB19	D/AG L2X2X.19X4.23' HDG
RSB20	BOT HORZ L2X2X.19X2.93' HDG
RSB21	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB22	LEG BASE U2.74"X.19"X4.58' HDG
RSB23	TOP HORZ L2X2X.19X2.82' HDG
RSB24	D/AG L2X2X.19X4.23' HDG
RSB25	BOT HORZ L2X2X.19X2.93' HDG
RSB26	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB27	LEG BASE U2.74"X.19"X4.58' HDG
RSB28	TOP HORZ L2X2X.19X2.82' HDG
RSB29	D/AG L2X2X.19X4.23' HDG
RSB30	BOT HORZ L2X2X.19X2.93' HDG
RSB31	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB32	LEG BASE U2.74"X.19"X4.58' HDG
RSB33	TOP HORZ L2X2X.19X2.82' HDG
RSB34	D/AG L2X2X.19X4.23' HDG
RSB35	BOT HORZ L2X2X.19X2.93' HDG
RSB36	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB37	LEG BASE U2.74"X.19"X4.58' HDG
RSB38	TOP HORZ L2X2X.19X2.82' HDG
RSB39	D/AG L2X2X.19X4.23' HDG
RSB40	BOT HORZ L2X2X.19X2.93' HDG
RSB41	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB42	LEG BASE U2.74"X.19"X4.58' HDG
RSB43	TOP HORZ L2X2X.19X2.82' HDG
RSB44	D/AG L2X2X.19X4.23' HDG
RSB45	BOT HORZ L2X2X.19X2.93' HDG
RSB46	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB47	LEG BASE U2.74"X.19"X4.58' HDG
RSB48	TOP HORZ L2X2X.19X2.82' HDG
RSB49	D/AG L2X2X.19X4.23' HDG
RSB50	BOT HORZ L2X2X.19X2.93' HDG
RSB51	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB52	LEG BASE U2.74"X.19"X4.58' HDG
RSB53	TOP HORZ L2X2X.19X2.82' HDG
RSB54	D/AG L2X2X.19X4.23' HDG
RSB55	BOT HORZ L2X2X.19X2.93' HDG
RSB56	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB57	LEG BASE U2.74"X.19"X4.58' HDG
RSB58	TOP HORZ L2X2X.19X2.82' HDG
RSB59	D/AG L2X2X.19X4.23' HDG
RSB60	BOT HORZ L2X2X.19X2.93' HDG
RSB61	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB62	LEG BASE U2.74"X.19"X4.58' HDG
RSB63	TOP HORZ L2X2X.19X2.82' HDG
RSB64	D/AG L2X2X.19X4.23' HDG
RSB65	BOT HORZ L2X2X.19X2.93' HDG
RSB66	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB67	LEG BASE U2.74"X.19"X4.58' HDG
RSB68	TOP HORZ L2X2X.19X2.82' HDG
RSB69	D/AG L2X2X.19X4.23' HDG
RSB70	BOT HORZ L2X2X.19X2.93' HDG
RSB71	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB72	LEG BASE U2.74"X.19"X4.58' HDG
RSB73	TOP HORZ L2X2X.19X2.82' HDG
RSB74	D/AG L2X2X.19X4.23' HDG
RSB75	BOT HORZ L2X2X.19X2.93' HDG
RSB76	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB77	LEG BASE U2.74"X.19"X4.58' HDG
RSB78	TOP HORZ L2X2X.19X2.82' HDG
RSB79	D/AG L2X2X.19X4.23' HDG
RSB80	BOT HORZ L2X2X.19X2.93' HDG
RSB81	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB82	LEG BASE U2.74"X.19"X4.58' HDG
RSB83	TOP HORZ L2X2X.19X2.82' HDG
RSB84	D/AG L2X2X.19X4.23' HDG
RSB85	BOT HORZ L2X2X.19X2.93' HDG
RSB86	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB87	LEG BASE U2.74"X.19"X4.58' HDG
RSB88	TOP HORZ L2X2X.19X2.82' HDG
RSB89	D/AG L2X2X.19X4.23' HDG
RSB90	BOT HORZ L2X2X.19X2.93' HDG
RSB91	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB92	LEG BASE U2.74"X.19"X4.58' HDG
RSB93	TOP HORZ L2X2X.19X2.82' HDG
RSB94	D/AG L2X2X.19X4.23' HDG
RSB95	BOT HORZ L2X2X.19X2.93' HDG
RSB96	BOLT ASSY 5/8 X 1-3/4 HSB A325
RSB97	LEG BASE U2.74"X.19"X4.58' HDG
RSB98	TOP HORZ L2X2X.19X2.82' HDG
RSB99	D/AG L2X2X.19X4.23' HDG
RSB00	BOT HORZ L2X2X.19X2.93' HDG
RSB01	BOLT ASSY 5/8 X 1-3/4 HSB A325

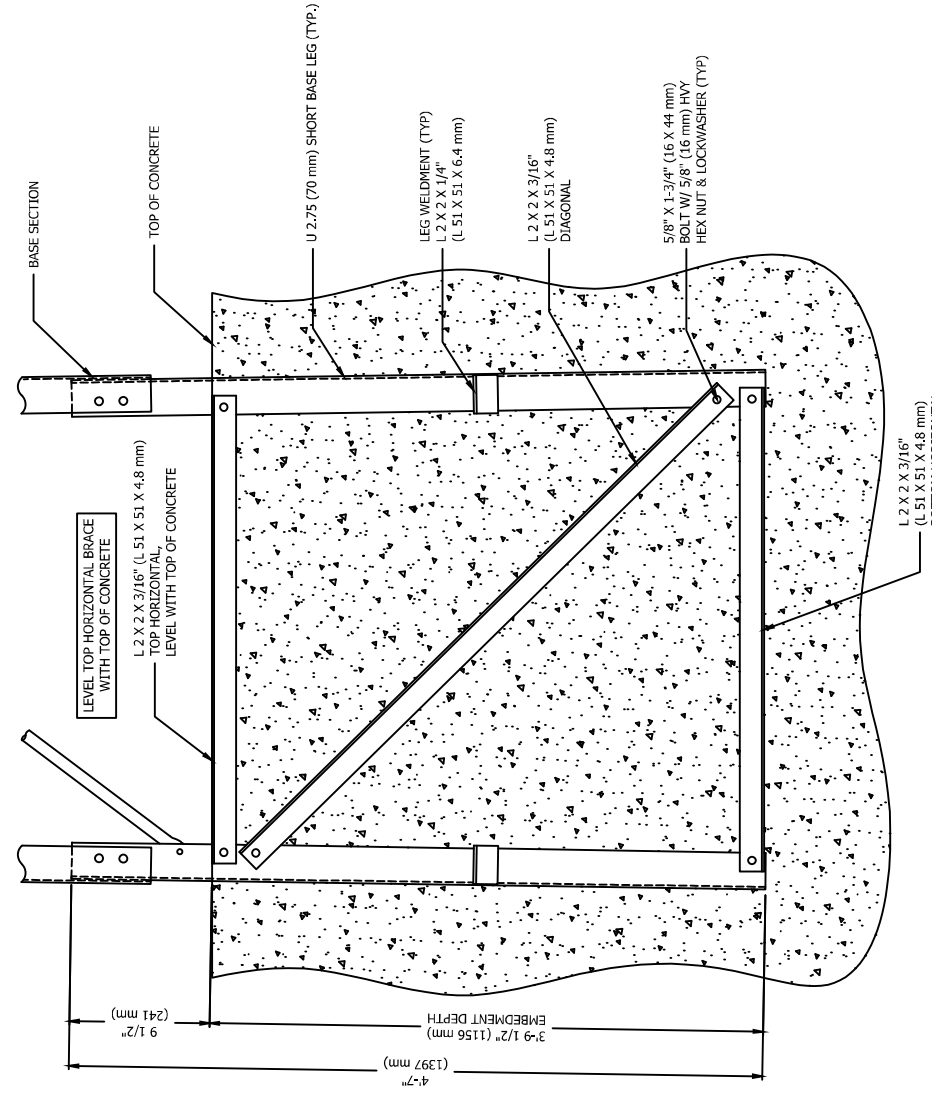

**TOWER SHORT BASE FOUNDATION KIT DETAILS**

- NOTES:**
1. ALL REINFORCING BARS NOT SHOWN FOR CLARITY.
  2. BOLT ASSYS IN B.O.M. CONSIST OF BOLT, SPRING LOCK WASHER, & NUT.
  3. NOMINAL METRIC EQUIVALENTS ARE GIVEN FOR REFERENCE ONLY AND SHALL NOT BE SUBSTITUTED FOR THE DESCRIBED SIZES UNLESS OTHERWISE APPROVED BY ROHN PRODUCTS.
  4. ALL DIMENSIONS IN PARENTHESES ARE IN METERS, UNLESS OTHERWISE NOTED.



FILE NO.	RSL-TOWER
REVISIONS	
REV.	DESCRIPTION
4	ANCHOR BOLT POSITIONING
NOTE	CEI
DATE	09/18/14

DESCRIPTION	QTY.	A	B	C	DESCRIPTION
TOWER TEMPLATE KIT R2	1	2'-3 9/16" (0.700)	1'-11 7/8" (0.606)	1'-3 15/16" (0.405)	TOWER TEMPLATE KIT R2
LEG STUB R2-6 HDG	3				LEG STUB R2-6 HDG
TEMPLATE .25X7.00"OD BLK	3				TEMPLATE .25X7.00"OD BLK
ANCHOR BOLT 3/4X48 F1554-S5	9				ANCHOR BOLT 3/4X48 F1554-S5
TOWER TEMPLATE KIT R3	1	2'-6 1/2" (0.775)	2'-2 3/8" (0.670)	1'-5 5/8" (0.448)	TOWER TEMPLATE KIT R3
LEG STUB R2-6 HDG	3				LEG STUB R2-6 HDG
TEMPLATE .25X7.00"OD BLK	3				TEMPLATE .25X7.00"OD BLK
ANCHOR BOLT 3/4X48 F1554-S5	9				ANCHOR BOLT 3/4X48 F1554-S5
TOWER TEMPLATE KIT R4	1	2'-9 3/8" (0.848)	2'-4 15/16" (0.735)	1'-7 5/16" (0.491)	TOWER TEMPLATE KIT R4
LEG STUB R2-6 HDG	3				LEG STUB R2-6 HDG
TEMPLATE .25X7.00"OD BLK	3				TEMPLATE .25X7.00"OD BLK
ANCHOR BOLT 3/4X48 F1554-S5	9				ANCHOR BOLT 3/4X48 F1554-S5
TOWER TEMPLATE KIT R5	1	3'-0 5/16" (0.922)	2'-7 7/16" (0.799)	1'-9" (0.533)	TOWER TEMPLATE KIT R5
LEG STUB R2-6 HDG	3				LEG STUB R2-6 HDG
TEMPLATE .25X7.00"OD BLK	3				TEMPLATE .25X7.00"OD BLK
ANCHOR BOLT 3/4X48 F1554-S5	9				ANCHOR BOLT 3/4X48 F1554-S5
TOWER TEMPLATE KIT R6	1	3'-3 1/4" (0.997)	2'-10" (0.864)	1'-10 11/16" (0.576)	TOWER TEMPLATE KIT R6
LEG STUB R2-6 HDG	3				LEG STUB R2-6 HDG
TEMPLATE .25X7.00"OD BLK	3				TEMPLATE .25X7.00"OD BLK
ANCHOR BOLT 3/4X48 F1554-S5	9				ANCHOR BOLT 3/4X48 F1554-S5
TOWER TEMPLATE KIT R7	1	3'-6" (1.067)	3'-0 3/8" (0.924)	2'-0 1/4" (0.616)	TOWER TEMPLATE KIT R7
LEG STUB R7-10 HDG	3				LEG STUB R7-10 HDG
TEMPLATE .25X7.00"OD BLK	3				TEMPLATE .25X7.00"OD BLK
ANCHOR BOLT 3/4X48 F1554-S5	9				ANCHOR BOLT 3/4X48 F1554-S5
TOWER TEMPLATE KIT R8H	1	3'-8 11/16" (1.135)	3'-2 11/16" (0.983)	2'-1 13/16" (0.656)	TOWER TEMPLATE KIT R8H
LEG STUB R7-10 HDG	3				LEG STUB R7-10 HDG
TEMPLATE .25X7.00"OD BLK	3				TEMPLATE .25X7.00"OD BLK
ANCHOR BOLT 3/4X48 F1554-S5	9				ANCHOR BOLT 3/4X48 F1554-S5
TOWER TEMPLATE KIT R9H	1	3'-11 3/8" (1.203)	3'-5 1/16" (1.043)	2'-3 3/8" (0.695)	TOWER TEMPLATE KIT R9H
LEG STUB R7-10 HDG	3				LEG STUB R7-10 HDG
TEMPLATE .25X7.00"OD BLK	3				TEMPLATE .25X7.00"OD BLK
ANCHOR BOLT 3/4X48 F1554-S5	9				ANCHOR BOLT 3/4X48 F1554-S5
TOWER TEMPLATE KIT R10H	1	4'-2 1/8" (1.273)	3'-7 3/8" (1.102)	2'-4 15/16" (0.735)	TOWER TEMPLATE KIT R10H
LEG STUB R7-10 HDG	3				LEG STUB R7-10 HDG
TEMPLATE .25X7.00"OD BLK	3				TEMPLATE .25X7.00"OD BLK
ANCHOR BOLT 3/4X48 F1554-S5	9				ANCHOR BOLT 3/4X48 F1554-S5

ROHN PRODUCTS	PO BOX 5999	DATE: 06/14/2012
PEORIA, IL 61601-5999	TOLL FREE 800-727-ROHN	CHKD: JDM
THIS DRAWING IS THE PROPERTY OF ROHN. IT IS NOT TO BE REPRODUCED, COPIED OR TRACED IN WHOLE OR IN PART WITHOUT OUR WRITTEN CONSENT.		DATE: 06/14/2012
		SHEET #:
		1 OF 1
		PROJ. MGR:
		OH
		DRAWING NO:
		RSLJBL
		REV:
		4

KIT NO.	PART NO.	QTY.	A	B	C	DESCRIPTION
RAL02 (FOR NO. 2 RSL TOWER SECTION)	RSL2-TEWK	1				TOWER TEMPLATE KIT R2
	RSL2-6W	3	2'-3 9/16" (0.700)	1'-11 7/8" (0.606)	1'-3 15/16" (0.405)	LEG STUB R2-6 HDG
	RSL-BOT	3				TEMPLATE .25X7.00"OD BLK
	260093G	9				ANCHOR BOLT 3/4X48 F1554-S5
RAL03 (FOR NO. 3 RSL TOWER SECTION)	RSL3-TEWK	1	2'-6 1/2" (0.775)	2'-2 3/8" (0.670)	1'-5 5/8" (0.448)	TOWER TEMPLATE KIT R3
	RSL2-6W	3	2'-6 1/2" (0.775)	2'-2 3/8" (0.670)	1'-5 5/8" (0.448)	LEG STUB R2-6 HDG
	RSL-BOT	3				TEMPLATE .25X7.00"OD BLK
	260093G	9				ANCHOR BOLT 3/4X48 F1554-S5
RAL04 (FOR NO. 4 RSL TOWER SECTION)	RSL4-TEWK	1	2'-9 3/8" (0.848)	2'-4 15/16" (0.735)	1'-7 5/16" (0.491)	TOWER TEMPLATE KIT R4
	RSL2-6W	3	2'-9 3/8" (0.848)	2'-4 15/16" (0.735)	1'-7 5/16" (0.491)	LEG STUB R2-6 HDG
	RSL-BOT	3				TEMPLATE .25X7.00"OD BLK
	260093G	9				ANCHOR BOLT 3/4X48 F1554-S5
RAL05 (FOR NO. 5 RSL TOWER SECTION)	RSL5-TEWK	1	3'-0 5/16" (0.922)	2'-7 7/16" (0.799)	1'-9" (0.533)	TOWER TEMPLATE KIT R5
	RSL2-6W	3	3'-0 5/16" (0.922)	2'-7 7/16" (0.799)	1'-9" (0.533)	LEG STUB R2-6 HDG
	RSL-BOT	3				TEMPLATE .25X7.00"OD BLK
	260093G	9				ANCHOR BOLT 3/4X48 F1554-S5
RAL06 (FOR NO. 6 RSL TOWER SECTION)	RSL6-TEWK	1	3'-3 1/4" (0.997)	2'-10" (0.864)	1'-10 11/16" (0.576)	TOWER TEMPLATE KIT R6
	RSL2-6W	3	3'-3 1/4" (0.997)	2'-10" (0.864)	1'-10 11/16" (0.576)	LEG STUB R2-6 HDG
	RSL-BOT	3				TEMPLATE .25X7.00"OD BLK
	260093G	9				ANCHOR BOLT 3/4X48 F1554-S5
RAL07 (FOR NO. 7 RSL TOWER SECTION)	RSL7-TEWK	1	3'-6" (1.067)	3'-0 3/8" (0.924)	2'-0 1/4" (0.616)	TOWER TEMPLATE KIT R7
	RSL7-10W	3	3'-6" (1.067)	3'-0 3/8" (0.924)	2'-0 1/4" (0.616)	LEG STUB R7-10 HDG
	RSL-BOT	3				TEMPLATE .25X7.00"OD BLK
	260093G	9				ANCHOR BOLT 3/4X48 F1554-S5
RAL08 (FOR NO. 8 RSL TOWER SECTION)	RSL8-TEWK	1	3'-8 11/16" (1.135)	3'-2 11/16" (0.983)	2'-1 13/16" (0.656)	TOWER TEMPLATE KIT R8H
	RSL7-10W	3	3'-8 11/16" (1.135)	3'-2 11/16" (0.983)	2'-1 13/16" (0.656)	LEG STUB R7-10 HDG
	RSL-BOT	3				TEMPLATE .25X7.00"OD BLK
	260093G	9				ANCHOR BOLT 3/4X48 F1554-S5
RAL09 (FOR NO. 9 RSL TOWER SECTION)	RSL9-TEWK	1	3'-11 3/8" (1.203)	3'-5 1/16" (1.043)	2'-3 3/8" (0.695)	TOWER TEMPLATE KIT R9H
	RSL7-10W	3	3'-11 3/8" (1.203)	3'-5 1/16" (1.043)	2'-3 3/8" (0.695)	LEG STUB R7-10 HDG
	RSL-BOT	3				TEMPLATE .25X7.00"OD BLK
	260093G	9				ANCHOR BOLT 3/4X48 F1554-S5
RAL10 (FOR NO. 10 RSL TOWER SECTION)	RSL10-TEWK	1	4'-2 1/8" (1.273)	3'-7 3/8" (1.102)	2'-4 15/16" (0.735)	TOWER TEMPLATE KIT R10H
	RSL7-10W	3	4'-2 1/8" (1.273)	3'-7 3/8" (1.102)	2'-4 15/16" (0.735)	LEG STUB R7-10 HDG
	RSL-BOT	3				TEMPLATE .25X7.00"OD BLK
	260093G	9				ANCHOR BOLT 3/4X48 F1554-S5

- NOTES**
- ALL ANCHOR BOLTS MUST MEET OR EXCEED REQUIREMENTS OF A.S.T.M. F1554-S2, S5 GRADE. SPECIAL CARE MUST BE TAKEN WHEN LIFTING ANCHOR BOLT CLUSTER, IN ORDER TO PREVENT ANCHOR BOLT TEMPLATE DISTORTION.
  - ANCHOR BOLT ASSEMBLY MUST BE ADEQUATELY SUPPORTED AND RESTRAINED TO PREVENT MOVEMENT OF THE CLUSTER DURING CONCRETE INSTALLATION. IT IS THE RESPONSIBILITY OF THE FOUNDATION CONTRACTOR TO VERIFY THAT THE CORRECT ANCHOR BOLT TEMPLATE AND FOUNDATION ARE BEING USED.
  - IT IS THE RESPONSIBILITY OF THE FOUNDATION DESIGN ENGINEER TO INSURE THAT THE ANCHORAGES PROVIDED ARE COMPATIBLE WITH THE PROPOSED FOUNDATION DESIGN AND THAT THE CAPACITIES OF THE ANCHORAGES ARE NOT LIMITED BY THE STRENGTH OF THE FOUNDATION.
  - AFTER ANCHOR BOLTS ARE INSTALLED AND CONCRETE HAS TAKEN ITS INITIAL SET, ANCHOR BOLTS MUST NOT BE MOVED, BENT OR REALIGNED IN ANY MANNER. A NUT LOCKING DEVICE MUST BE INSTALLED ON ALL ANCHOR BOLTS.
  - ALL DIMENSIONS IN PARENTHESES ARE IN METERS, UNLESS OTHERWISE NOTED.
  - NOMINAL METRIC EQUIVALENTS ARE GIVEN FOR REFERENCE ONLY AND SHALL NOT BE SUBSTITUTED FOR THE DESCRIBED SIZE UNLESS OTHERWISE APPROVED BY ROHN PRODUCTS.
  - ANCHOR BOLT NUTS SHALL BE ROTATED 1/3 TURN FROM SNUG TIGHT CONDITION WITH BOTTOM LEVELING NUT HELD IN PLACE.

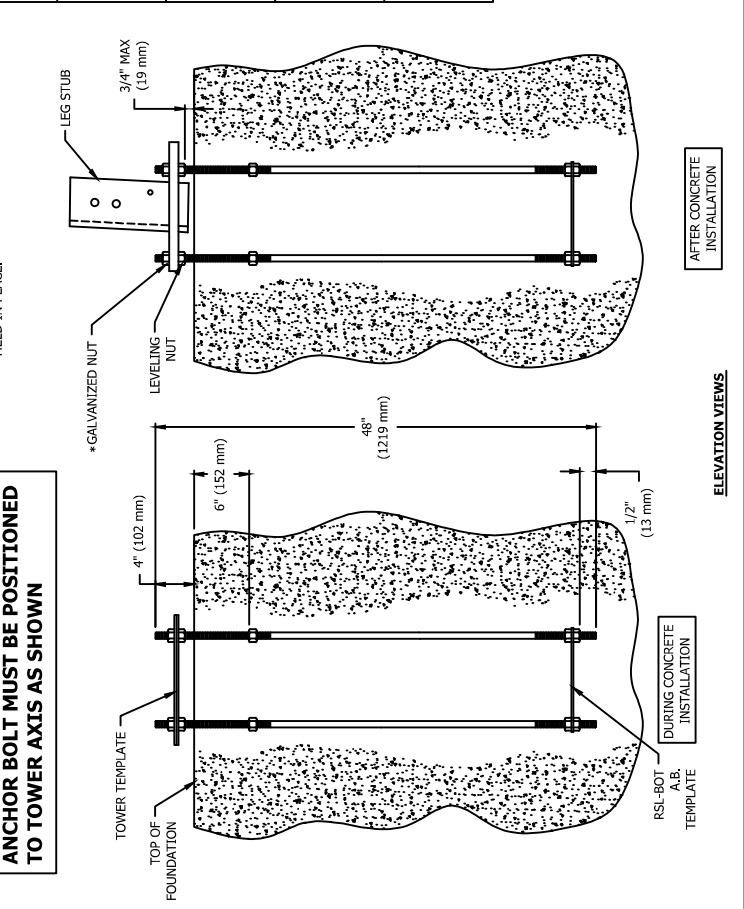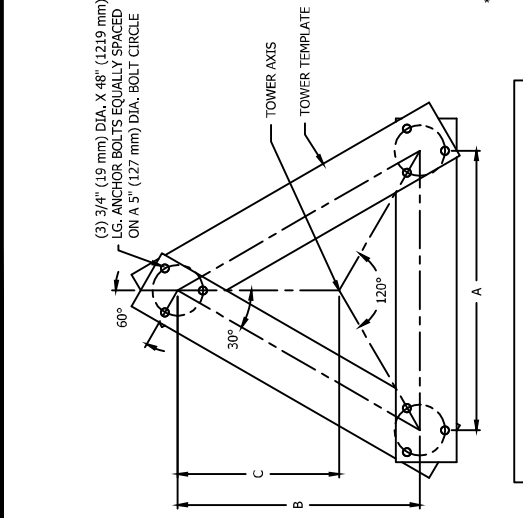

**ELEVATION VIEWS**

DURING CONCRETE INSTALLATION



AFTER CONCRETE INSTALLATION

FILE NO. RSL TOWER

REVISIONS		DWN	CHK	APP
REV	DESCRIPTION			
3	ADDED 4x4"	JHY	JDM	HA
	DATE: 06/04/2015			

BASE SECTION REFERENCE	NOMINAL FACE WIDTH	FOUNDATION DIMENSIONS			CONCRETE	TOTAL #7 [#22] BARS
		A	B	C		
2	2'-3" [0.70 m]	7'-6" [2.29 m]	3'-9" [1.14 m]	2'-4" [0.71 m]	9.0 yd <sup>3</sup> [6.9 m <sup>3</sup> ]	32
3	2'-6" [0.78 m]	7'-9" [2.36 m]	3'-10 1/2" [1.18 m]	2'-4" [0.71 m]	9.6 yd <sup>3</sup> [7.3 m <sup>3</sup> ]	40
4	2'-9" [0.85 m]	8'-0" [2.44 m]	4'-0" [1.22 m]	2'-4" [0.71 m]	10.3 yd <sup>3</sup> [7.9 m <sup>3</sup> ]	40
5	3'-0" [0.93 m]	8'-3" [2.51 m]	4'-1 1/2" [1.26 m]	2'-4" [0.71 m]	10.9 yd <sup>3</sup> [8.3 m <sup>3</sup> ]	40
6	3'-3" [1.00 m]	8'-6" [2.59 m]	4'-3" [1.30 m]	2'-3" [0.69 m]	11.6 yd <sup>3</sup> [8.9 m <sup>3</sup> ]	40
7	3'-6" [1.08 m]	8'-6" [2.59 m]	4'-3" [1.30 m]	2'-2" [0.66 m]	11.6 yd <sup>3</sup> [8.9 m <sup>3</sup> ]	40
8	3'-9" [1.15 m]	9'-6" [2.90 m]	4'-9" [1.45 m]	2'-6" [0.76 m]	14.5 yd <sup>3</sup> [11.1 m <sup>3</sup> ]	40
9	4'-0" [1.23 m]	9'-9" [2.97 m]	4'-10 1/2" [1.49 m]	2'-6" [0.76 m]	15.3 yd <sup>3</sup> [11.7 m <sup>3</sup> ]	48
10	4'-3" [1.30 m]	10'-0" [3.05 m]	5'-0" [1.52 m]	2'-6" [0.76 m]	16.0 yd <sup>3</sup> [12.2 m <sup>3</sup> ]	48

NOTE: SEE DRAWING NO. B905048 FOR STANDARD FOUNDATION NOTES.

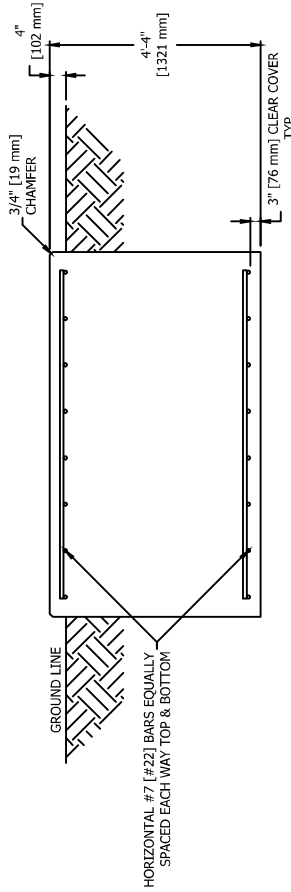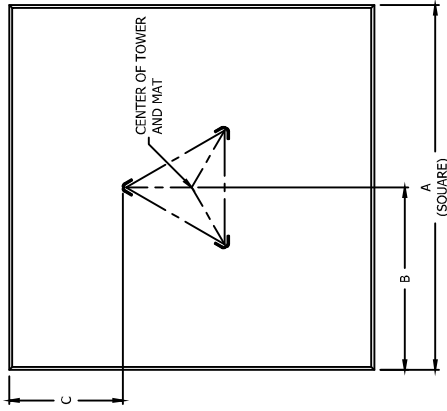

PO BOX 5999  
PEORIA, IL 61601-5999  
TOLL FREE 800-727-ROHN

THIS DRAWING IS THE PROPERTY OF ROHN. IT IS NOT TO BE REPRODUCED, COPIED OR TRACED IN WHOLE OR IN PART WITHOUT OUR WRITTEN CONSENT.

RSL TOWER  
STANDARD MAT FOUNDATION DETAILS

DWN: ZAW  
CHKD: SSM  
DATE: 7/11/12

ENGR: HA  
SHEET #: 1 OF 1

PROJ. ENGR: OH  
PROJ. MGR: OH

DRAWING NO: RSL-01-F1  
REV: 3

**STANDARD FOUNDATION NOTES**  
**ANSI/TIA-222-G**

- STANDARD FOUNDATION DESIGNS ARE IN ACCORDANCE WITH ANSI/TIA-222-G, "STRUCTURAL STANDARDS FOR STEEL ANTENNA TOWERS AND ANTENNA SUPPORTING STRUCTURES", SECTION 9 AND ANNEX F FOR THE FOLLOWING PRESUMPTIVE CLAY SOIL PARAMETERS:

N (lb/ft <sup>2</sup> ) [kN/m <sup>2</sup> ]	φ (deg)	Y (lb/ft <sup>3</sup> ) [kN/m <sup>3</sup> ]	C (psf) [kPa]	Ultimate Bearing (psf) [kPa]		Ultimate Skin Friction (psf) [kPa]	k (pci) [kN/m <sup>3</sup> ]	ε <sub>90</sub>
				Shallow Frds.	Deep Frds.			
8 [26]	0	110 [17]	1000 [48]	5000 [240]	9000 [431]	500 [24]	150 [41,000]	0.01

- THE PURCHASER MUST VERIFY THAT ACTUAL SITE SOIL PARAMETERS MEET OR EXCEED ANSI/TIA-222-G PRESUMPTIVE CLAY SOIL DESIGN PARAMETERS AND THAT THE PENETRATION AND/OR ZONE OF SEASONAL MOISTURE VARIATION AT THE SITE. FOUNDATION DESIGN MODIFICATIONS MAY BE REQUIRED IN THE EVENT PRESUMPTIVE CLAY SOIL PARAMETERS ARE NOT APPLICABLE FOR THE ACTUAL SUBSURFACE CONDITIONS ENCOUNTERED.
- A SITE-SPECIFIC INVESTIGATION IS REQUIRED FOR CLASS III STRUCTURES IN ACCORDANCE WITH ANSI/TIA-222-G.
- FOUNDATION DESIGNS ASSUME FIELD INSPECTIONS WILL BE PERFORMED BY THE PURCHASER'S REPRESENTATIVE TO VERIFY THAT CONSTRUCTION MATERIALS, INSTALLATION METHODS AND ASSUMED DESIGN PARAMETERS ARE ACCEPTABLE BASED ON THE CONDITIONS EXISTING AT THE SITE.
- WORK SHALL BE IN ACCORDANCE WITH LOCAL CODES, SAFETY REGULATIONS AND UNLESS OTHERWISE NOTED, THE LATEST REVISION OF ACI 318, "BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE". PROCEDURES FOR THE PROTECTION OF EXCAVATIONS, EXISTING CONSTRUCTION AND UTILITIES SHALL BE ESTABLISHED PRIOR TO FOUNDATION INSTALLATION. CONCRETE MATERIALS SHALL CONFORM TO THE APPROPRIATE STATE REQUIREMENTS FOR EXPOSED STRUCTURAL CONCRETE.
- PROPORTIONS OF CONCRETE MATERIALS SHALL BE SUITABLE FOR THE INSTALLATION METHOD UTILIZED AND SHALL RESULT IN DURABLE CONCRETE FOR RESISTANCE TO LOCAL ANTICIPATED AGGRESSIVE ACTIONS. THE DURABILITY REQUIREMENT OF ACI 318 CHAPTER 4 SHALL BE SATISFIED BASED ON THE CONDITIONS EXPECTED AT THE SITE. AS A MINIMUM, CONCRETE SHALL DEVELOP A MINIMUM COMPRESSIVE STRENGTH OF 4500 PSI (31.0 MPa) IN 28 DAYS.
- MAXIMUM SIZE OF AGGREGATE SHALL NOT EXCEED SIZE SUITABLE FOR INSTALLATION METHOD UTILIZED OR 1/3 CLEAR DISTANCE BEHIND OR BETWEEN REINFORCING. MAXIMUM SIZE MAY BE INCREASED TO 2/3 CLEAR DISTANCE PROVIDED WORKABILITY AND METHODS OF CONSOLIDATION SUCH AS VIBRATING WILL PREVENT HONEYCOMBS OR VOIDS.
- REINFORCEMENT SHALL BE DEFORMED AND CONFORM TO THE REQUIREMENTS OF ASTM A615 GRADE 60 UNLESS OTHERWISE NOTED. SPLICES IN REINFORCEMENT SHALL NOT BE ALLOWED UNLESS OTHERWISE INDICATED.
- REINFORCING CAGES SHALL BE BRACED TO RETAIN PROPER DIMENSIONS DURING HANDLING, THROUGHOUT PLACEMENT OF CONCRETE AND DURING EXTRACTION OF TEMPORARY CASING. WELDING IS PROHIBITED ON REINFORCING STEEL AND EMBEDMENTS.

- MINIMUM CONCRETE COVER FOR REINFORCEMENT SHALL BE 3 INCHES (76 mm) UNLESS OTHERWISE NOTED. APPROVED SPACERS SHALL BE USED TO INSURE A 3 INCH (76 mm) MINIMUM COVER ON REINFORCEMENT. CONCRETE COVER FROM TOP OF FOUNDATION TO ENDS OF VERTICAL REINFORCEMENT SHALL NOT EXCEED 3 INCHES (76 mm) NOR BE LESS THAN 2 INCHES (51 mm).
- SPACERS SHALL BE ATTACHED INTERMITTENTLY THROUGHOUT THE ENTIRE LENGTH OF VERTICAL REINFORCING CAGES TO INSURE CONCENTRIC PLACEMENT OF CAGES IN EXCAVATIONS.
- FOUNDATION DESIGNS ASSUME STRUCTURAL BACKFILL TO BE COMPACTED IN 8 INCH (200 mm) MAXIMUM LAYERS TO 95% OF MAXIMUM DRY DENSITY AT OPTIMUM MOISTURE CONTENT IN ACCORDANCE WITH ASTM D698. ADDITIONALLY, STRUCTURAL BACKFILL MUST HAVE A MINIMUM COMPACTED UNIT WEIGHT OF 100 POUNDS PER CUBIC FOOT (16 kN/m<sup>3</sup>).
- FOUNDATION DESIGNS ASSUME LEVEL GRADE AT THE SITE.
- FOUNDATION INSTALLATION SHALL BE SUPERVISED BY PERSONNEL KNOWLEDGEABLE AND EXPERIENCED WITH THE PROPOSED FOUNDATION TYPE. CONSTRUCTION SHALL BE IN ACCORDANCE WITH GENERALLY ACCEPTED INSTALLATION PRACTICES.
- FOR FOUNDATION AND ANCHOR TOLERANCES SEE DRAWING A810214.
- LOOSE MATERIAL SHALL BE REMOVED FROM BOTTOM OF EXCAVATION PRIOR TO CONCRETE PLACEMENT. SIDES OF EXCAVATION SHALL BE ROUGH AND FREE OF LOOSE CUTTINGS.
- CONCRETE SHALL BE PLACED IN A MANNER THAT WILL PREVENT SEGREGATION OF CONCRETE MATERIALS, INFILTRATION OF WATER OR SOIL AND OTHER OCCURRENCES WHICH MAY DECREASE THE STRENGTH OR DURABILITY OF THE FOUNDATION.
- FREE FALL CONCRETE MAY BE USED PROVIDED FALL IS VERTICAL DOWN WITHOUT HITTING SIDES OF EXCAVATION, FORMWORK, REINFORCING BARS, FORM TIES, CAGE BRACING OR OTHER OBSTRUCTIONS. UNDER NO CIRCUMSTANCES SHALL CONCRETE FALL THROUGH WATER.
- CONCRETE SHALL BE PLACED AGAINST UNDISTURBED SOIL EXCEPT FOR PIERS OR PAD FOUNDATIONS. FORMS FOR PIERS SHALL BE REMOVED PRIOR TO PLACING STRUCTURAL BACKFILL.
- CONSTRUCTION JOINTS, IF REQUIRED IN PIER MUST BE AT LEAST 12 INCHES (305 mm) BELOW BOTTOM OF EMBEDMENTS AND MUST BE INTENTIONALLY ROUGHENED TO A FULL AMPLITUDE OF 1/4 INCH (6 mm). FOUNDATION DESIGN ASSUMES NO OTHER CONSTRUCTION JOINTS.
- CASING, IF USED, SHALL NOT BE LEFT IN PLACE. EQUIPMENT, PROCEDURES, AND PROPORTIONS OF CONCRETE MATERIALS SHALL INSURE CONCRETE WILL NOT BE ADVERSELY DISTURBED UPON CASING REMOVAL. DRILLING FLUID, IF USED, SHALL BE FULLY DISPLACED BY CONCRETE AND SHALL NOT BE DETRIMENTAL TO CONCRETE OR SURROUNDING SOIL. CONTAMINATED CONCRETE SHALL BE REMOVED FROM TOP OF FOUNDATION AND REPLACED WITH FRESH CONCRETE.
- TOP OF FOUNDATION SHALL BE SLOPED TO DRAIN WITH A FLOATED FINISHED. EXPOSED EDGES OF CONCRETE SHALL BE CHAMFERED 3/4" X 3/4" (19 mm X 19 mm) MINIMUM.
- FOR ANCHOR BLOCK TYPE FOUNDATIONS, FOR GUYED TOWERS, ADDITIONAL CORROSION PROTECTION MAY BE REQUIRED FOR STEEL GUY ANCHORS IN DIRECT CONTACT WITH SOIL. DESIGN ASSUMES PERIODIC INSPECTIONS WILL BE PERFORMED OVER THE LIFE OF THE STRUCTURE TO DETERMINE IF ADDITIONAL ANCHOR CORROSION PROTECTION MEASURES MUST BE IMPLEMENTED BASED ON OBSERVED SITE-SPECIFIC CONDITIONS.

FILE NO.

REVISIONS			
REV	DESCRIPTION	DWN	CHK APP
2	REVISED NOTED TO 4500 PSI	JAY	HA HA
	DATE: 2/10/2014		



PO BOX 5999  
PEORIA, IL 61601-5999  
TOLL FREE 800-727-ROHN

THIS DRAWING IS THE PROPERTY OF RAIN. IT IS NOT TO BE REPRODUCED, COPIED OR TRACED IN WHOLE OR IN PART WITHOUT OUR WRITTEN CONSENT.

**ANSI/TIA-222-G**  
**STANDARD FOUNDATION NOTES**

DWN:	FAD	CHKD:	HA	DATE:	Nov/20/2009
ENGR:	HA	SHEET #:	1	OF 1	
PCL ENGR:		PCL MANGER:			
DRAWING NO:	B090548				REV:
					2



## FOUNDATION AND ANCHOR TOLERANCES

### ALL FOUNDATIONS

1. CONCRETE DIMENSIONS: PLUS OR MINUS 1" (25mm)
2. DEPTH OF FOUNDATION: PLUS 3" (76mm) OR MINUS 0"
3. DRILLED FOUNDATIONS OUT OF PLUMB: 1.0°
4. REINFORCING STEEL PLACEMENT: PER A.C.I. 301
5. PROJECTION OF EMBEDMENTS: PLUS OR MINUS 1/8" (3mm)
6. VERTICAL EMBEDMENTS OUT OF PLUMB: 0.5°

### ANCHOR BOLTS

7. MAXIMUM DISTANCE FROM CENTERLINE OF ANCHOR BOLTS TO CENTERLINE OF FOUNDATION: 1/24 OF PIER DIAMETER UP TO A MAXIMUM OF 2" (51mm)
8. ANCHOR BOLT SPACING: 1/16" (2mm)
9. ANCHOR BOLT CIRCLE ORIENTATION: 0.25°
10. ANCHOR BOLT CIRCLE DIAMETER: PLUS OR MINUS 1/16" (2mm)

### SELF-SUPPORTING TOWERS

11. FACE SPREAD DIMENSION CENTER TO CENTER OF ANCHOR BOLT CIRCLES: PLUS OR MINUS 1/16" (2mm) OR 1/16" (2mm) PER 20 FT. (6m) OF FACE SPREAD
12. MAXIMUM DIFFERENCE BETWEEN ANY TWO FOUNDATION ELEVATIONS: 1/2" (13mm)

### GUYED TOWERS

13. GUY RADIUS: PLUS OR MINUS 5% OF DISTANCE SPECIFIED
14. ANCHOR ELEVATION: PLUS OR MINUS 5% OF GUY RADIUS
15. ANCHOR ALIGNMENT (PERPENDICULAR TO GUY RADIUS): 1.0°
16. ANCHOR ROD SLOPE: PLUS OR MINUS 1.0°
17. ANCHOR ROD ALIGNMENT WITH GUY RADIUS: PLUS OR MINUS 1.0°
18. ANCHOR HEAD OUT OF PLUMB: 1.0°
19. GUY INITIAL TENSION: PLUS OR MINUS 10% OF TENSION SPECIFIED

NOTE: TOLERANCES IN NOTES 13 AND 14 CAN NOT OCCUR SIMULTANEOUSLY.

### WARNING!!!

AFTER ANCHOR BOLTS ARE INSTALLED IN CONCRETE HAS TAKEN ITS INITIAL SET, ANCHOR BOLTS MUST NOT BE MOVED, BENT OR REALIGNED IN ANY MANNER. A NUT LOCKING DEVICE MUST BE INSTALLED ON ALL ANCHOR BOLTS.

FILE NO.

REVISIONS			
REV	DESCRIPTION	DWN	CHK APP
9	UPDATED TITLE BLOCK	JHY	JDH HA
	DATE: 05/13/2015		



ROHN PRODUCTS, LLC  
PO BOX 5999  
PEORIA, IL 61601-5999  
TOLL FREE 800-727-ROHN

THIS DRAWING IS THE PROPERTY OF ROHN. IT IS NOT TO BE REPRODUCED, COPIED OR TRACED IN WHOLE OR IN PART WITHOUT OUR WRITTEN CONSENT.

FOUNDATION & ANCHOR TOLERANCE

DWN:	CSR	CHKD:	KTL	DATE:	09/25/1987	
ENGR:	XK			SHEET #:	1 OF 1	
PRJ. ENGR:				PRJ. MANGER:		
DRAWING NO:	A810214				REV:	9