



# RG-CS86 Full-10G

## Series Switches

# 01

## Product Overview

RG-CS86 full-10G series switches are next-generation high-performance and strong-security 10G Ethernet switches newly released by Ruijie Networks. With the advanced hardware architecture and Ruijie latest modular OS, the RG-CS86 full-10G series switches are capable of providing faster hardware processing and better operation experience.

RG-CS86 full-10G series switches flexibly provide access services at multiple rates (10G/2.5G/1G) through 10G optical ports. They can connect to uplink

devices through high-performance 10G/40G ports and fully meet user requirements for high-density access and high-performance convergence.

RG-CS86 full-10G series switches switch provides robust performance, sound end-to-end service quality, and rich security settings for the convergence layer of large-sized networks and the core layer of medium- and small-sized networks. They can meet requirements of enterprise networks for high speed, security, and intelligence.

# 02

## Product Appearance



RG-CS86-20XS4VS2QXS-D

# 03

## Product Features

### IPv4/IPv6 Dual-Stack Multi-Layer Switching

The hardware of the RG-CS86 full-10G series switches supports line-rate IPv4/IPv6 dual-stack multi-layer switching, and differentiates and processes IPv4 and IPv6 protocol packets. Networks can be planned using the switches based on IPv6 network requirements, or flexible IPv6 network communication solutions can be drawn up, with the network status quo unchanged. The RG-CS86 full-10G series switches support a wide range of IPv4 routing protocols, including static routing, Routing Information Protocol (RIP), Open Shortest Path First version 2 (OSPFv2), Intermediate System to Intermediate System version 4 (IS-ISv4), and Border Gateway Protocol version 4 (BGP4). Users can select appropriate routing protocols based on network

environments, to flexibly build networks. The RG-CS86 full-10G series switches also support abundant IPv6 routing protocols, including static routing, Routing Information Protocol next generation (RIPng), OSPFv3, IS-ISv6, and BGP4+. A routing protocol can be selected flexibly to either upgrade the existing network to an IPv6 network or build a new IPv6 network.

### VSU

The RG-CS86 full-10G series switches support the Virtual Switch Unit (VSU) technology, in which multiple physical devices are connected through aggregate links and virtualized into one logical device. The devices use the same IP address, Telnet process, and command line interface (CLI) for

management, and support automatic version check and automatic configuration. Users need to manage only this logical device to enjoy the work efficiency and use experience brought by multiple devices.

Aggregate links can be 10G interfaces or dedicated stacking cards, which can maximize the return on investment for users.

**Simplified management:** Administrators can manage multiple switches in a unified manner, with no need to connect to each switch for configuration and management.

**Simplified network topology:** A VSU serves as a switch on a network and connects to peripheral devices through aggregate links. Therefore, no Layer 2 loop exists and the Multiple Spanning Tree Protocol (MSTP) does not need to be configured. Various control protocols run on the VSU.

**Fault recovery within milliseconds:** A VSU connects to peripheral devices through aggregate links. If one device or member link in the VSU malfunctions, data and services can be switched to another member link within only 50–200 milliseconds.

**High scalability:** User devices can be added to or removed from a virtualized network through hot swapping, without affecting normal operation of other devices.

### Sound Security Protection Policies

The RG-CS86 full-10G series switches effectively defend against and control the virus spread and hacker attacks by using multiple inherent mechanisms such as anti-DoS attack, anti-IP scanning, validity check of ARP packets on ports, and multiple hardware ACL policies.

The RG-CS86 full-10G series switches support hardware-based IPv6 ACLs, which can easily control the access of IPv6 users at the network boundary even in the presence of IPv6 users on an IPv4 network. The switches allow the coexistence of IPv4 and IPv6 users and can control the access permissions of IPv6 users, for example, restricting the access to sensitive resources on the network.

The hardware CPU protection mechanism provided by the RG-CS86 full-10G series switches is a special CPU protection policy, in which data traffic sent to the CPU is classified and processed by queue priority, and the bandwidth rate is limited as required. This mechanism fully protects the CPU against illegitimate

traffic occupancy, malicious attacks, and resource consumption, thereby ensuring the CPU security and protecting the switches.

The hardware of the RG-CS86 full-10G series switches flexibly binds a port or switch to a user's IP address and MAC address, to strictly restrict the access of users connected to a port or the switch.

DHCP snooping enables the RG-CS86 full 10G series switches to receive DHCP responses only from trusted ports and prevent spoofing from unauthorized DHCP servers. With DHCP snooping, the switches dynamically monitor ARP packets, check users' IP addresses, and discard illegitimate packets whose addresses do not match bound entries, thereby effectively preventing ARP spoofing and source IP address spoofing.

The switches support the source IP-based Telnet device access control, which can prevent unauthorized users and hackers from maliciously attacking and controlling the devices, thereby enhancing the network management security of the devices.

Through the Secure Shell (SSH) and Simple Network Management Protocol version 3 (SNMPv3), the RG-CS86 full 10G series switches can encrypt management information in the Telnet and SNMP processes, to ensure information security of management devices and prevent hackers from attacking and controlling the devices.

RG-CS86 full-10G series switches prevent unauthorized users from accessing networks by using multiple measures. Such measures include multi-element binding, port security, time-based ACL, and data flow-based bandwidth limit. These measures can help enterprise networks and campus networks control user access and restrict the communication of unauthorized users.

The Network Foundation Protection Policy (NFPP) supported by the RG-CS86 full-10G series switches is a protection mechanism for enhancing the switch security. It isolates the attack sources to protect the processor and channel bandwidth resources of switches, thereby ensuring normal forwarding of packets and protocol status.

### High Reliability

The RG-CS86 full-10G series switches are equipped with built-in redundant power modules and modular fan assemblies, which can be hot-swapped and do not affect the normal operation

of devices. In addition, the RG-CS86 full-10G series switches support fault detection and alarm functions for the power and fan modules. The fan speed can be automatically adjusted to better adapt to the ambient environment. The RG-CS86 full-10G series switches provide front-to-rear ventilation channels to improve the heat dissipation efficiency. The switches also provide device-level and link-level reliability protection as well as over-current protection, over-voltage protection, and overheating protection.

The Spanning Tree Protocols (STPs) (802.1d, 802.1w, and 802.1s) help the RG-CS86 full-10G series switches achieve fast convergence, improve the fault tolerance capability, and ensure stable network operation and load balance of links. The switches utilize network channels appropriately to raise the utilization of redundant links.

The Virtual Router Redundancy Protocol (VRRP) helps the switches effectively ensure the network stability.

With the Rapid Link Detection Protocol (RLDP), the switches can quickly detect the link connectivity and unidirectional optical fiber links. The port loop detection function helps the switches prevent network failures caused by loops resulting from unauthorized port connection to hubs.

When STP is disabled, the Rapid Ethernet Uplink Protection Protocol (REUP) can still provide basic link redundancy and millisecond-level fault recovery faster than STP.

The RG-CS86 full-10G series switches support Bidirectional Forwarding Detection (BFD), which provides upper-level protocols (such as routing protocols) with a method of rapidly detecting connectivity of the forwarding path between two routers. BFD greatly shortens the convergence time for the upper-level protocols in the case of link status changes.

### **Strong Multi-Service Support Capability**

The RG-CS86 full-10G series switches support the IPv4 and IPv6 multicast functions as well as multiple multicast protocols, including IGMP snooping, IGMP, Multicast Listener Discovery (MLD), Protocol Independent Multicast (PIM), PIM for IPv6, and Multicast Source Discovery Protocol (MSDP). The switches provide multicast service support for IPv4 networks, IPv6 networks, and IPv4 and IPv6 coexistent networks.

The IGMP source port and source IP check function supported by the switches can effectively eliminate illegitimate multicast sources and enhance the network security.

### **Sound QoS Policies**

The RG-CS86 full-10G series switches are capable of classifying and controlling various flows, including MAC flows, IP flows, and application flows, to implement fine flow bandwidth control, forwarding priority, and other flow policies. Furthermore, the switches can provide services based on applications and characteristics of the service quality required by different applications.

The DiffServ-centered QoS guarantee system supports 802.1p, IP ToS, Layer 2 to Layer 7 traffic filtering, SP, WRR, and other QoS policies, and implements the QoS logic for multiple services throughout the network.

### **Energy Efficiency**

The RG-CS86 full-10G series switches adopt the next-generation hardware architecture, and advanced energy-efficient circuit design and components to reduce energy consumption and noise. The RG-CS86 full-10G series switches are equipped with variable-speed axial fans to intelligently control the fan speed based on the current ambient temperature, so as to reduce the power consumption and noise while ensuring stable operation of the devices.

### **Flexible Device Management Modes**

#### **Ruijie Cloud Makes Your Business Easy**

The RG-CS86 full-10G series switches support Ruijie Cloud APP to management, and can bring customers simplified O&M management and user experience:

**Ease of networking:** Only a mobile phone available for Internet access is required to complete the device deployment. The switches support plug and play.

**Ease of O&M:** The O&M is simple. The network can be managed at any time, and you can manage the network wherever you go. VLAN visualized on Ruijie Cloud, lower technical barriers from configuration to management.

**Ease of monitoring:** You can view the network health and device details (system status, traffic trend, connectivity, power supply status, etc.) at any time.

Faults and user network experience are visible, alarms are pushed in time once they are generated, and logs are generated to facilitate event tracing.

The RG-CS86 full-10G series switches also support the Simple Network Management Protocol (SNMP), Remote Network Monitoring (RMON), Syslog,

Sampled Flow (sFlow), log and configuration backup using USB flash drives for routine network diagnosis and maintenance. Administrators can also use CLI, web-based management, Telnet, CPE WAN Management Protocol (CWMP/TR-069) based zero configuration and other methods to manage and maintain devices conveniently.

# 04

## Technical Specifications

### Hardware Specifications

Hardware Specifications		RG-CS86-20XS4VS2QXS-D
<b>Interface Specifications</b>		
Fixed Ports	20 x 1GE/2.5GE/10GE SFP+ ports, 4 x 10GE/25GE SFP28 ports, 2 x 40GE QSFP+ ports. One switch provides a maximum of 32 x 10GE ports, 2 x modular power slots, and 2 x modular fan slots.	
Fan module	Dual pluggable modular fans, with front-to-rear ventilation channels Fan speed regulating and alarm function	
Power module	2 x replaceable hot-swappable power supply slots	
Fixed management port	1 x MGMT port, 1 x console port, and 1 x USB port	
<b>System Specifications</b>		
Packet forwarding rate	570 Mpps	
Switching capacity	760 Gbps	
MAC address table size	32,768	
ARP table size	16,000	
Number of IPv4 unicast routes	16,000	
Number of IPv4 multicast routes	4,000	
Number of IPv6 unicast routes	16,000	
Number of IPv6 multicast routes	2,000	
Number of ACEs	In: 2,500 Out: 1,000	
Number of VSU members	2	
<b>Dimensions and Weight</b>		
Dimensions (W x D x H)	440 x 330 x 43.6 mm (17.32 in. x 12.99 in. x 1.72 in.), 1 RU	
Weight of the empty chassis	4.6 kg (10.14 lbs.)	
<b>CPU and Storage</b>		
CPU	Dual-core CPU, 1.25 GHz	
Flash memory	1 GB	
BootROM	16 MB	

Hardware Specifications		RG-CS86-20XS4VS2QXS-D
SDRAM		1 GB
Data packet buffer		4 MB
Power and Consumption		
Power supply		Supported power module type: RG-PA150I-F AC input: Rated voltage range: 100–240 V AC; 50/60 Hz Maximum voltage range: 90–264 V AC; 47/63 Hz Rated input current: 3 A  HVDC input: Rated voltage: 240 V DC Maximum voltage range: 192–288 V AC Rated current per circuit: 3 A
Maximum power consumption		< 85 W
Maximum output power		RG-PA150I-F: 150 W
Rated input voltage		RG-PA150I-F: AC input: Rated voltage range: 100–240 V AC; 50/60 Hz  HVDC input: Rated voltage: 240 V DC
Maximum input voltage		RG-PA150I-F: AC input: Maximum voltage range: 90–264 V AC; 47/63 Hz  HVDC input: Maximum voltage range: 192–288 V DC
Environment and Reliability		
Primary airflow		Front-to-rear airflow
Operating temperature		0°C to 50°C (32°F to 122°F)
Storage temperature		-40°C to +70°C (-40°F to +158°F)
Operating humidity		10% to 90% RH (non-condensing)
Storage humidity		5% to 95% RH (non-condensing)
Interface surge protection		Power port: 6 kV/6 kV Telecom port: 10 kV (MGMT port: 4 kV)
Temperature alarm		Supported

## Software Specifications

RG-CS86-20XS4VS2QXS-D	
Feature	Description
Ethernet Switching	Jumbo frame (maximum length: 9,216 bytes)
	IEEE 802.1Q (supporting 4K VLANs)
	Voice VLAN

RG-CS86-20XS4VS2QXS-D	
Feature	Description
Ethernet Switching	Super VLAN, private VLAN
	MAC VLAN, port-based VLAN, protocol -based VLAN, IP subnet -based VLAN
	GVRP
	Basic QinQ
	STP, RSTP, and MSTP
	ERPS (G.8032)
	LLDP/LLDP-MED
	LACP (IEEE 802.3ad)
IP Service	ARP
	DHCP client, DHCP relay, and DHCP server
	DHCP snooping
IP Service	DNS
	DHCPv6 client and DHCPv6 relay
	DHCPv6 snooping
	Neighbor Discovery (ND) and ND snooping
IP Routing	Static routing
	RIP and RIPng
	OSPFv2, OSPFv3, IS-ISv4, ISv4, and IS-ISv6
	BGP4 and BGP4+
	IPv4 and IPv6 VRF
	IPv4 and IPv6 PBR
	Equal and Weighted Cost Multi-Path (ECMP)
Multicast	IGMP v1/v2/v3, and IGMP proxy
	IGMP v1/v2/v3 snooping
	PIM-DM, PIM-SM, and PIM-SSM
	MSDP
	MLD v1/v2
	MLD snooping v1/v2
	PIM-SMv6 and PIM-SSM v6
	IGMP filtering, IGMP immediate leave
ACL and QoS	Standard IP ACLs Extended IP ACLs Extended MAC ACLs Time-based ACLs Expert-level ACLs ACL80 IPv6 ACL

RG-CS86-20XS4VS2QXS-D	
Feature	Description
ACL and QoS	ACL redirection
	Port traffic rate limiting
	Congestion management: RR, SP, WRR, DRR, WFQ, SP+WRR, SP+DRR, and SP+WFQ
	Congestion avoidance: tail drop, RED, and WRED
	802.1p/DSCP/ToS traffic classification Eight priority queues per port
Security	Multiple AAA modes
	RADIUS and TACAS+
	Port-based and MAC-based 802.1x authentication
	Web authentication
	HTTPS
Security	SSHv1, SSHv2
	Global IP-MAC binding
	Port isolation and port security
	IP source guard
	SAVI
	CPP and NFPP
	Strict and loose RPF
Reliability	REUP, RLDP, DLDP
	IPv4 VRRP v2/v3 and IPv6 VRRP
	BFD
	Hot swapping of power modules and cables
	3-level fan speed adjustment Fan fault alarm
Device virtualization	VSU
NMS and maintenance	SPAN, RSPAN, and ERSPAN
	sFlow
	NTP and SNTP
	FTP and TFTP
	SNMP v1/v2/v3
	RMON (1, 2, 3, 9)
	Telnet
	NETCONF
	CWMP (TR-069) standard protocol
	gRPC
	Cloud and SON



# 05 Typical Applications


- The RG-CS86 full-10G series switches can serve as convergence devices on large-sized networks or core devices on medium- and small-sized networks, and provide full-10G Layer 3 access services on large-sized enterprise networks or campus networks.
- The abundant security management mechanisms provide robust network security defense, high-security access control, and effective network access control.
- Sound management policies can be configured to help manage bandwidth so as to guarantee the bandwidth required by voice, multicast audio and video services, video on demand, and other key services.

## Scenario 1

The RG-CS86 full-10G series switches serve as convergence switches on large-sized campus networks. They provide 10G bandwidth for access devices and high-performance 40G bandwidth links from the convergence layer to the core layer, to cope with increasing information amount of access users.

## Scenario 2

The RG-CS86 full-10G series switches serve as 10G core switches on small- and medium-sized enterprise networks. The VSU technology helps simplify the network architecture and substantially improves the reliability and efficiency of the network system.

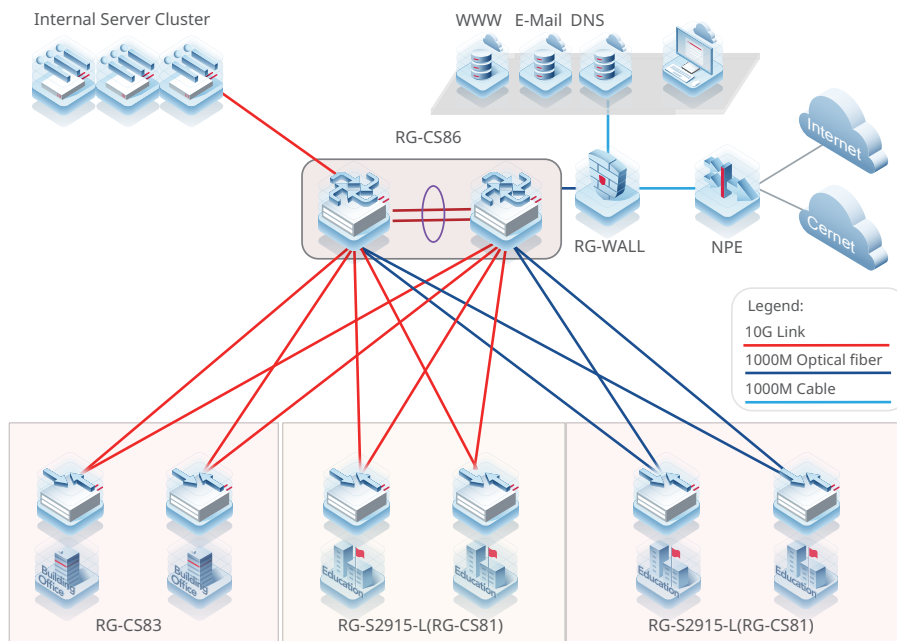

# 06

## Ordering Information

Model	Description
RG-CS86-20XS4VS2QXS-D	20 x 1GE/2.5GE/10GE SFP+ ports, 4 x 10GE/25GE SFP28 ports, 2 x 40GE QSFP+ ports, supports up to 32 x 10GE ports, 2 x slots for power supply module, requires at least one RG-PA150I-F power supply module, 2 x slots for fan modules, 2 x pre-installed fans (Purchase at least one RG-PA150I-F module.)
RG-PA150I-F	150 W AC power supply module for RG-CS86-20XS4VS2QXS-D
Mini-GBIC-GT	1000BASE-GT mini GBIC conversion module
MINI-GBIC-SX-MM850	1000BASE-SX, SFP transceiver, SM (850 nm, 500 m, LC).
MINI-GBIC-LX-SM1310	1000BASE-LX, SFP transceiver, SM (1310 nm, 10 km, LC)
MINI-GBIC-LH40-SM1310	1000BASE-LH, SFP transceiver, SM (1310 nm, 40 km, LC)
MINI-GBIC-ZX80-SM1550	1000BASE-ZX80, SFP transceiver, SM (1550 nm, 80 km, LC)
GE-SFP-LX20-SM1310-BIDI	SFP BiDi transceiver-Tx1310/Rx1550, 20 km, LC
GE-SFP-LX20-SM1550-BIDI	SFP BiDi transceiver-Tx1550/Rx1310, 20 km, LC
GE-SFP-LH40-SM1310-BIDI	SFP BiDi transceiver-Tx1310/Rx1550, 40 km, LC
GE-SFP-LH40-SM1550-BIDI	SFP BiDi transceiver-Tx1550/Rx1310, 40 km, LC
2.5G-SFP-LX03-SM1310-BIDI-I	SFP 2.5G BiDi transceiver-Tx1310/Rx1550, 3 km, LC
2.5G-SFP-LX03-SM1550-BIDI-I	SFP 2.5G BiDi transceiver-Tx1550/Rx1310, 3 km, LC
XG-SFP-SR-MM850	10G LC fiber module, applicable to SFP+ ports, max cabling distance: 300 m
XG-SFP-LR-SM1310	10G LC fiber module, applicable to SFP+ ports, max cabling distance: 10 km
XG-SFP-ER-SM1550	10G LC fiber module, applicable to SFP+ ports, max cabling distance: 40 km
VG-SFP-SR-MM850	25G fiber module
VG-SFP-LR-SM1310	25G fiber module
XG-SFP-AOC1M	10G SFP+ connector fiber, 1-meter long, including one cable and two connector modules
XG-SFP-AOC3M	10G SFP+ connector fiber, 3-meter long, including one cable and two connector modules
XG-SFP-AOC5M	10G SFP+ connector fiber, 5-meter long, including one cable and two connector modules
VG-SFP-AOC5M	25G Base SFP+ fiber cable (including modules on both ends), 5-meter long
40G-QSFP-SR-MM850	40G SR fiber module, applicable to QSFP+ ports (OM3/OM4 MPO interface, 8-core, 850 nm wavelength, max cabling distance: 100 m (OM3), 150 m (OM4))
40G-QSFP-LR4 SM1310	40G LR single-mode fiber module, applicable to QSFP+ ports, max cabling distance:10 km (LC, dual-core, 1310 nm wavelength)
40G-AOC-5M	40G QSFP+ connector fiber, 5-meter long, including one cable and two connector modules
40G-AOC-10M	40G QSFP+ connector fiber, 10-meter long, including one cable and two connector modules

# 07

## Package Contents

Device	RG-CS86-20XS4VS2QXS-D
Chassis	1
Fan (M1SFAN I-F)	2
Power supply filler panel	1
Rubber pad	4
Warranty Manual & RoHS Hazardous Substance Table	1
Grounding cable	1
M4*8FMO countersunk head screw	8
Introduction to Fixed Frame Installation	1
L-shaped fixed frame	1
Package dimensions (W x D x H)	545 x 500 x 232 mm (21.46 in. x 19.69 in. x 9.13 in.)
Package weight	6.40 kg (14.11 lbs.)

# 08

## Warranty

For more information about warranty terms and period, contact your local sales agency:

- Warranty terms: <https://www.ruijienetworks.com/support/servicepolicy>
- Warranty period: [https://www.ruijienetworks.com/support/service\\_41](https://www.ruijienetworks.com/support/service_41)

Note: The warranty terms are subject to the terms of different countries and distributors.

# 09

## More Information

For more information about Ruijie Networks, visit the official Ruijie website or contact your local sales agency:

- Ruijie Networks official website: <https://www.ruijienetworks.com/>
- Online support: <https://www.ruijienetworks.com/support>
- Hotline support: <https://www.ruijienetworks.com/support/hotline>
- Email support: [service\\_rj@ruijienetworks.com](mailto:service_rj@ruijienetworks.com)

The Ruijie logo is displayed in a bold, red, italicized sans-serif font. It is centered within a large, light blue, semi-transparent graphic that resembles a stylized 'R' or a network node. The background features abstract, overlapping geometric shapes in shades of blue and white, with thin red and blue lines curving across the page.

**Copyright ©2000-2023 Ruijie Networks Co., Ltd. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

**Notice**

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd  
Website: <https://www.ruijienetworks.com>