

### Electrical Specifications

• Frequency Range	2.4 – 2.5 GHz
• Gain	15 dBi
• Polarization	Dual Slant $\pm 45^\circ$
• Horizontal Beamwidth	120° (-6 dB), 85° (-3 dB)
• Vertical Beamwidth	11° (-6 dB), 8° (-3 dB)
• Side Lobes Level	-10 dB (Max.)
• VSWR	2 (Max.)
• Front-to-back Ratio	-25 dB (Max.)
• Isolation	20 dB (Min.)
• Impedance	50 $\Omega$
• Lightning Protection	DC Ground

### Environmental and Mechanical Specifications

• Temperature	-40 °C to +80 °C
• Humidity	95% at 55°C
• Wind Loading	Up to 216 km/h (134 mph)
• Radome Color	Gray
• Radome Material	ABS, UV Resistant
• Weight	2.3 kg
• Dimensions	806 x 122 x 57 mm
• Connector	2 x N-female
• Mechanical Downtilt	+22/-17° (Max.)




### Mounting Scenario




### Antenna Patterns


H-plane Co-polarization, Port 1

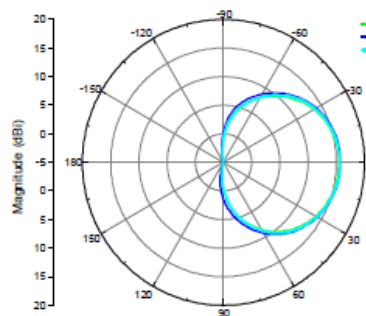


H-plane Co-polarization, Port 2

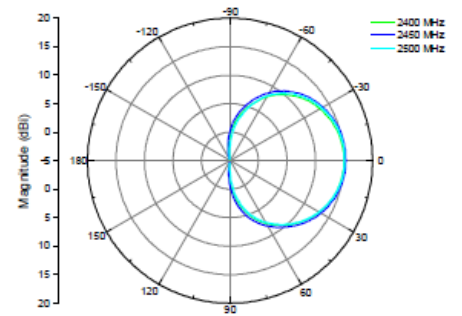

V-plane Co-polarization, Port 1

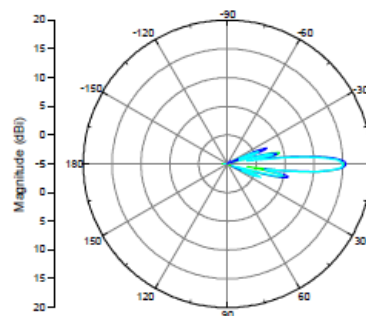

V-plane Co-polarization, Port 2

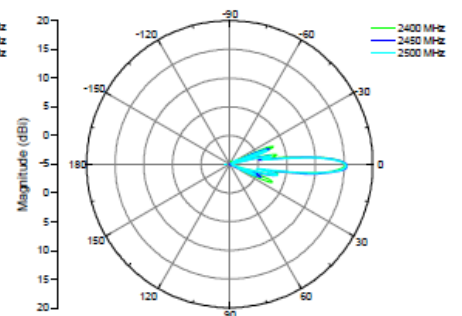

### Product Ordering Information

- 2.4 GHz, 15 dBi Sector Antenna

#### Contact Us

- Email: [sales@altaitechnologies.com](mailto:sales@altaitechnologies.com)

AN-PB-140303

Although Altai has attempted to provide accurate information in these materials, Altai assumes no legal liability for the accuracy and completeness of the information. All specifications are subject to change without notice.