## INSTALLATION MANUAL

## **ENFORCER®**

**55-077** and **55-078** 

## Hold-up Buttons

- Highly reliable switch mechanism
- Attractive, durable stainless steel housing
- Compact size
- High-security key reset
- Use with either N.C. or N.O. inputs

The SS-077 and SS-078 Hold-up Buttons are the perfect units for activating hold-up circuits, cameras, etc. Because of its superior construction and solidstate design, these units can be used for silent operation, or, if you wish, these units can be conveniently connected to sound a bell, siren, or other signalling device when triggered. The highly reliable switch mechanism ensures that these units will give you years and years of trouble-free operation.

Once activated, the SS-077 and SS-078 latch-in and an indicator flag will clearly show which hold-up switch was depressed - a great help when more than one unit is used. The unit can only be reset by authorized person with the key.

Contacts

SS-077-Normally closed, latching open

SS-078-Normally open, latching closed

Switch Type

**SPST** 

Switch rating 12VDC @ 1Amp

Terminal type

Screws (2)

Mounting type

Surface

Size

(L) - 2-3/4" (70mm) (W) - 1-1/4" (56mm) (H) - 1-1/16" (27mm)

Case

ABS plastic

Cover

Stainless steel



SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606 Tel: 800-662-0800 / 949-261-2999 Fax: 949-261-7326




Red

SS-077



SS-078



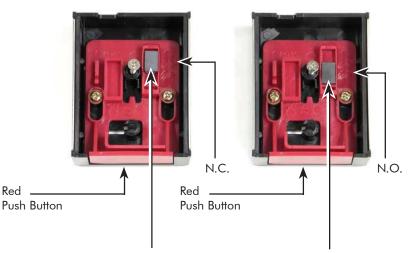

With SS-077 the magnet is in the UP (N.C.) position.

With SS-078 the magnet is in the DOWN (N.O.) position.