


SLA-5M3700D/5M4600D/5M7000D

Interchangeable 5MP lenses for PNM-9000VD



Dimensions

Unit : mm (inch)

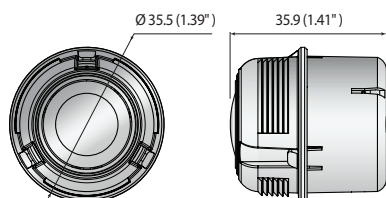

Key Features

- 0.16Lux@Color, B/W
- WDR 120dB, Day&Night (Electrical)
- Selectable lens options
- 3.7 / 4.6 / 7.0mm fixed lens

	SLA-5M3700D	SLA-5M4600D	SLA-5M7000D
VIDEO			
Imaging Device	1/1.8" 5MP CMOS	1/1.8" 5MP CMOS	1/1.8" 5MP CMOS
Effective Pixels	2616(H) x 1976(V)	2616(H) x 1976(V)	2616(H)x1976(V)
Minimum Illumination	Color : 0.16Lux (F1.6, 1/30sec, 30IRE) B/W : 0.16Lux (F1.6, 1/30sec, 30IRE)"	Color : 0.16Lux (F1.6, 1/30sec, 30IRE) B/W : 0.16Lux (F1.6, 1/30sec, 30IRE)	Color : 0.16Lux (F1.6, 1/30sec, 30IRE) B/W : 0.16Lux (F1.6, 1/30sec, 30IRE)
LENS			
Focal Length	3.7mm fixed focal	4.6mm fixed focal	7.0mm fixed focal
Maximum Aperture Ratio	F1.6	F1.6	F1.6
Angular Field of View	H : 97.5°, V : 71.9°, D : 126.2°	H : 77.9°, V : 57.9°, D : 98.7°	H : 50.7°, V : 37.8°, D : 63.8°
Lens Type	Fixed focal	Fixed focal	Fixed focal
PAN / TILT / ROTATE			
Pan / Tilt / Rotate Range	-90°~+90° / +36~+73° / -180°~+180°	-90°~+90° / +21°~+85° / -180°~+180°	-90°~+90° / +12~+93° / -180°~+180°
OPERATIONAL			
Wide Dynamic Range	120dB	120dB	120dB
Day & Night	Auto (Electrical)	Auto (Electrical)	Auto (Electrical)
MECHANICAL			
Color / Material	Black / Plastic	Black / Plastic	Black / Plastic
Product dimensions / weight	Ø35.5 x 35.9mm (1.40 x 1.41") / 35g (0.08 lb)	Ø35.5 x 35.9mm (1.40 x 1.41") / 35g (0.08 lb)	Ø35.5 x 35.9mm (1.40 x 1.41") / 35g (0.08 lb)