


Product Specification

Model No: TERS30

1.Drawing (Unit mm)

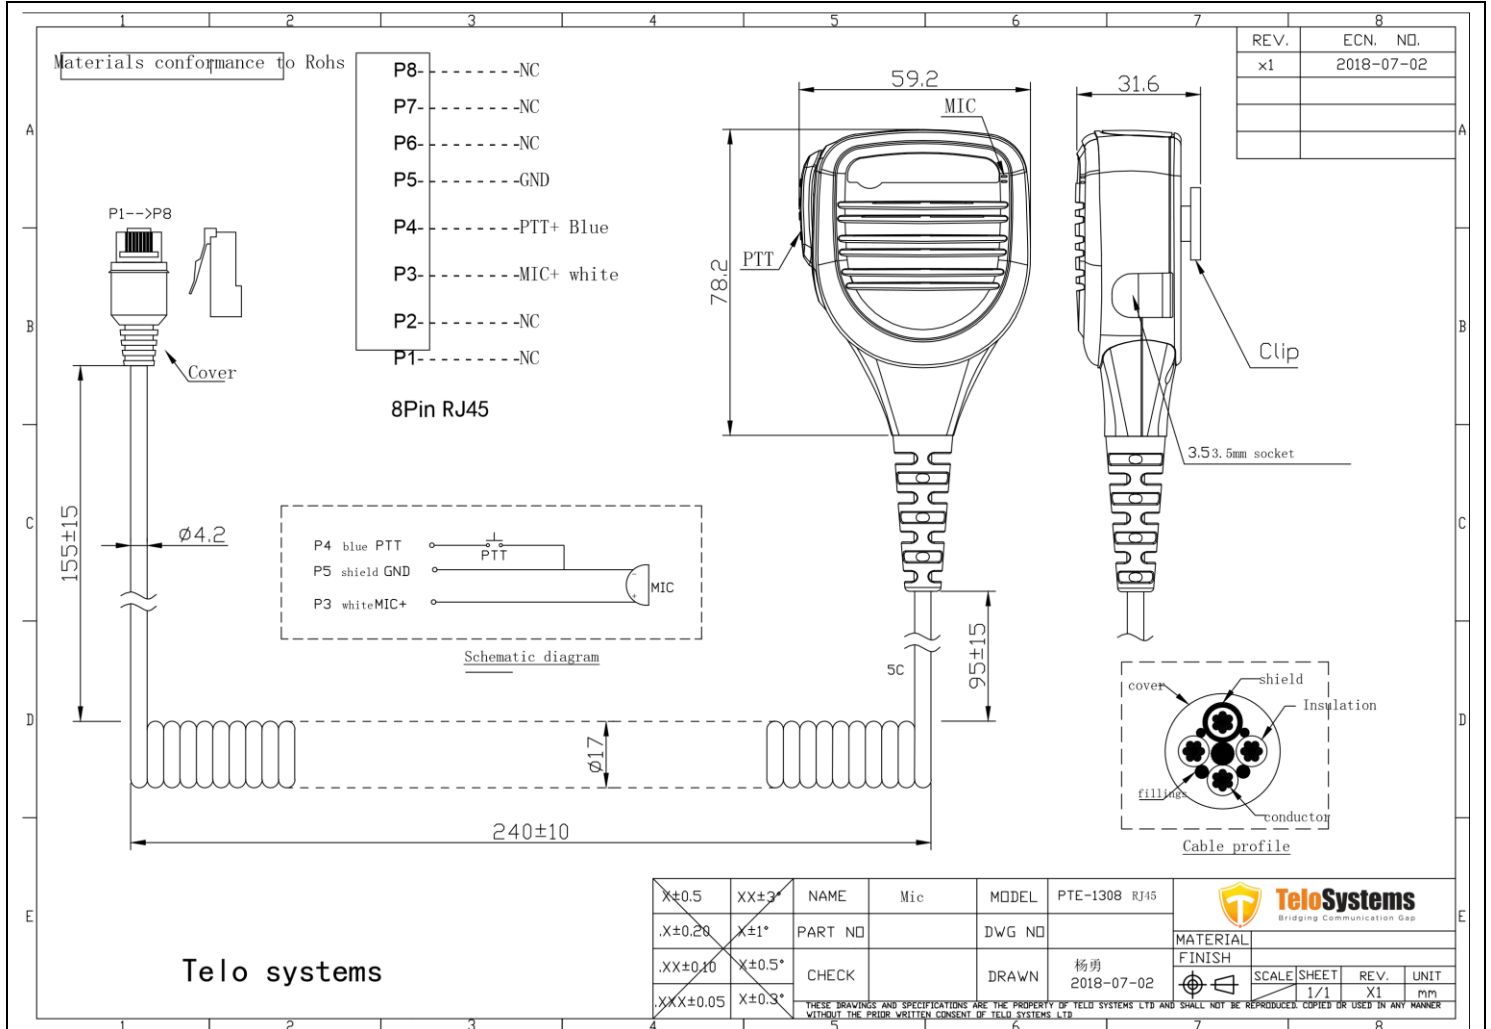

Sensitivity Range	-30± 4dB RL=1.0K Ω Vs=2.0V(DC) 1KHz
Impedance Max	2.2KΩ 1kHz (RL=2.2KΩ)
Frequency	20-20KHz
Current Consumption Max	0.5uA RL=2.2K Ω Vs=3.0V(DC)
Operation Voltage Range	1.1-10V (DC)
Max Sound pressure Level	115dB At 1KHz THD<1