


Version	Explain	Date
A		2014.12.09

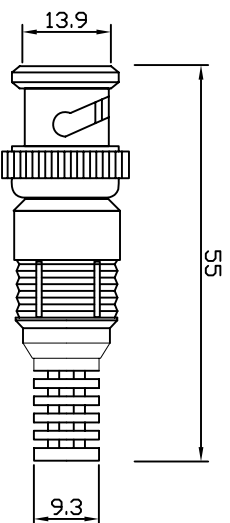

Technical parameters:

Working temperature:  $-55^{\circ}\text{C} \sim 155^{\circ}\text{C}$

Relative humidity:  $\leq 95\%$  ( $40^{\circ}\text{C}$ )

Main technical characteristics:

Frequency range: 0-4hz

Working voltage: 500v(50hz rms)

Standard retention:  $\geq 0.25\text{N}$

Pullout force:  $\leq 20\text{N}$

Contact resistance:  $\leq 2.5\text{m}\Omega$

Insulation resistance:  $\geq 5000\text{m}\Omega$

Standard withstanding voltage: 1500V (50hz rms)

Mechanical durability: 500 times

Elastic parts: beryllium bronze, gold-plated

phosphor

bronze, silver plated

Inelastic parts: Nickel-plated brass

Insulating medium: PTFE

Sealing ring: silicone rubber

general tolerance	CUSTOMER:	CUST NO:		
X	PRODUCT NO:	PART NO:		
X X	BNC Male Black Plastic	TT-RG97		
X XX		DRAWING SIZE	1:1	A1
X XXX		CHECKED BY	UNIT	mm
		DRAWN BY	PAGE	1 OF 1
		APPROVED BY		
		SORTING NO.		