

Electrical Data


Frequency:	2300-2500 MHz
Gain:	24 dBi
VSWR:	<1.5:1
Polarization:	Horizontal or Vertical
Horizontal Beamwidth :	9.5°
Vertical Beamwidth:	13°
Nominal Impedance:	50 Ohms
F/B Ratio:	>30
Max Input Power:	100 W
Lightning Protection	DC Ground

Mechanical Data


Connector :	N Female
Dimensions:	900*600*380mm
(diameter*height)	/35.44*23.63*14.96in
Weight:	3.2kg/7.05lb
Reflector Material:	Brass
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data

Packing Qty:	5pcs/Carton
Carton Size:	630*565*230mm
(length*width*height)	24.8*22.2*9.1 in
Packing Weight:	17.5kg/38.5lb

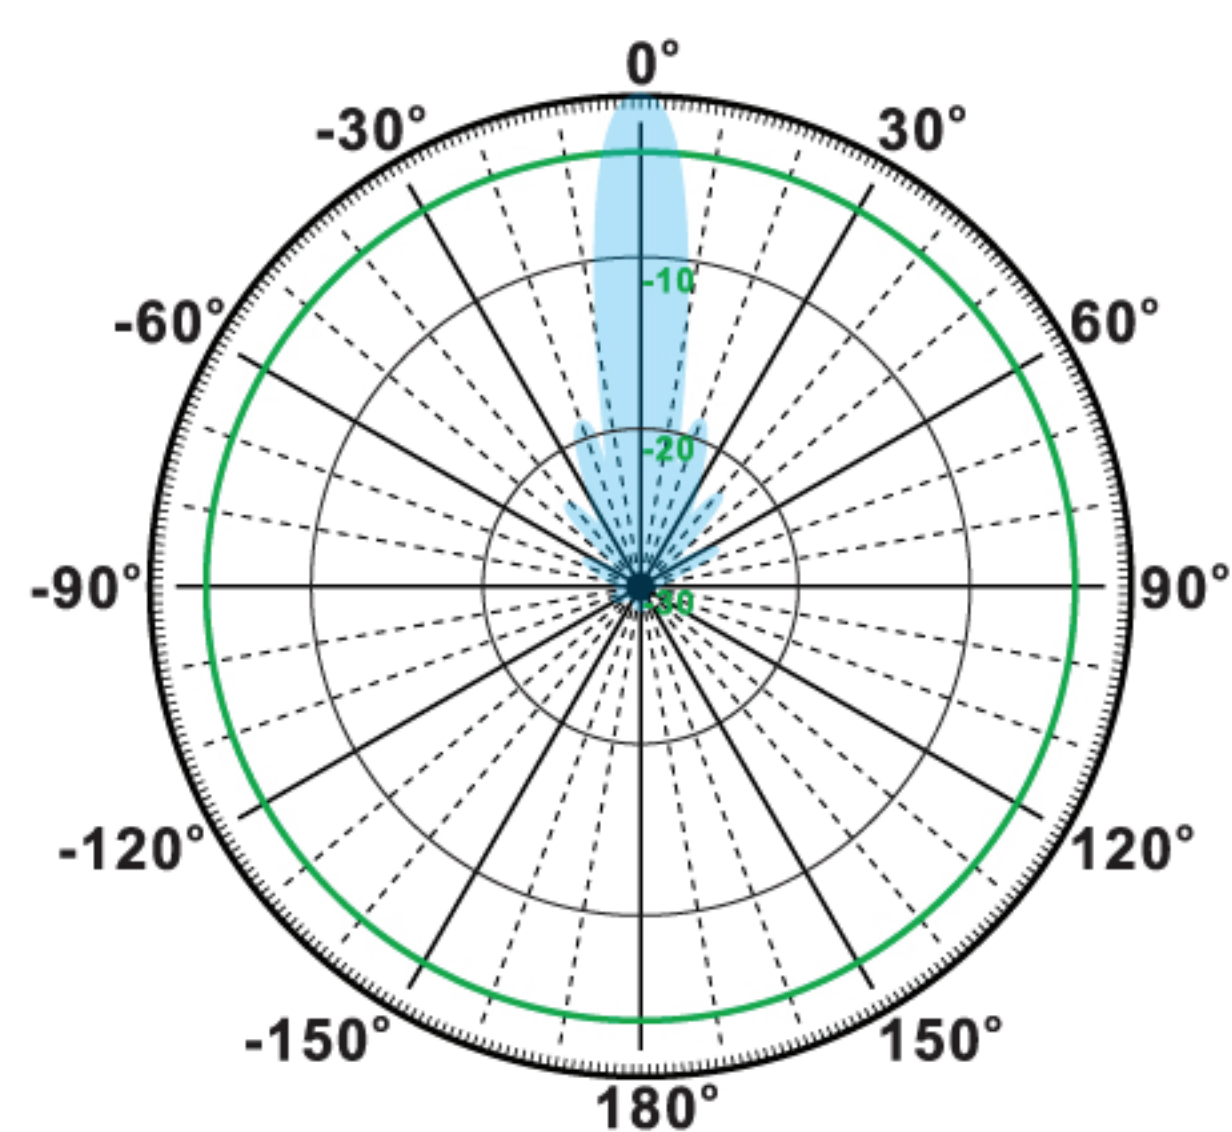

H-Plane

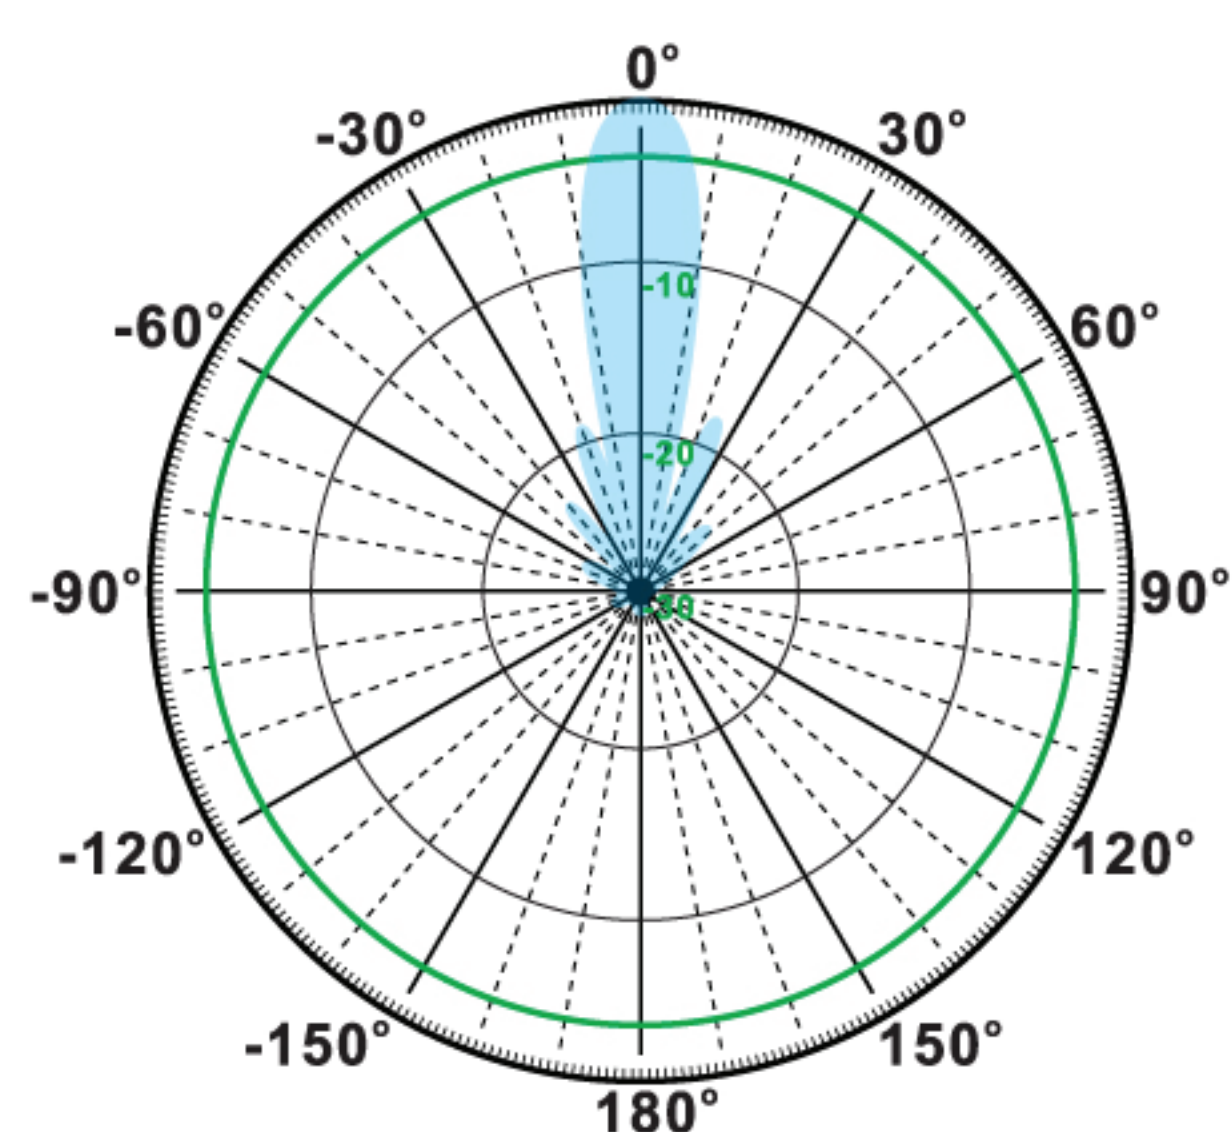

V-Plane

