




# Especificaciones

Display	Pantalla a color TFT LCD de 2,4 pulgadas
Capacidad de huellas	3000
Capacidad de Tarjetas	5000(Optional) ID or IC Card
Capacidad de Eventos	30,000
Sensor	Sensor BioID / Sensor SilkID Sensor (opcional)
Algoritmo de Huella	ZKFinger VX10.0
Comunicación	RS232/485, TCP/IP, USB-host,Wi-Fi
Interfaz de control de acceso	3rd Party Electric Lock, Door Sensor, Exit Button, Alarm
Wiegand	Entrada, Salida
Entrada Auxiliar	1 Entrada
Funciones	DST, consulta de registro, ID de usuario de 14 dígitos, anti-passback, timbre programado, impresora (opcional), ADMS (opcional)
Fuente de alimentación	12V DC,3A
Temperatura de funcionamiento	0 °C- 45 °C
Humedad de funcionamiento	20%-80%
Dimensiones (LxWxH)	158.5x78.0x19.4mm
SDK y software	PUSH AC SDK, ZKBioAccess software


## Accesorios Opcionales



## Configuración

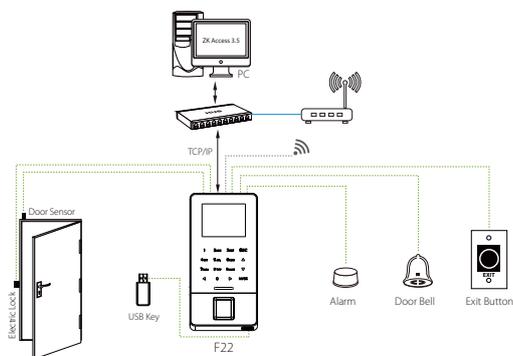

## Dimensiones (mm)

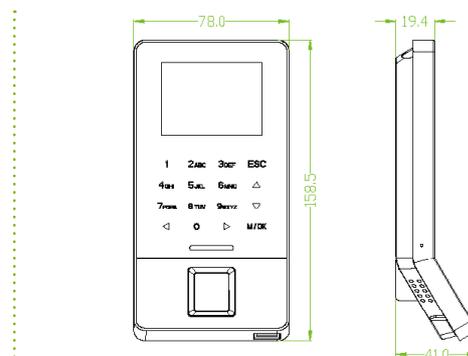

ZKTECO CO.,LTD.  
[www.zkteco.com](http://www.zkteco.com)  
 E-mail: [sales@zkteco.com](mailto:sales@zkteco.com)

© Copyright 2016. ZKTECO CO.,LTD. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

