

ENS-SRJ45-CAT6

SPECIFICATION NOTES:

1. ELECTRICAL:




- 1.1 VOLTAGE RATING: 150 VAC RMS
- 1.2 CURRENT RATING: 1.5 AMP
- 1.3 CONTACT RESISTANCE: 20mΩ MAX.
- 1.4 INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
- 1.5 WITHSTAND VOLTAGE: 1000V D.C. or A.C. PEAK; ONE CONTACT TO ALL OTHER CONTACTS CONNECTED TOGETHER. 1500V D.C. OR A.C. PEAK; ALL CONTACTS CONNECTED TOGETHER TO SHIELD, (HOUSING/MOUNTING PLATE) IF PRESENT. @ 0.5mA 50 Hz OR 60 Hz A MINUTE

2. MECHANICAL:

- 2.1 RETENTION STRENGTH: 50N MIN. FOR 60S ± 5S
- 2.2 OPERATING LIFE: 750 CYCLES MIN.
- 2.3 INSERTION FORCE: 30N MAX.

3. ENVIRONMENTAL:

- 3.1 OPERATION: -25°C ~ +55°C GB 10753-89
- 3.2 STORAGE: -10°C ~ +40°C RELATIVE HUMIDITY < 80%, GB 10753-89
- 3.3 STORAGE TIME: 12 MONTHS
- 3.4 SALT SPRAY TEST: SEE TABLE

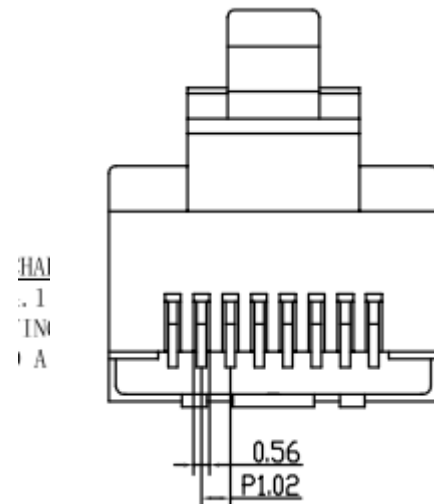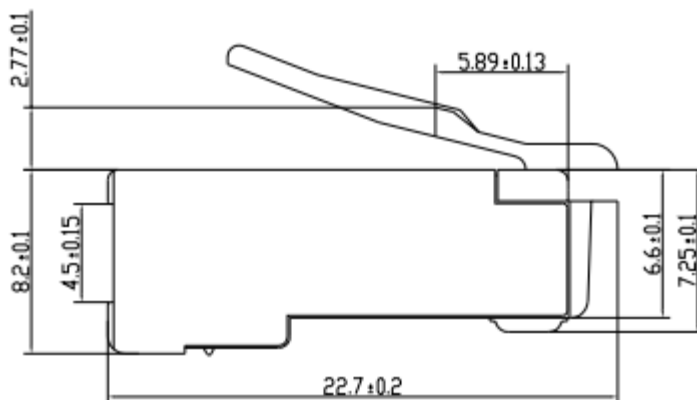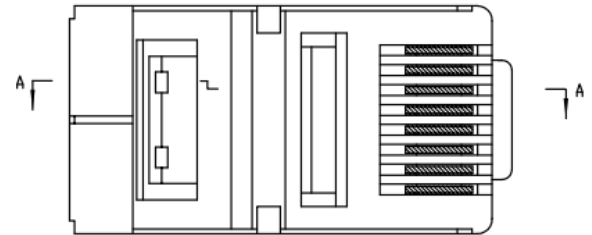

enson®

