



Fanvil i60K SIP Door Phone

Description

Fanvil i60K is a SIP door phone with a speed dial button, a numeric keypad, and an IP65 rating for indoor and outdoor use. It supports various door-opening methods such as password, Bluetooth, IC/ID card, and DTMF Code for streamlined access management and is equipped with a 2 mega-pixel camera for audio and video communication. Compatible with SIP and ONVIF, it integrates with security systems and is ideal for villas, apartments, and communities.

Main Features



1 speed-dial button and a numeric keypad



Equipped with a 2 mega-pixel HDR high-definition camera, it provides clearer imaging




IP65 high protection rating with wide temperature rate from -40°C to 70°C, suitable for harsh outdoor environments



Rich interfaces for security device connectivity



Support the standard ONVIF protocol, providing high flexibility and excellent compatibility

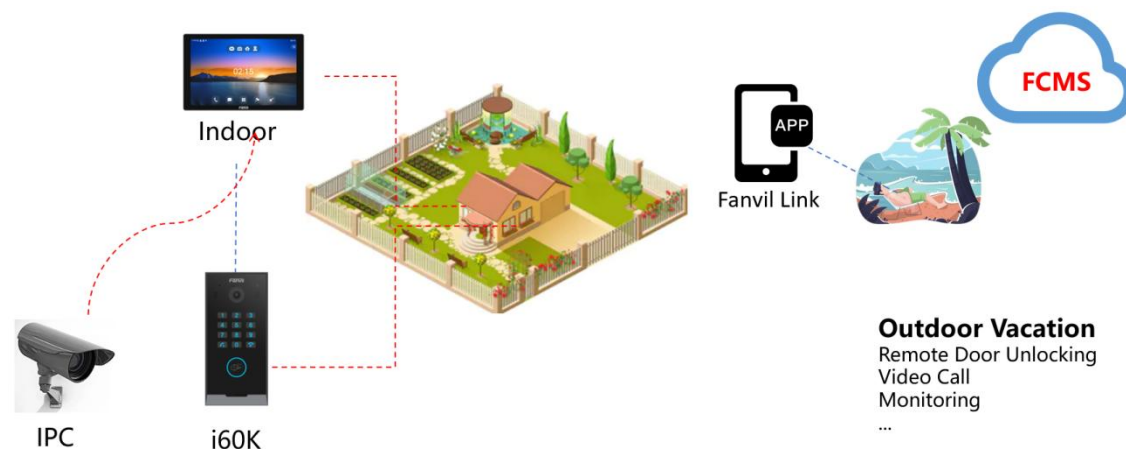

Specifications

Panel Type	Multi-apartment, Community, Villa
Keyboard	1 speed-dial button and a numeric keypad
Body	ABS+PC
Colors	Panel: black, Housing: Gunmetal
Sensor	1/2.9-inch, CMOS
Camera	2 Mpx, Support infrared
Viewing Angle	140°(FOV) 100°(Horizontal) 57°(Vertical)
Output video	H.264 (Baseline, Main Profile)
Light Sensitivity	0.1Lux
Card Storage	1,0000
Power Consumption	PoE:1.63~6.93W Adapter: 1.51~6.16W
Power Supply	DC 12V / 1A PoE 802.3af Class 3
Working Temperature	-40°C~+70°C
Storage temperature	-40°C~+70°C
Size of the Panel (LWH)	70.7*149.7*30mm
IP / IK Level	IP65
Installation	Wall-mounted Rain cover

Functional Capabilities

Supported Protocols	SIP 2.0 over UDP/TCP/TLS
Lock Opening	IC Card, By DTMF Code, Remote Door Opening, Password, BLE
Interface	Wiegand Input/Output Short Circuit Input/Output
Supported Wiegand	26, 34 bit
Supported ONVIF Types	Profile S
Supported Standards	DTMF, IC Card, Indoor Switch, BLE Cards 13.56 MHz
Talking Mode	Full duplex (High-definition Audio)
Additionally	Built-in relay, Motion detection, Tamper Alarm, TF Card, Open API