

# TS Kompakt



**PM DC & Special Assignments**  
**Grigory Trusov**

Ennepetal, January 2013

## The efficient solution for standard doors

---



- Can be universally used on all common door types
- Particularly quick and easy to install – does not require a mounting backplate
- The door closer TS Kompakt is C-UL-US listed

## Benefits for different target groups

---

### ■ For the trade

- Ideal solution for standard doors
- Just one model for all sizes to simplify stocking


### ■ For the user

- Two valves for optimum closing speed adjustment


### ■ For the installer

- Non-handed unit
- Quick and easy to install
- Fixes perfectly to all door types without the need for a mounting backplate
- One model for all mounting positions
- Slender body

## Functions Overview

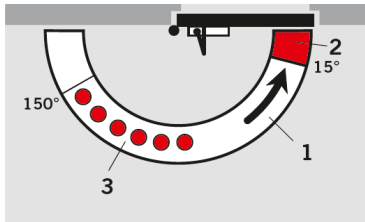


- 1 Adjustable closing speed in the range 180°– 15°
- 2 Adjustable latching action in the range 15°– 0°
- 3 Hold-open range with hold-open arm model (optional extra)

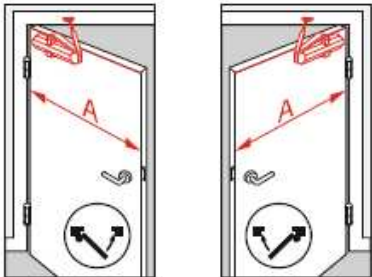

- Non-handed for all mounting position

## One door closer and one design for three different door sizes

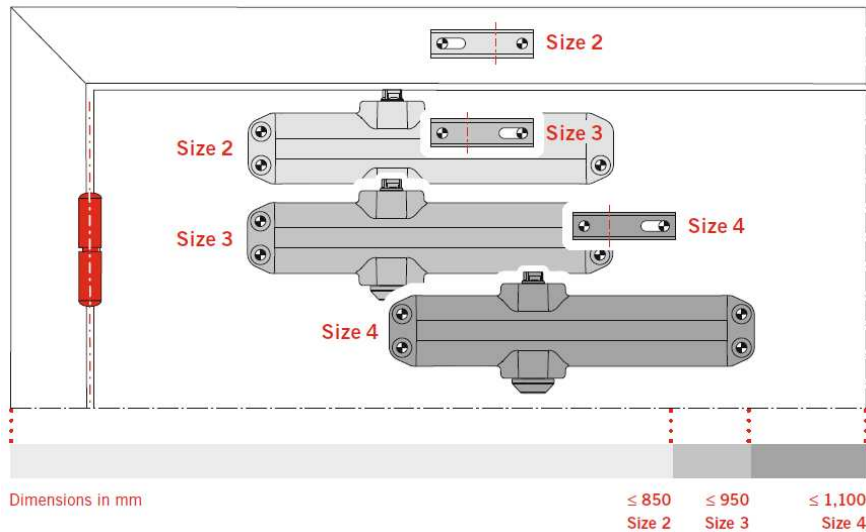

Rack and pinion door closer with selectable closing force, size 2, 3 and 4 and adjustable closing speed in two independent ranges.

### ■ Closing force settings

- The TS Kompakt size setting is selected for the door width by moving the closer body and/or turning the arm power shoe
- Door width Size setting
  - ≤ 850 mm Size 2
  - ≤ 950 mm Size 3
  - ≤ 1,100 mm Size 4

### ■ Product Data

- Weight in kg 1.3
- Length 205.5 mm
- Overall depth 46.5 mm
- Height 40 mm

## Recommendations

---



- If the use of a door closer with mounting plate is required, we recommend the DORMA TS 73 V, TS 72, TS 71



- For high and heavy doors, external doors and for doors required to close against high wind pressure, we recommend the DORMA TS 83