




"Beyond Your Expectations"®

INSTALLATION INSTRUCTIONS

Model:

LMG-150-3

VHF 3 dB
Motorola (NMO) Style
Mobile Antenna

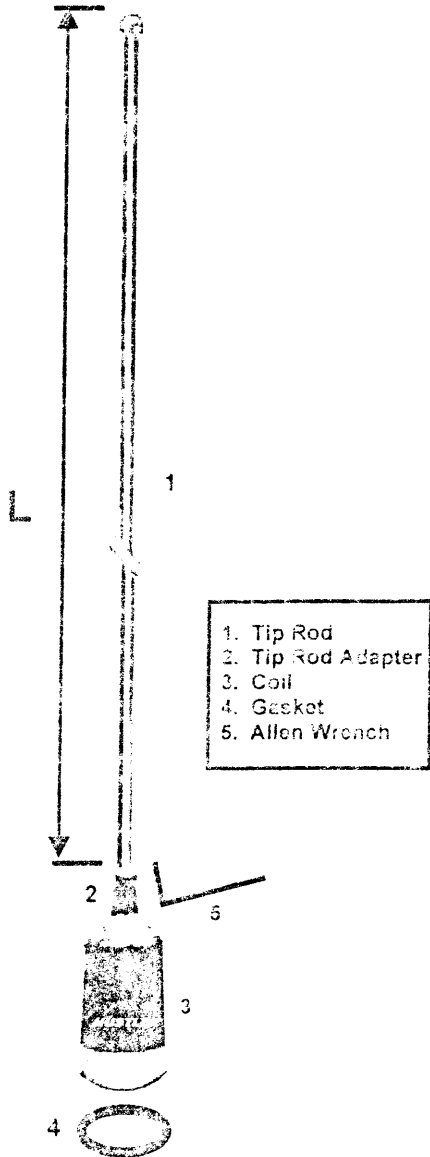

1. Tip Rod
2. Tip Rod Adapter
3. Coil
4. Gasket
5. Allen Wrench

Mount the LMG-150 as near to the center of the roof, fender, or trunk of the vehicle as is practical. Install Motorola style mount and coax assembly as specified by the manufacturers instructions (see NOTE below). Place the gasket around the mount and thread the coil onto the mount. Be sure to tighten the coil sufficiently to ensure mechanical stability and seal against moisture. Do not over-tighten.

Consult the CUT CHART for the nominal exposed tip rod length "L" between the top of the adapter and the the top of the tip rod. Add one inch to this length to assure an adequate amount of rod below the top of and inside the adapter. Cut the lower end of the rod to this length. Remove any burrs created by the cutting process. Insert the base of the tip rod into the top of the adapter. Use the allen wrench to adjust the length of exposed tip rod to the CUT CHART length L. To insure reliable performance, it is recommended that a reliable SWR bridge be used to accurately tune the antenna to your required frequency and application.

NOTE: Mount/Coax Assembly may be purchased separately or in a kit with your LMG-150.

LMG150-3: P/N 9741
HDW Kit: P/N 9741-2



NEW-TRONICS Antenna Corporation

One Newtronics Place
Mineral Wells, Texas 7606-9563

REV 0 10/97

Printed in USA

(940)-325-1386

LMG-150-3 Cut Chart



NEW-TRONICS ANTENNA CORPORATION LIMITED WARRANTY

New-Tronics Antenna Corp. warrants its products to be free of defects in material and workmanship and extends this warranty under intended use and normal service conditions to the original owner for a period of two years from the date of purchase. This warranty does not apply to any product that has been repaired or altered in any manner and is void for any damage due to accident, neglect, unreasonable use, improper installation, or any other cause not arising out of defects in material or workmanship.

The obligations of New-Tronics Antenna Corporation are limited to repairing or replacing, at its option, any product or part that is returned to the factory; all transportation charges prepaid, accompanied by proof of purchase, and upon examination reveals to have been defective within the warranty period stated above.

New-Tronics Antenna Corp. does not assume nor is any person authorized to assume for it, any obligations other than that herein stated.

Any implied warranties, including but not limited to fitness for a particular purpose, is limited in duration for the above two year period. New-Tronics Antenna Corp. shall not be liable under this warranty, or any implied warranty, for loss of use of the product or for other consequential loss or damage incurred by the purchaser. Some states do not allow the exclusion or limitation of implied warranties of consequential damages and so the above exclusions or limitations may not apply in those states. This warranty gives you special legal rights and you may have other rights that vary from state to state.

New-Tronics Antenna Corporation
One Newtronics Place
Mineral Wells, Texas 76067-9563

(940) 325-1386



"Beyond Your Expectations"